

Typical 2D Details







Typical 2D Details

Table of Contents

1. Typical Application (Plan View)

2. Typical Application (Isometric)

3. Aesthetic Reveal

4. Insulation Board & Reinforcing Mesh at Openings

5. Window Head (Flush)

6. Window Head (Recessed)

7. Window Jamb (Flush)

8. Window Jamb (Recessed)

9. Window Sill (Flush)

10. Window Sill (Recessed)

11. Roof Edge Flashing

12. Metal Coping

13. EPS Parapet Cap

14. Expansion Joint at Floor Line

15. Expansion Joint at Change in Substrate

16. Section at Fascia - Soffit

17. Vertical Expansion Joint

18. Pipe Penetration

19. Corner Mesh Application with Strong 15 or Ultra HI 20

20. Corner Mesh Application with Standard 4, Intermediate 6 or 12

21. Light Fixture

22. Termination at Foundation

23. Termination at Foundation (Flush)

24. Kick-Out Flashing at Flat Roof


Notes:

- The details within are the latest recommendations and are represent in good faith by Sika Corporation US (hereinafter Sika). The details are subject to change without notice. Sika accepts no liability for the end use of the details. For conditions not shown, consult Sika for review of specific details.
- Install Sika materials in accordance with current installation instructions.
- · Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.





TYPICAL APPLICATION (PLAN VIEW)

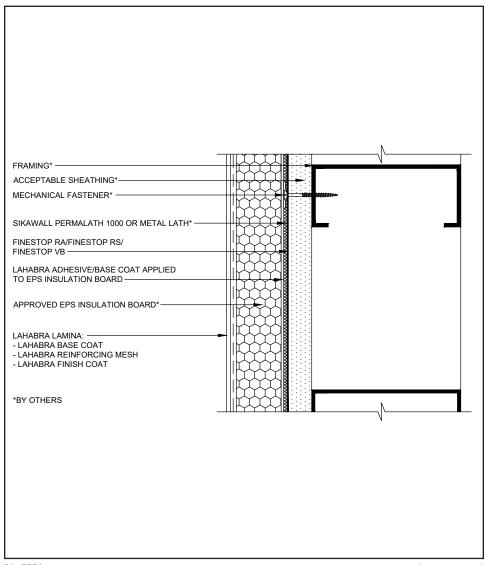

- Apply mixed LaHabra Adhesive/ Base Coat to entire surface of insulation board using a stainless steel trowel with ½" x ½" (13 mm x 13 mm) notches spaced 2" (50 mm) apart. Ribbons of adhesive must be applied parallel to the 2' (610 mm) dimension of the EPS insulation board to ensure they are vertical when the EPS insulation board is applied to the lath.
- Set EPS insulation board into place and apply pressure over entire surface of board to ensure positive uniform contact and high initial grab. Do not slide board into place.
- Install lath per ASTM C1063.


01 0524 (*NOTE: BY OTHERS)

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.





TYPICAL ADHERED MAT DESIGN APPLICATION (ISOMETRIC)

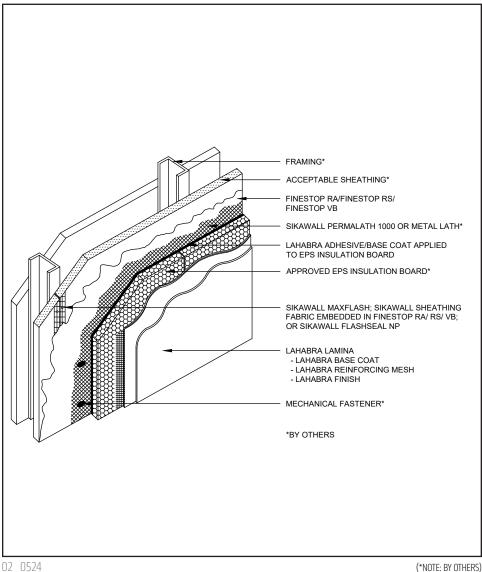


- Apply mixed LaHabra Adhesive/ Base Coat to entire surface of insulation board using a stainless steel trowel with $\frac{1}{2}$ " x $\frac{1}{2}$ " (13 mm x 13 mm) notches spaced 2" (50 mm) apart. Ribbons of adhesive must be applied parallel to the 2' (610 mm) dimension of the EPS insulation board to ensure they are vertical when the EPS insulation board is applied to the lath.
- Set EPS insulation board into place and apply pressure over entire surface of board to ensure positive uniform contact and high initial grab. Do not slide board into place.
- Install lath per ASTM C1063.

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.





TYPICAL AESTHETIC REVEAL

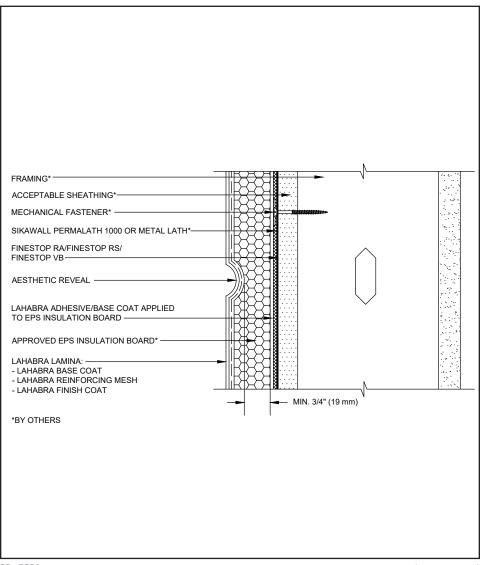

- Maintain a continuous layer of EPS insulation board, at a minimum 3/4" (19 mm) thickness, behind all reveals and aesthetic grooves.
- Reinforcing mesh shall be continuous and care shall be taken to ensure reinforcing mesh is not cut during base coat application.
- Horizontal reveals shall provide for outward positive drainage.
- Reveals must not occur at the abutment of two pieces of EPS insulation board.


03 0524 (*NOTE: BY OTHERS)

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.





TYPICAL INSULATION BOARD & REINFORCING MESH AT OPENINGS

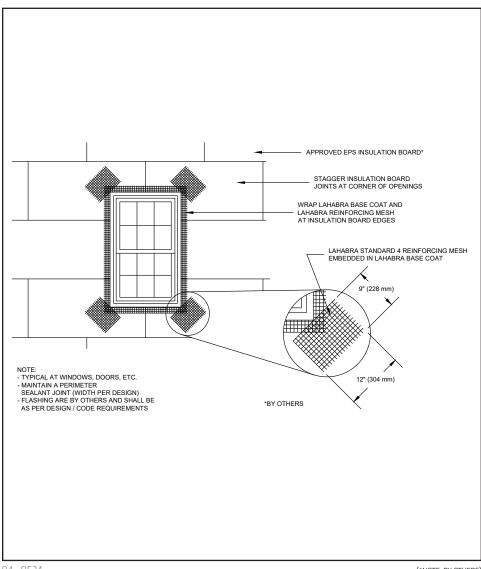

- Stagger joints horizontally in a running bond pattern offset a minimum of 6".
- Pre-cut insulation board to fit openings and projections.
 Insulation board must be a single piece around corners of openings.
- Stagger vertical joints and corners.
 Stagger insulation and sheathing board joints.
- Offset insulation board joints from sheathing joints by a minimum of 16".

04 0524 (*NOTE: BY OTHERS)

The details within are the latest recommendations and are represented in good faith by Sika Corporation US (hereinafter Sika). The details are subject to change without notice. Sika accepts no liability for the end use of the details. For conditions not shown, consult Sika for review of specific details.


- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.

Technical Service



Pebbletex Adhered Mat CI Design

TYPICAL WINDOW HEAD (FLUSH)

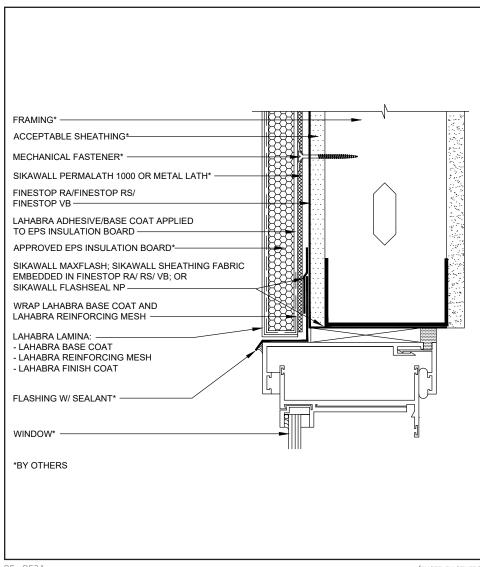

- All terminations must be fully encapsulated with mesh reinforced base coat. Pre-backwrapping is recommended at drainage terminations. Extend reinforcing mesh a minimum of 2 ½" onto back of insulation board.
- Ensure a means for drainage is provided at system termination at window head.
- Provide end-dams at flashing terminations.
- LaHabra Transition Treatment
 Options: SikaWall MaxFlash,
 SikaWall Sheathing Fabric
 embedded in Finestop RA/RS/VB
 or SikaWall Flash Seal NP.
- Prior to window and EPS installation, ensure water-resistive barrier is properly applied into the rough openings in accordance with LaHabra application guidelines and code requirements. Reference LaHabra Finestop published typical details.
- Consult window and sealant manufacturers to verify window installation, detailing and to ensure no water leakage into the wall assembly.


05 0524 (*NOTE: BY OTHERS)

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.



Pebbletex Adhered Mat CI Design

TYPICAL WINDOW HEAD (RECESSED)

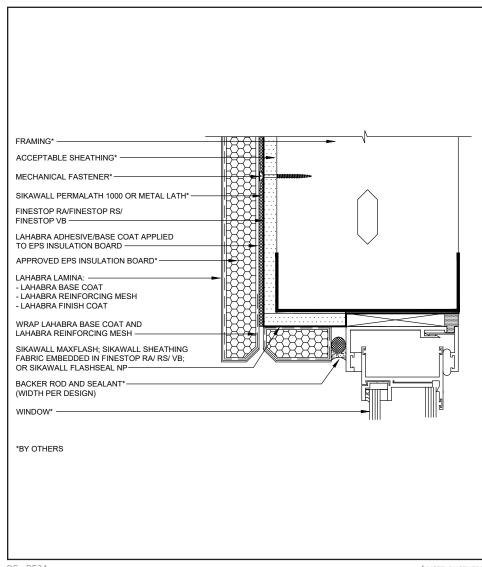

- All terminations must be fully encapsulated with mesh reinforced base coat. Pre-backwrapping is recommended at drainage terminations. Extend reinforcing mesh a minimum 2 ½" onto back of insulation board.
- Do not apply finish to areas that will receive sealant.
- Ensure a means for drainage is provided at system termination at window head.
- Provide a back wrapped type joint with backer rod and sealant at system terminations to dissimilar materials, ensuring that a water tight seal is achieved (width per design).
- Prior to window and EPS
 installation, ensure water-resistive
 barrier is properly applied into the
 rough openings in accordance with
 LaHabra application guidelines
 and code requirements. Reference
 LaHabra Finestop published typical
 details for further information.
- Consult window and sealant manufacturers to verify window installation, detailing and to ensure no water leakage into the wall assembly.
- Reference Acceptable Sealants for Use with LaHabra Wall Systems Technical Bulletin for a list of sealants.


06 0524 (*NOTE: BY OTHERS)

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.



Pebbletex Adhered Mat CI Design

TYPICAL WINDOW JAMB (FLUSH)

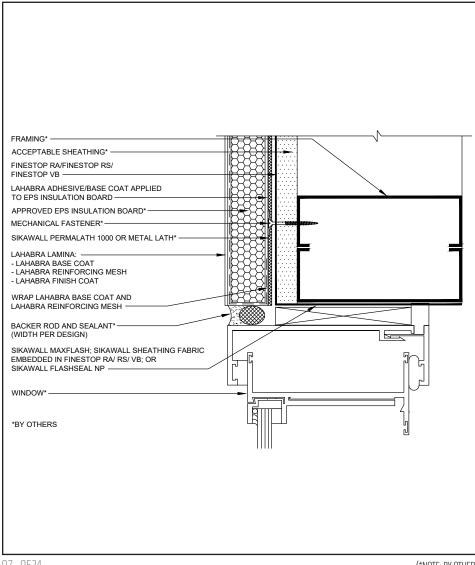

- All terminations must be fully encapsulated with mesh reinforced base coat. Extend reinforcing mesh a minimum of 2 ½" onto back of insulation board.
- Ensure the window flange is treated with a LaHabra transition treatment.
- LaHabra Transition Treatment
 Options: SikaWall MaxFlash,
 SikaWall Sheathing Fabric
 embedded in Finestop RA/RS/VB
 or SikaWall Flash Seal NP.
- Do not apply finish to areas that will receive sealant.
- Provide a back wrapped type joint with backer rod and sealant at system terminations to dissimilar materials, ensuring that a water tight seal is achieved (width per design).
- Prior to window and EPS installation, ensure water-resistive barrier is properly applied into the rough openings in accordance with LaHabra application guidelines and code requirements. Reference LaHabra Finestop published typical details.
- Consult window and sealant manufacturers to verify window installation, detailing and to ensure no water leakage into the wall assembly.


07 0524 (*NOTE: BY OTHERS)

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.





TYPICAL WINDOW JAMB (RECESSED)

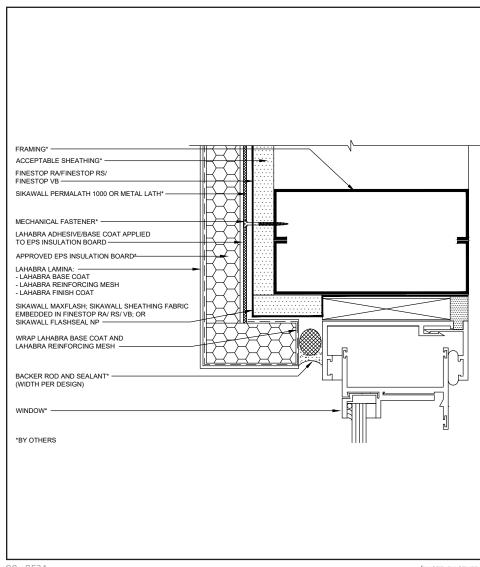

- All terminations must be fully encapsulated with mesh reinforced base coat. Extend reinforcing mesh a minimum of 2 ½" onto back of insulation board.
- Prior to window and EPS installation, ensure water-resistive barrier is properly applied into the rough openings in accordance with LaHabra application guidelines and code requirements. Reference LaHabra Finestop published typical details for further information.
- Do not apply finish to areas that will receive sealant.
- Provide a back wrapped type joint with backer rod and sealant at system terminations to dissimilar materials, ensuring that a water tight seal is achieved (width per design).
- LaHabra Transition Treatment
 Options: SikaWall MaxFlash,
 SikaWall Sheathing Fabric
 embedded in Finestop RA/RS/VB
 or SikaWall Flash Seal NP.
- Reference Acceptable Sealants for use with LaHabra Wall Systems Technical Bulletin for a list of sealants.
- Consult window and sealant manufacturers to verify window installation, detailing and to ensure no water leakage into the wall assembly.

08 0524 (*NOTE: BY OTHERS)


- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.





Pebbletex Adhered Mat CI Design

TYPICAL WINDOW SILL (FLUSH)

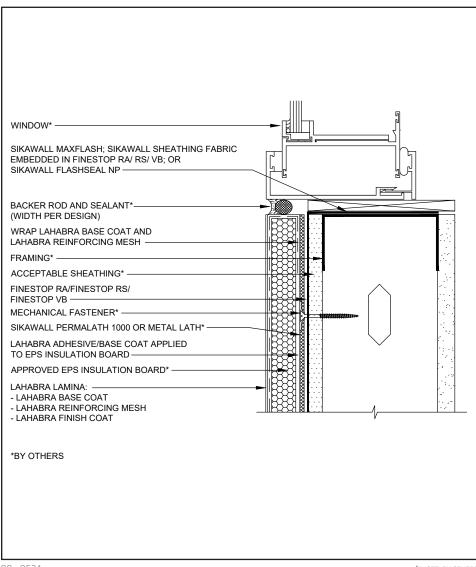

- All terminations must be fully encapsulated with mesh reinforced base coat. Extend reinforcing mesh a minimum of 2 ½" onto back of insulation board.
- Prior to window and EPS installation, ensure water-resistive barrier is properly applied into the rough openings in accordance with LaHabra application guidelines and code requirements. Reference LaHabra Finestop published typical details.
- Do not apply finish to areas that will receive sealant.
- Provide a back wrapped type joint with backer rod and sealant at system terminations to dissimilar materials, ensuring that a water tight seal is achieved (width per design).
- LaHabra Transition Treatment
 Options: SikaWall MaxFlash,
 SikaWall Sheathing Fabric
 embedded in Finestop RA/RS/VB
 or SikaWall Flash Seal NP.
- Reference Acceptable Sealants for use with LaHabra Wall Systems Technical Bulletin for a list of sealants.
- Consult window and sealant manufacturers to verify window installation, detailing and to ensure no water leakage into the wall assembly.


09 0524 (*NOTE: BY OTHERS)

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.



Pebbletex Adhered Mat CI Design

TYPICAL WINDOW SILL (RECESSED)

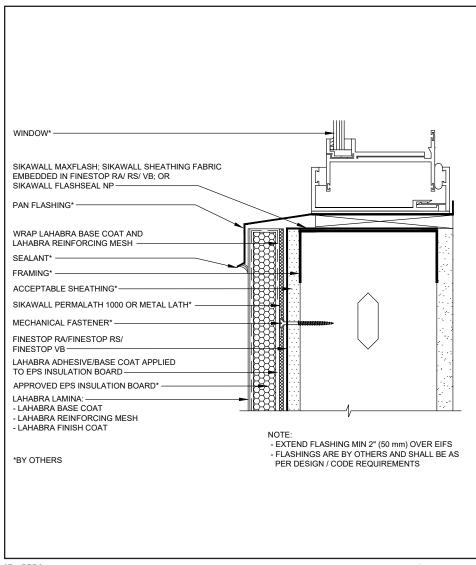

- All terminations must be fully encapsulated with mesh reinforced base coat. Extend reinforcing mesh a minimum of 2 ½" onto back of insulation board.
- Ensure water-resistive barrier is properly applied into the rough openings in accordance with application guidelines and code requirements prior to EPS insulation board application.
- Ensure that metal pan flashing extends onto the system a minimum of 2" (50 mm) down the face and that end dams are provided.
- LaHabra Transition Treatment
 Options: SikaWall MaxFlash,
 SikaWall Sheathing Fabric
 embedded in Finestop RA/RS/VB
 or SikaWall Flash Seal NP.
- Reference Acceptable Sealants for use with LaHabra Wall Systems Technical Bulletin for a list of sealants.
- Consult window and sealant manufacturers to verify window installation, detailing and to ensure no water leakage into the wall assembly.


10 0524 (*NOTE: BY OTHERS)

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.





TYPICAL ROOF EDGE FLASHING

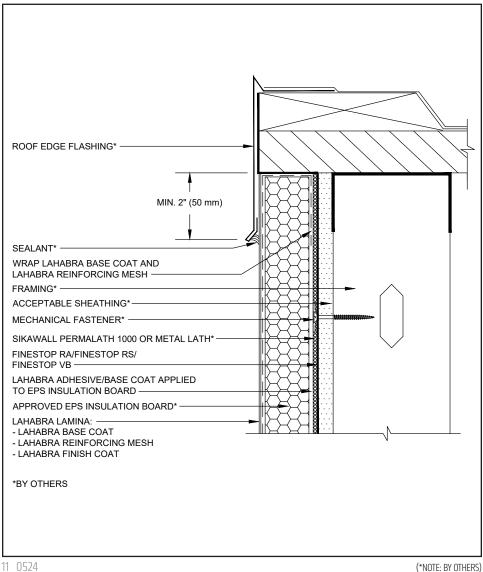


- · All terminations must be fully encapsulated with mesh reinforced base coat. Extend reinforcing mesh a minimum of 2 1/2" onto back of insulation board.
- Ensure that metal coping/flashing extends onto the system a minimum of 2" (50 mm) down the
- Extend Finestop RA/RS/VB or SikaWall MaxFlash onto bottom of blocking or provide alternate air seal at sheathing termination to blocking.
- Reference Acceptable Sealants for use with LaHabra Wall Systems Technical Bulletin for a list of sealants.

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.





TYPICAL METAL COPING

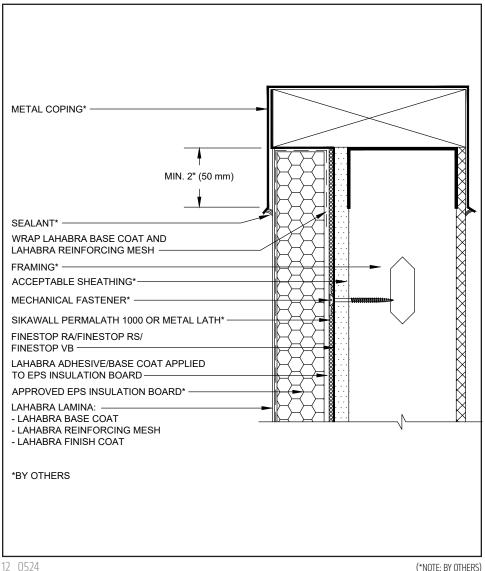

- · All terminations must be fully encapsulated with mesh reinforced base coat. Extend reinforcing mesh a minimum of 2 1/2" onto back of insulation board.
- Ensure that metal coping/ flashing extends onto the system a minimum of 2" (50 mm) down the
- Extend Finestop RA/RS/VB or SikaWall MaxFlash onto bottom of blocking or provide alternate air seal at sheathing termination to blocking.
- Reference Acceptable Sealants for use with LaHabra Wall Systems Technical Bulletin for a list of sealants.


(*NOTE: BY OTHERS)

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.



Pebbletex Adhered Mat CI Design

TYPICAL EPS PARAPET CAP

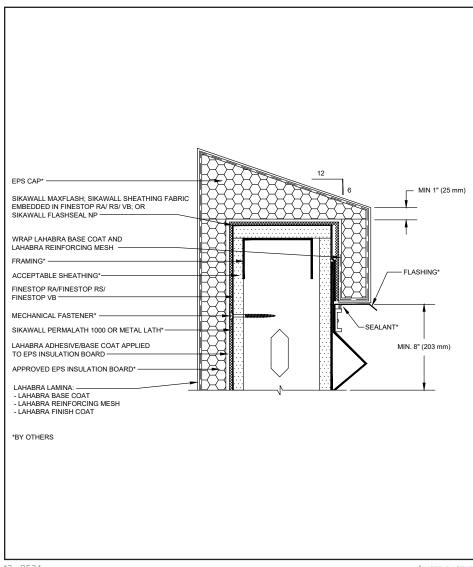

- All terminations must be fully encapsulated with mesh reinforced base coat. Pre-backwrapping is recommended at drainage terminations. Extend reinforcing mesh a minimum of 2 ½" onto back of insulation board.
- Provide a minimum 6:12 slope for all horizontal surfaces. LaHabra requires the use of a roofing system or metal cap flashing for sloped surfaces over 24" (610 mm).
- Additional layers of mesh reinforced base coat is recommended when sloped surfaces exceed 12" (305 mm).
- Ensure a means for drainage is provided at system termination.
- Terminate system a minimum of 8" (203 mm) above flat roof. Roofing material shall not extend above the flashing flange.
- Maintain a minimum 1" (25 mm) thick EPS insulation board.
- LaHabra Joint Treatment Options: SikaWall MaxFlash, SikaWall Sheathing Fabric embedded in Finestop RA/RS/VB or SikaWall Flash Seal NP.
- Reference Acceptable Sealants for use with LaHabra Wall Systems Technical Bulletin for a list of sealants.

13 0524 (*NOTE: BY OTHERS)


- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.







TYPICAL EXPANSION JOINT AT FLOOR LINE

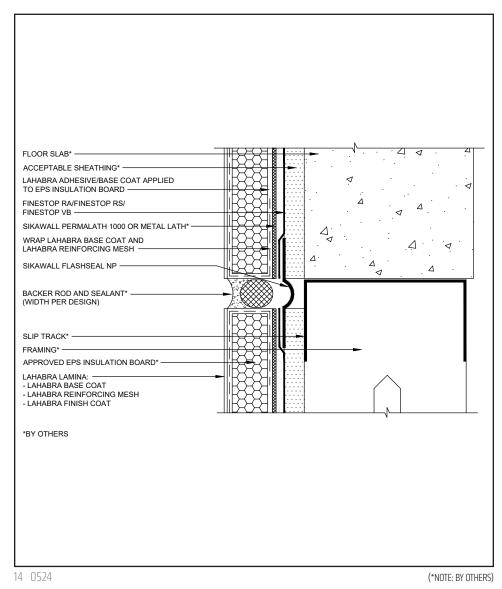

- All terminations must be fully encapsulated with mesh reinforced base coat. Pre-backwrapping is recommended at drainage terminations. Extend reinforcing mesh a minimum of 2 ½" onto back of insulation board.
- Do not apply finish to areas that will receive sealant.
- Provide sufficient slack in the SikaWall Flash Seal NP at expansion join to allow for movement.
- Typical locations for system expansion joints are at building expansion joints, at prefabricated panel joints, floor lines of wood frame construction or where slip tracks are used in steel frame construction, where substrates change and where structural movement is anticipated. It is the sole responsibility of the project design team, including the architect, engineer, etc., to ultimately determine specific expansion joint placement, width and design. Detail specific locations in construction drawings.
- It is recommended that a means for drainage is provided at every third floor. (See typical drainage at floorline detail).
- Ensure drainage plane is continuous and unobstructed at expansion ioint.
- Reference Acceptable Sealants for use with LaHabra Wall Systems Technical Bulletin for a list of sealants.

The details within are the latest recommendations and are represented in good faith by Sika Corporation US (hereinafter Sika). The details are subject to change without notice. Sika accepts no

- liability for the end use of the details. For conditions not shown, consult Sika for review of specific details.


 Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.







TYPICAL EXPANSION JOINT AT CHANGE IN SUBSTRATE

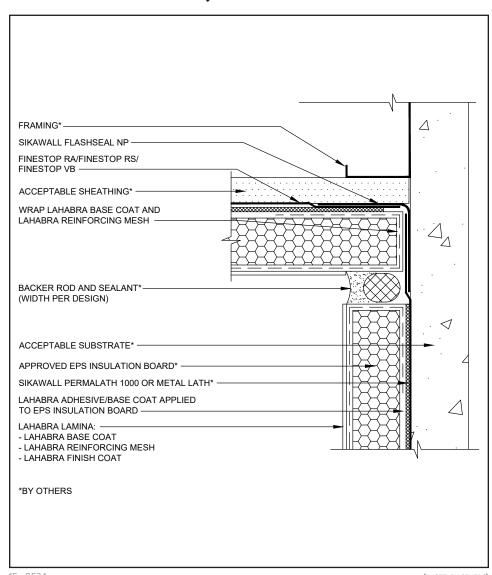

- All terminations must be fully encapsulated with mesh reinforced base coat. Extend reinforcing mesh a minimum of 2 ½" onto back of insulation board.
- Do not apply finish to areas that will receive sealant.
- Ensure drainage plane is continuous and unobstructed at expansion joint.
- Typical locations for system expansion joints are at building expansion joints, at prefabricated panel joints, floor lines of wood frame construction or where slip tracks are used in steel frame construction, where substrates change and where structural movement is anticipated. It is the sole responsibility of the project design team, including the architect, engineer, etc., to ultimately determine specific expansion joint placement, width and design. Detail specific locations in construction drawings.
- Provide sufficient slack in SikaWall Flash Seal NP at expansion joint to allow for movement.
- Reference Acceptable Sealants for use with LaHabra Wall Systems Technical Bulletin for a list of sealants.


15 0524 (*NOTE: BY OTHERS)

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.



Pebbletex Adhered Mat CI Design

TYPICAL SECTION AT FASCIA - SOFFIT

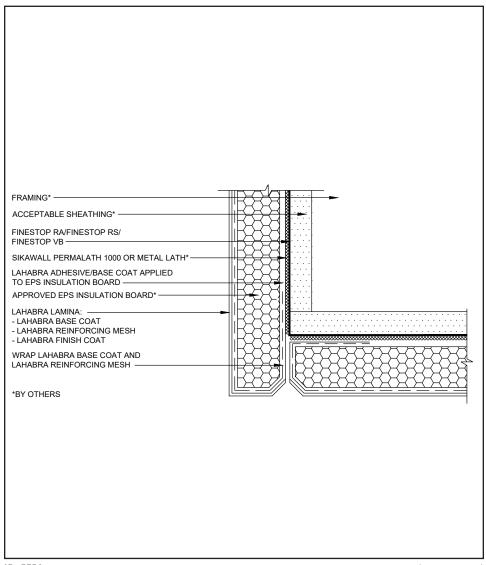

- All terminations must be fully encapsulated with mesh reinforced base coat. Pre-backwrap both the vertical and horizontal terminations. Extend reinforcing mesh a minimum of 2 ½" onto back of insulation board.
- Extend Finestop RA/RS/VB a minimum of 4" (100mm) onto soffit. If necessary for air barrier continuity Finestop RA/RS/VB can be applied over entire soffit.
- Ensure a means of drainage is provided at system termination at soffit/fascia transition.

16 0524 (*NOTE: BY OTHERS)


- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.







TYPICAL VERTICAL EXPANSION JOINT

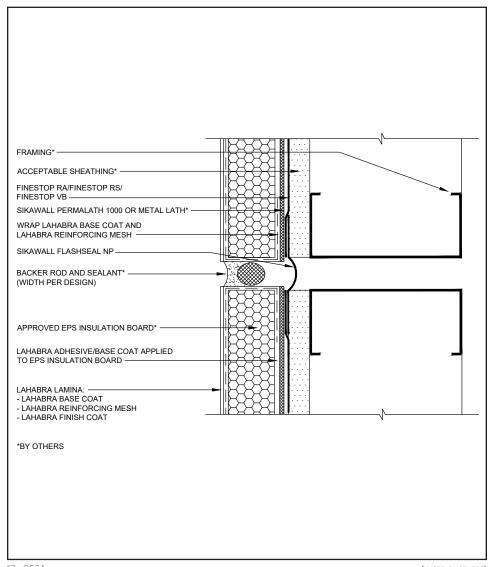

- All terminations must be fully encapsulated with mesh reinforced base coat. Extend reinforcing mesh a minimum of 2 ½" onto back of insulation board.
- Do not apply finish to areas that will receive sealant.
- Ensure drainage plane is continuous and unobstructed at expansion joint.
- Typical locations for system expansion joints are at building expansion joints, at prefabricated panel joints, floor lines of wood frame construction or where slip tracks are used in steel frame construction, where substrates change and where structural movement is anticipated. It is the sole responsibility of the project design team, including the architect, engineer, etc., to ultimately determine specific expansion joint placement, width and design. Detail specific locations in construction drawings
- Provide sufficient slack in SikaWall Flash Seal NP at expansion joint to allow for movement.
- Reference Acceptable Sealants for use with LaHabra Wall Systems Technical Bulletin for a list of sealants.


17 0524 (*NOTE: BY OTHERS)

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.



Pebbletex Adhered Mat CI Design

TYPICAL PIPE PENETRATION

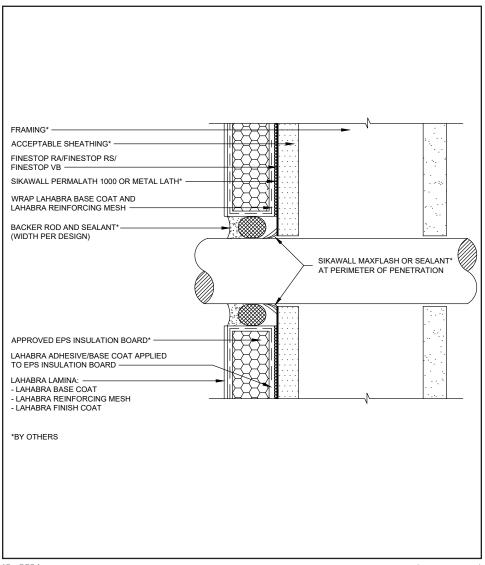

- · All terminations must be fully encapsulated with mesh reinforced basecoat. Pre-backwrap both the vertical and horizontal terminations. Extend reinforcing mesh a minimum of 2 1/2" onto back of insulation board.
- Ensure all penetrations into the system are properly sealed. Reference Acceptable Sealants to use with LaHabra Wall Systems Technical Bulletin for a list of sealants.
- · Provide continuous air seal around perimeter of penetration prior to EPS insulation board application. Reference Acceptable Sealants for use with Finestop RA/RS/ VB Technical Bulletin for a list of
- Do not apply finish to areas that will receive sealant.


18 0524 (*NOTE: BY OTHERS)

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.





TYPICAL CORNER MESH APPLICATION WITH STRONG 15 OR ULTRA HI 20

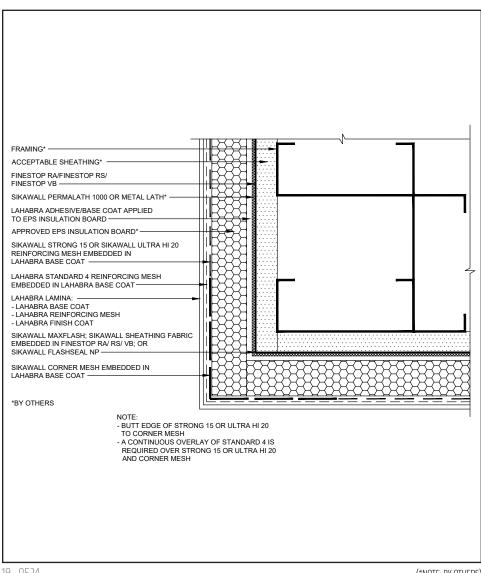

- Butt edges of SikaWall Strong 15 or Ultra HI 20 to SikaWall Corner Mesh.
- A continuous overlay of LaHabra Standard 4 is required over SikaWall Strong 15 or Ultra HI 20 and SikaWall Corner Mesh.


19 0524 (*NOTE: BY OTHERS)

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.



Pebbletex Adhered Mat CI Design

TYPICAL CORNER MESH APPLICATION WITH STANDARD 4, INTERMEDIATE 6 OR 12

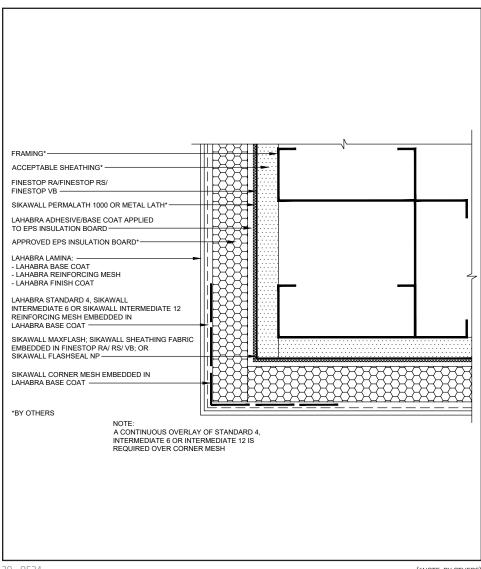

· Ensure Standard, SikaWall Intermediate 6 or SikaWall Intermediate 12 Reinforcing Mesh is lapped a minimum of 8" (203 mm) around corners.

20 0524 (*NOTE: BY OTHERS)

The details within are the latest recommendations and are represented in good faith by Sika Corporation US (hereinafter Sika). The details are subject to change without notice. Sika accepts no liability for the end use of the details. For conditions not shown, consult Sika for review of specific details.


- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.

Technical Service



Pebbletex Adhered Mat CI Design

TYPICAL LIGHT FIXTURE

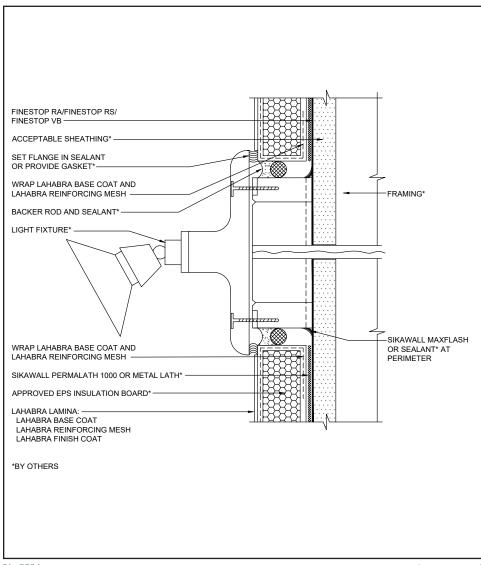

- · All terminations must be fully encapsulated with mesh reinforced base coat. Prebackwrap both the vertical and horizontal terminations. Extend reinforcing mesh a minimum of 2 1/2" onto back of insulation board.
- Ensure all penetrations into the system are properly sealed.
- Reference Acceptable Sealants to use with LaHabra Wall Systems Technical Bulletin for a list of sealants.
- · Provide continuous air seal around perimeter of penetration prior to EPS insulation board application. Reference Acceptable Sealants for use with Finestop RA/RS/ VB Technical Bulletin for a list of sealants.

21 0524 (*NOTE: BY OTHERS)


- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.







TYPICAL TERMINATION AT FOUNDATION

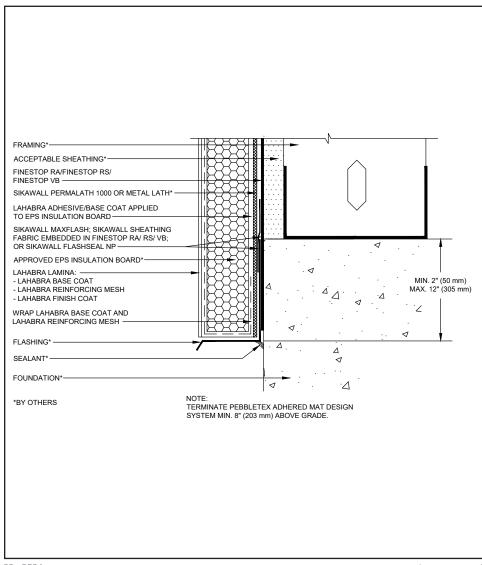

- All terminations must be fully encapsulated with mesh reinforced base coat. Prebackwrapping is recommended at drainage terminations. Extend reinforcing mesh a minimum of 2 ½" onto back of insulation board.
- Ensure a means for drainage is provided at system termination at foundation.
- Terminate system a minimum of 6" (152 mm) above grade.
- Extend system a minimum of 2" (50 mm) and a maximum of 12" (305 mm) at the sole plate foundation transition.
- Apply LaHabra Transition Treatment at transition from sheathing to concrete (behind flashing).
- LaHabra Transition Treatment
 Options: SikaWall MaxFlash,
 SikaWall Sheathing Fabric
 embedded in Finestop RA/RS/VB
 or SikaWall Flash Seal NP.


22 0524 (*NOTE: BY OTHERS)

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.





TYPICAL TERMINATION AT FOUNDATION (FLUSH)

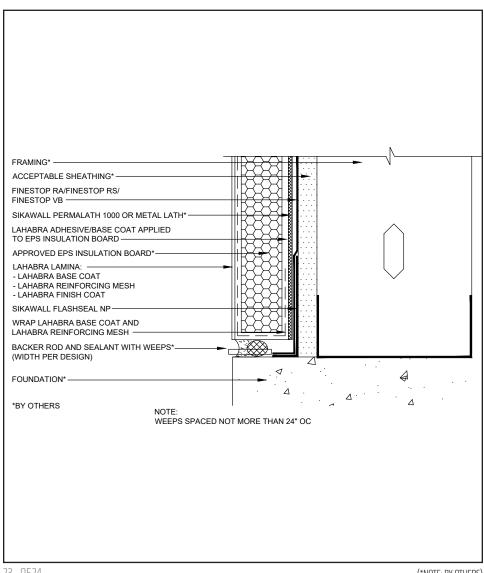

- · All terminations must be fully encapsulated with mesh reinforced base coat. Prebackwrapping is recommended at drainage terminations. Extend reinforcing mesh a minimum of 2 1/2" onto back of insulation board.
- · Ensure a means for drainage is provided at system termination at foundation.
- · Place weep tubes a maximum of 24" (610 mm) on center.
- Do not apply finish to areas that will receive sealant.
- Reference Acceptable Sealants for use with LaHabra Wall System Technical Bulletin for a list of sealants.


23 0524 (*NOTE: BY OTHERS)

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.





TYPICAL KICK-OUT FLASHING AT SLOPED ROOF

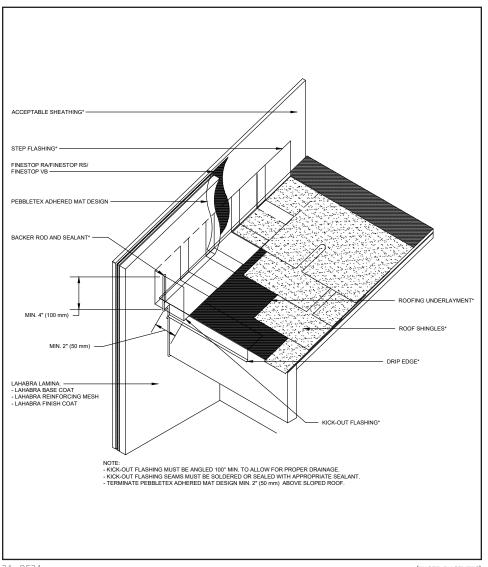

- All terminations must be fully encapsulated with mesh reinforced base coat. Prebackwrapping is recommended at drainage terminations. Extend reinforcing mesh a minimum of 2 ½" onto back of insulation board.
- Ensure a means for drainage is provided at system termination at roof.
- Terminate system a minimum of 2" (50 mm) above sloped roof.
- Ensure step flashing is a minimum of 2" (50 mm) behind system.
- Kick-out flashing shall be a minimum of 4" (102 mm) in height.
- Do not apply finish to areas that will receive sealant.
- LaHabra Transition Treatment
 Options: SikaWall MaxFlash,
 SikaWall Sheathing Fabric
 embedded in Finestop RA/RS/VB
 or SikaWall Flash Seal NP.
- Reference Acceptable Sealants for use with LaHabra Wall Systems Technical Bulletin for a list of sealants.

24 0524 (*NOTE: BY OTHERS)

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.





LIMITED WARRANTY NOTICE

Prior to each use of any product of Sika Corporation, its subsidiaries or affiliates ("SIKA"), the user must always read and follow the warnings and instructions on the product's most current product label, Product Data Sheet and Safety Data Sheet which are available at usa.sika.com/lahabra or by calling our Technical Service Department at +1 (800) 589-1336.

Nothing contained in any SIKA literature or materials relieves the user of the obligation to read and follow the warnings and instructions for each SIKA product as set forth in the current product label, Product Data Sheet and Safety Data Sheet prior to use of the SIKA product.

SIKA warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within the product's shelf life. User determines suitability of product for intended use and assumes all risks. User's and/ or buyer's sole remedy shall be limited to the purchase price or replacement of this product exclusive of any labor costs. NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS. Sale of SIKA products are subject to the Terms and Conditions of Sale which are available at usa.sika.com.

For the most current version of this literature, please visit our website at usa.sika.com/lahabra.

Sika Corporation 201 Polito Avenue Lyndhurst, NJ 07071 USA Customer Service +1 (800) 433-9517 Technical Service +1 (800) 589-1336 usa.sika.com/lahabra

