



FLOOR COVERING SYSTEMS

Sika[®] MB

MOISTURE MITIGATION - SUBSTRATE CONSOLIDATION - ADHESION PROMOTION
FOR COMMERCIAL AND RESIDENTIAL FLOORING



BUILDING TRUST










Sika® MB

Superior Moisture Protection

Sika® MB is a 2-component, solvent-free, super low-viscosity, epoxy primer for use under all flooring products, including wood, carpet, vinyl, LVT, self-leveling underlayments, floating floors, and other flooring systems that require protection from sub-floor moisture. Based on its perm rating, it is classified by NWFA as a vapor barrier.

WHERE IT CAN BE USED

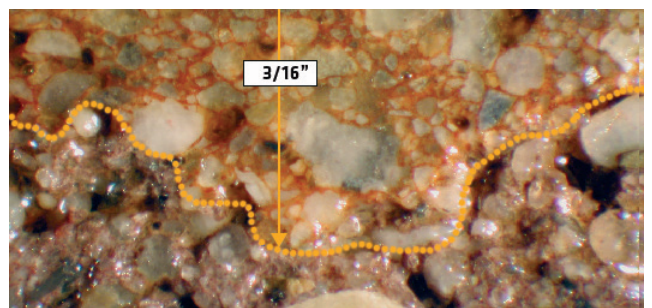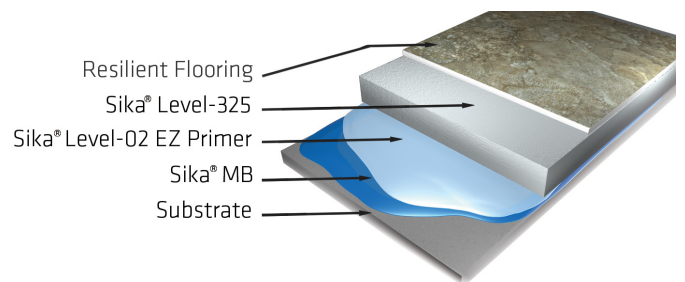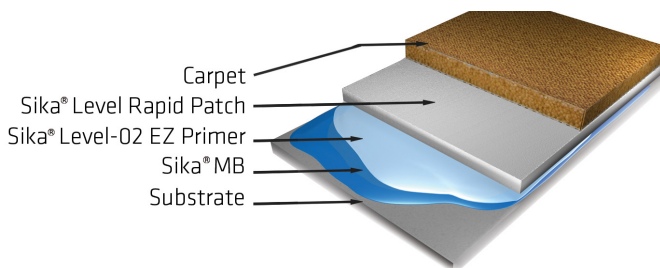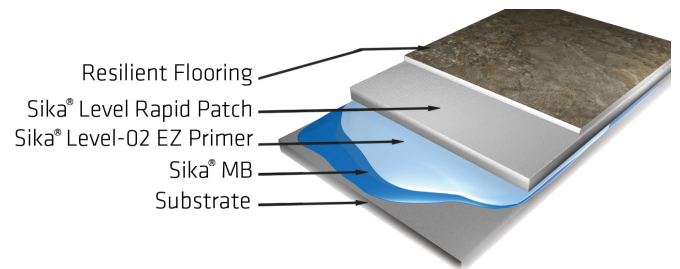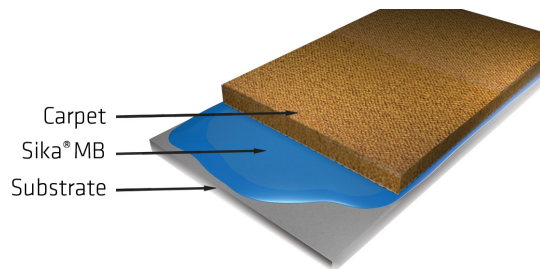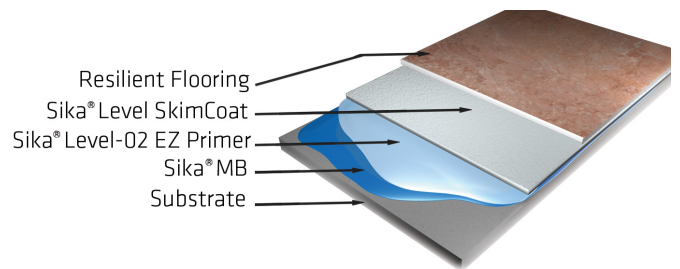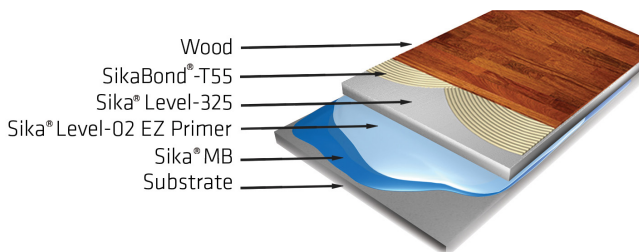

Sika® MB's low viscosity allows it to penetrate into porous substrates, as seen in this cross-section.

THREE USES IN ONE APPLICATION



MOISTURE PROTECTION

WHERE TO USE

- Substrates with moisture up to 100% RH, 25 lbs calcium chloride and under 6% Tramex
- Under any flooring system that requires protection from moisture

BENEFITS

- Powerful moisture protection: extremely low perm rating
- Easy to visually confirm full coverage during installation
- Simple to use



SUBSTRATE CONSOLIDATION

WHERE TO USE

- On weak or delicate substrates
- On old substrates
- Gypsum-based subfloors

BENEFITS

- Low viscosity formula penetrates and fortifies substrate
- Protect against substrate failure of weak substrates




ADHESION PROMOTION

WHERE TO USE

- Over old adhesive and residues
- Encapsulating asphalt based substrates including cutback
- Over old substrates

BENEFITS

- Avoid extensive removal of old adhesive residues
- Reduce risk of bond failures due to subfloor preparation

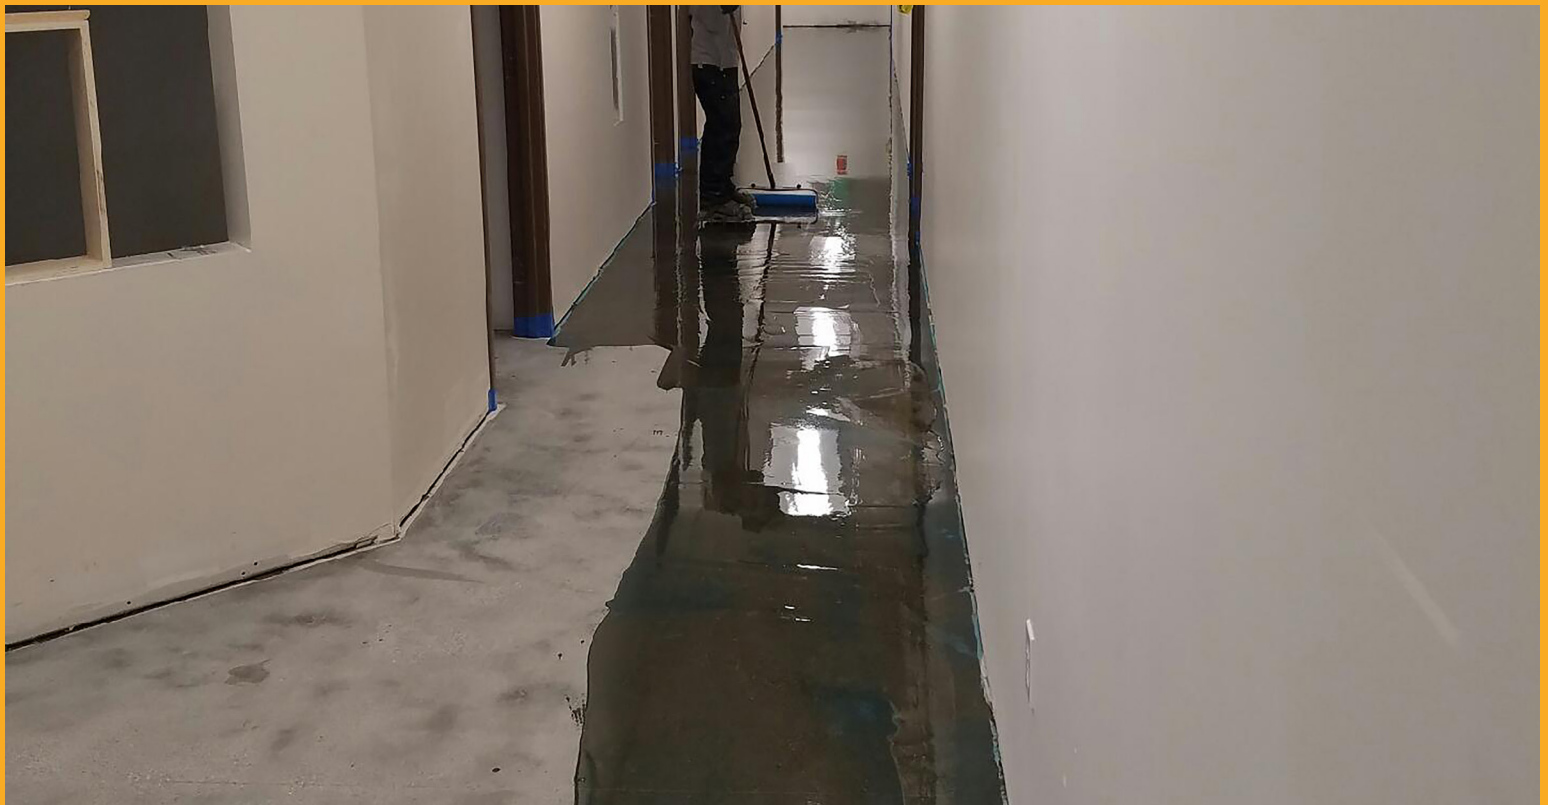

FOR MORE INTERIOR FINISHING INFORMATION:

Contact Sika: Phone: 1-800-933-SIKA (Nationwide), Website: www.usa.sika.com

All sales of Sika products are subject to Sika's current Terms and Conditions of Sale available at www.sikausa.com or by calling 201-933-8800. Prior to each use of any Sika product, the user must always read and follow the warnings and instructions on the product's most current Product Data Sheet, product label and Material Safety Data Sheet, which are available at www.sikausa.com or by calling Technical Services at 1-800-933-7452. Nothing contained in any Sika materials relieves the user of the obligation to read and follow the warnings and instructions for each Sika product as set forth in the current Product Data Sheet, product label and Material Safety Data Sheet prior to product use.

The sale of all Sika products are subject to the following Limited Warranty:

LIMITED MATERIAL WARRANTY

SIKA warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within shelf life. User determines suitability of product for intended use and assumes all risks. Buyer's sole remedy shall be limited to the purchase price or replacement of product exclusive of labor or cost of labor.

NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.



Our most current General Sales Conditions shall apply. Please consult the Product Data Sheets prior to any use and processing.

SIKA CORPORATION

201 Polito Avenue
Lyndhurst, NJ 07071
Phone: 201-933-8800
Fax: 201-933-6225

SIKA CANADA INC.

601 Delmar Avenue
Pointe Claire
Quebec H9R 4A9
Phone: 514-697-2610
Fax: 514-694-2792

SIKA MEXICANA S.A. DE C.V.

Carretera Libre Celaya Km. 8.5
Fracc. Industrial Balvanera
Corregidora, Queretaro
C.P. 76920
Phone: 52 442 2385800
Fax: 52 442 2250537

BUILDING TRUST

