



SikaBond®-T55

WOOD FLOOR ADHESIVE FOR SOLID WOOD FLOORING

- Elongation of 400%
- Bond up to 3/4" solid planks up to 8 inches wide with no length limitations
- Bond engineered planks up to 14 inches wide with no length limitations
- Excellent green grab with a cured tenacious bond
- Permanently elastic - allows planks to expand and contract without damage to the adhesive

Packaging available
5 gal. Pail (18.93L)



BUILDING TRUST



SikaBond®-T55

WOOD FLOOR ADHESIVE FOR SOLID WOOD FLOORING

WHERE TO USE

SikaBond®-T55 may be used for solid and engineered wood floors (strips, longstrips, planks, panels, boards) mosaic parquet, industrial parquet, wood paving (residential) as well as chip boards can be bonded and bonds ceramic tiles to concrete, mortar, and old existing tiles.


TYPICAL DATA (Material and curing conditions @ 73°F (23°C) and 50% R.H.)

Shelf Life	12 months from date of production if stored in undamaged original sealed containers
Chemistry	1-component polyurethane, moisture curing
Coverage	Adhesive only (P5 Trowel): approx 50 sqft. per gal.
Skimming/Laying Time	45 – 60 minutes at 73°F (23°C) and 50% RH
Traffic Time	Light Traffic at 4 hours Floor can be sanded at 12 hours
Tensile Strength	217 psi at 73°F (23°C)
Elongation at Break	~400 % cured at 73°F (23°C) and 50% RH
VOC	83 g/L (measured per SCAQMD rule 1168)

FEATURES AND BENEFITS

- 400% Elongation
- Formulated for easy trowelability, preventing arm strain
- Fast curing - unfinished wood flooring can be sanded after 12 hours of cure time
- Crack bridging
- Suitable for most common types of wood floors
- Perfect for problematic woods such as beech and bamboo
- Suitable for bonding wood floors directly onto old ceramic tiles
- Suitable for in-floor radiant heat installation
- Footfall-sound-dampening adhesive
- Contains no water
- Bonds solid wood flooring up to 8 inches wide and engineered planks up to 14 inches wide directly to concrete with no length limitations
- Eliminate sleepers and plywood over concrete and gypsum substrates
- Permanently elastic – allows planks to expand and contract without damage to the adhesive or substrate

NOTE: Always refer to Current Product data Sheet and SDS for detailed performance specifications prior to use.

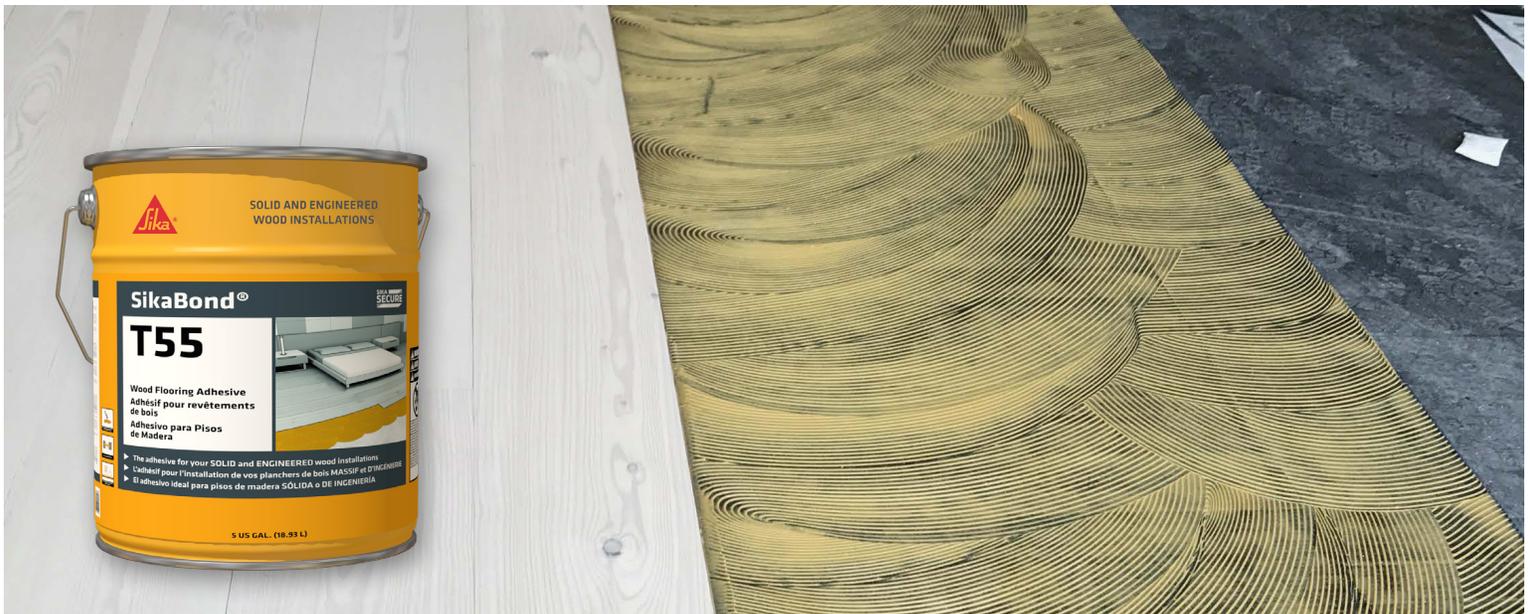

FOR MORE INFORMATION:

Contact Sika: Phone 800.933.SIKA(7452) Website: www.usa.sika.com

Sika Corporation
201 Polito Avenue
Lyndhurst, NJ 07071
Phone: 201-933-8800
Fax: 201-933-6225



BUILDING TRUST

