

SikaQuick® Concrete Resurfacer

HIGH PERFORMANCE, FAST SETTING, CEMENT-BASED RESURFACER

- Easy to use, one-component
- Variable water ratios for different use: resurfacing/sloping
- Interior and exterior use
- Feather edge application

Available in 35 lbs bag





SikaQuick® Concrete Resurfacer

HIGH PERFORMANCE, FAST SETTING, CEMENT BASED RESURFACER

PRODUCT DESCRIPTION


SikaQuick Concrete Resurfacer is a polymer-modified, one-component, cementitious resurfacing compound. Designed for use on exterior concrete substrates such as sidewalks, walkways, patios, parking garages, and residential driveways. Easily applied by smoothing trowel or rubber squeegee.

BENEFITS

- Easy to use, one-component
- Variable water ratios for different uses: resurfacing/sloping
- Interior and exterior use
- Feather edge application
- High abrasion resistance
- Foot traffic in 2-3 hours
- Waiting Time / Overcoating: 16 24 hour
- Freeze/thaw resistant
- 28 days compressive strength (ASTM C-109)-3,500 psi (24.1 MPa)

APPLICATIONS

- To be used on concrete, above and below grade
- Use on horizontal surfaces, both interior and exterior
- Use as a protective coating to reduce the effect of deicing salt on concrete.
- Use as a coating over newly repaired concrete to provide a uniform appearance
- Use on concrete and masonry substrates to improve abrasion resistance to foot traffic and tire traffic

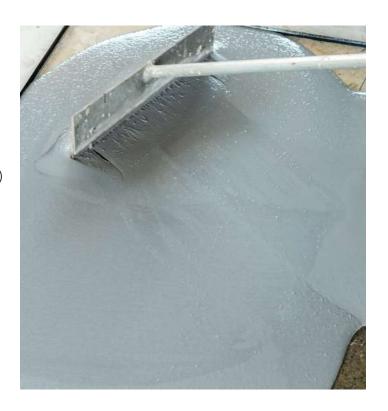

PRODUCT INFORMATION

Appearance / Color	Cement-gray
	12 months from date of manufacture if stored properly in original, unopened and undamaged, sealed packaging.
Storage Conditions	Store in a cool, dry area. Do not leave bags exposed to the sun.

Note: Advice on specific applications is available from the Technical Service Department of Sika Construction Products Division.

FOR MORE INFORMATION:

Contact Sika: Phone 800 933 7452 Website: usa.sika.com

Sika Corporation

201 Polito Avenue Lyndhurst, NJ 07071 Phone: 201-933-8800 Fax: 201-933-6225

