LaHabra®



INSULATED MASONRY VENEER SYSTEMS

FULLY INTEGRATED, CODE-COMPLIANT WALL SYSTEMS WITH UNLIMITED AESTHETIC OPTIONS



BUILDING TRUST

INSULATED MASONRY VENEER SYSTEMS

SUPERIOR PERFORMANCE WITH UNLIMITED AESTHETIC POSSIBILITIES

As design trends evolve toward multi-cladding with stone and brick; architects, designers, building owners and other construction professionals are seeking alternatives that can help them achieve the required performance and multi-cladding aesthetic. LaHabra has designed the Insulated Masonry Veneer System to specifically meet the challenges of multi-cladding construction, creating the look and feel your clients want, with code compliance and building performance you need, at a cost that facilitates project success.



Arlington, Texas



Charlotte, North Carolina

REDUCED COMPLEXITY

Achieve a multi-cladding aesthetic from masonry veneer to metal, wood and so much more over a continuously insulated (CI) wall system from one manufacturer. Eliminate extra work detailing complex transitions between multiple claddings and manufacturers.

MASONRY VENEER

Featuring SikaWall®-1000 MaxGrip Veneer Adhesive, the highstrength mortar, is used to adhere up to 15 psf of natural and manufactured stone, ceramic tile, and thin brick veneer without the need to use mechanical fasteners or Z-girts, saving time and money, and eliminating the risk of mortar failure.

ENERGY EFFICIENCY

Achieve the desired masonry veneer aesthetic without compromising the continuous exterior insulation. Seamless integration of continuous insulation, weather barrier and drainage ensures optimum heat, air and moisture control. SikaWall®-1000 MaxGrip Veneer Adhesive is strong enough to adhere masonry veneer without the use of mechanical fasteners, keeping these critical control layers intact, which eliminates thermal bridging and reduces the risk of moisture intrusion.

JOBSITE PRODUCTIVITY

Take the headache out of coordinating the sequence of trades and products from multiple manufacturers. The Insulated Masonry Veneer System can be installed by a single applicator, helping you complete the job on time and within budget.

BUILD WITH CONFIDENCE

Fully tested and evaluated to ensure components work as a code-compliant system, the Insulated Masonry Veneer System is listed by ICC Evaluation Service in ESR-2186 evaluation report and complies with NFPA 285 standard.

NON-INSULATED MASONRY **VENEER SYSTEMS**

THE POWER OF CHOICE AT YOUR FINGERTIPS

LaHabra's comprehensive portfolio of Masonry Veneer Systems empowers you to select the system that best meets your building enclosure and exterior finish objectives. SikaWall®-1000 MaxGrip Veneer Adhesive is compatible with a variety of substrates, including cement board, stucco, concrete, CMU, and over LaHabra air/water resistive barriers.



FINESCREEN 1000 WITH MAXGRIP VENEER ADHESIVE


A highly impact and puncture resistant, water-drainage wall system incorporating a cement board core, reinforced base coat and MaxGrip Veneer Mortar.



Acceptable Substrate*


Finestop-R/-RS/-VB

- Grade D Paper (Bond Breaker)*
- SikaWall Joint Treatment: Sheathing Fabric, MaxFlash or Flash Seal NP
- SikaWall Permalath 1000 or Metal Plaster Base¹
- SikaWall Stucco Base
- Mechanical Fastener*
- Skim Coat of SikaWall MaxGrip Veneer Adhesive
- SikaWall MaxGrip Veneer Adhesive
- Adhered Veneer*
- *Bv Others

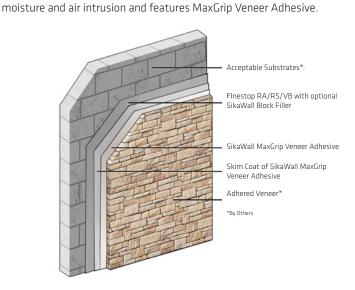

incorporates a Finestop RA, RS and VB air and water-resistive barrier to

provide a premium level of protection to the sheathing and cavity against



LAHABRA FASTERWALL WITH DRAIN MAT AND **MAXGRIP VENEER ADHESIVE**


An impact and puncture resistant, cement plaster stucco system with enhanced water management. It incorporates a Finestop RA, RS and VB air and water-resistive barrier to provide a premium level of protection to the sheathing and cavity against moisture and air intrusion and MaxGrip Veneer Mortar.

CONCRETE MASONRY UNIT WITH MAXGRIP VENEER ADHESIVE

Concrete Masonry Unit with Finestop RA, RS and VB fluid-applied air/ water-resistive barrier and MaxGrip Veneer Adhesive.

PEBBLETEX CI-DCA WITH MAXGRIP VENEER ADHESIVE

Innovative, high-performance wall system with unlimited aesthetic options

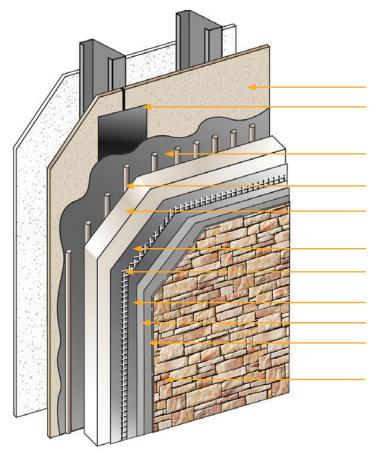

DOCUMENT	DESCRIPTION
ICC ESR-2186	Complies with 2018 and 2015 IBC and IRC
ASTM E2568 / AC 235	Complies with requirements
ASTM E119	Does not detract from fire rating of base wall
NFPA 285 and 268	Acceptable on non-combustible construction
ICC-ESR 2986 (Finestop-RA/-RS)	Air/water-resistive barrier*
Air Barrier Association of America recognized (Finestop-RA/-RS/-VB)	Can be used on projects where ABAA recognized air barriers are specified

A fully integrated wall system with continuous insulation, air/water-resistive barrier and drainage, featuring SikaWall-1000 MaxGrip Veneer Adhesive.

- 1. Acceptable substrate^{†‡}
- 2. SikaWall Joint Treatment: Sheathing Fabric, MaxFlash, or Flash Seal NP
- Finestop-RA/-RS/-VB Fluid-applied air and water-resistive barrier provides effective air and moisture protection
- LaHabra Adhesive Drainage plane for effective moisture control
- Approved EPS Insulation Board‡ Continuous exterior insulation delivers optimal energy efficiency
- 6. LaHabra Base Coat
- SikaWall-9000 Intermediate 12 Reinforcing Mesh Structural wall support impact resistance
- 8. LaHabra Base Coat
- 9. Skim coat of SikaWall-1000 MaxGrip Veneer Adhesive
- SikaWall-1000 MaxGrip Veneer Adhesive High strength, setting bed mortar, used to adhere a variety of masonry veneers
- Adhered Veneer‡
 Compatible with a variety of masonry veneers, from stone to tile and thin brick

*Finestop-RA/-RS/-VB can be used behind all claddings where more than one wall system is specified, creating one continuous AWRB system. This is appropriate whenever LaHabra Pebbletex CI-DCA with SikaWall-1000 MaxGrip Veneer Mortar is used with other cladding types on a multi-clad building.

[†]Acceptable substrates:

PermaBase® Cement Board and other cement boards conforming with ASTM C1325 (Type A - exterior); poured concrete/unit masonry; ASTM C1177 type sheathings, including Weather Defense™ Platinum sheathing, GreenClass® sheathing, eXP™ sheathing, GlasRoc® sheathing, Securock™ glass-mat sheathing, and DensGlass® exterior sheathing; DensElement (sheathing only), gypsum sheathing (ASTM C79/C1396); Exposure I or exterior plywood (Grade C/D or better); or Exposure I OSB; Huber Zip (sheathing only).

[‡]By other manufacturer

SIKAWALL[®]-1000 MAXGRIP VENEER ADHESIVE MAXIMUM STRENGTH AND ADHESION

High-strength and specially formulated, SikaWall-1000 MaxGrip Veneer Adhesive is a setting bed mortar used to adhere up to 15 PSF of natural and manufactured stone^{*}, ceramic tile[†], and thin brick veneer[‡] to a broad range of substrates. No mechanical fasteners required.

- Complies with ANSI 118.4, the American National Standard Specifications for Modified Dry-Set Cement Mortar, sets a minimum standard for modified standard mortars
- Complies with ANSI 118.15, the American National Standard Specifications for Modified Dry-Set Cement Mortar, the most stringent freeze/thaw testing for polymer-modified mortars
- Freeze-thaw stable bond showing resistance to deterioration after repeated temperature cycling per ASTM C-666 (modified using full IVS composite in place of concrete beam)
- Fully tested per ASTM C109, Standard Test Method for Compressive Strength of Hydraulic Cement Mortars



IMVS Seismic and Racking Study



IMVS Short-Term Deflection Study



For complete application recommendations on the use of SikaWall®-1000 MaxGrip Veneer Adhesive please review the Product Data Sheet.

*Manufactured stone must comply with applicable requirements of ICC-ES Acceptance Criteria AC51 or ASTM C1670.

†Tile shall comply with applicable requirements of the Tile Council of North America and/or ANSI A137.1.

‡Thin brick veneer shall comply with applicable requirements of ASTM C 1088 or per the Brick Industry Association.

LOOKING FOR SOME INSPIRATION?











Our most current General Sales Conditions shall apply. Please consult the Data Sheet prior to any use and processing © 2024 Sika Corporation, 45011966 rev 12/2024

Sika Corporation

201 Polito Avenue Lyndhurst, NJ 07071 USA Customer Service (800) 433-9517 Technical Service (800) 243-6739 usa.sika.com/lahabra



BUILDING TRUST