

BUILDING TRUST

SHOWER RECEPTORS


Wood or Metal Studs, Coated Glass Mat, Water-Resistant Gypsum Backer Board Walls, Mortar Bed Floor, Waterproof Membrane, Ceramic Tile

SikaTile: ST-B420 TCNA: B420

*See TCNA for complete uses and limitations.

DATE:

PROJECT NAME:

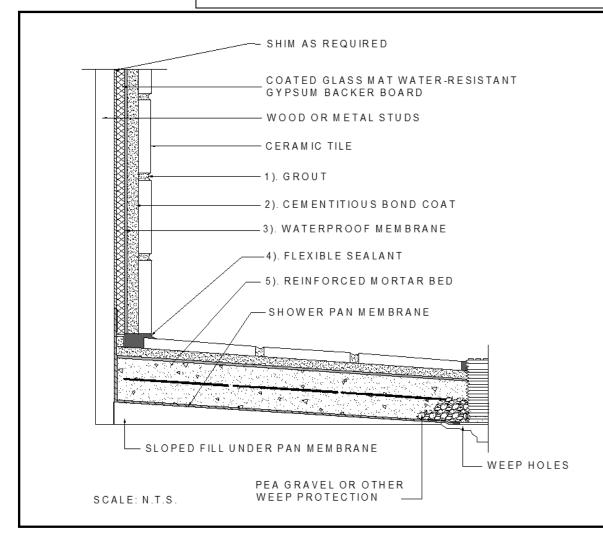

Reference Standards

Minimum Product Performance

Cementitious Grout: ANSI A118.6
Epoxy Grout: ANSI A118.3
Latex-Cement Bond Coat: ANSI A118.4
Bonded Waterproof Membrane: ANSI A118.10

Environmental Classification:

Residential (Res) 1, 2, 3Commercial (Com) 1, 2

Sika Tile Product Assembly

- 1. Grout Options:
 - a. SikaTile®- 825 Secure Grout
 - b. SikaTile®-800 Sanded Grout
 - c. SikaTile®-800 Unsanded Grout
 - d. SikaTile®-825 Epoxy Grout
 - e. SikaTile®-850 Ultima Grout

2. Cementitious Bond Coat Options:

- a. SikaTile®-400 LHT Pro Set (White/Gray)
- b. SikaTile®-450 LHT Secure Set (White/Gray)
- c. SikaTile®-475 LHT Premium Set (White)
- d. SikaTile®-500 LHT Lite (White/Gray)

3. Waterproofing Membrane:

a. SikaTile®-100 Moisture Guard

4. Flexible Sealant:

a. SikaTile® N-Plus

5. Reinforced Mortar Bed:

a. ANSI A108.1A

The preceding specifications are provided by Sika Corporation as a guide for informational purposes only and are not intended to replace sound engineering practice and judgment and should not be relied upon for that purpose. Sika Corporation makes no warranty of any kind, either express or implied, as to the accuracy, completeness, or the contents of these guide specifications. Sika Corporation assumes no liability with respect to the provision of such specifications. SIKA SHALL NOT BE RESPONSIBLE UNDER ANY LEGAL THEORY TO ANY DIRDET OR NOTHING PROME TO RECORD CONSEQUENTIAL DAMAGES OF ANY KIND ARISING FROM HE USE OF THESE GUIDE SPECIFICATIONS. The specifier, architect, engineer or design professional or contractor for a particular project bears the sole responsibility for the design of the system and for the preparation and approval of the specifications and determining their suitability for a particular project or application. Prior to each use of any Sika product, the user must always read and follow the warnings and instructions on the product's most current Technical Data Sheet, product label and Material Safety Data Sheet which are available at www.usa.sika.com or by calling 800-933-7452. Nothing contained in any Sika materials relieves the user of the obligation to read and follow the warnings and instructions for each Sika product as set forth in the current Technical Data Sheet, product label and Material Safety Data Sheet prior to product use. All products and services provided by Sika Corporation are subject to its terms and conditions of sale available at www.usa.sika.com.

.