

## SYSTEM DATA SHEET

# PAREX® Armourwall Stucco

## Cement Plaster Stucco System

### PRODUCT DESCRIPTION


PAREX® Armourwall Stucco is a non-structural stucco wall system in which the cement plaster component is applied to a thickness of 9.5mm to 22mm (3/8" to 7/8") over a variety of approved substrates.

### USES

New or retrofit residential, institutional and commercial low-rise construction such as hotels, hospitals, retail centers, schools, multi-family apartments, condominiums, and government facilities.

### CHARACTERISTICS / ADVANTAGES

- Can be used on non-combustible construction types
- For use with fire resistance rated walls
- Impact resistance

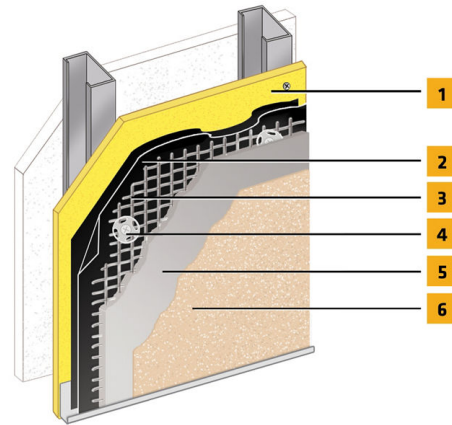

1. Acceptable Sheathing\*
2. Water-Resistive Barrier\*
3. SikaWall Permalath 1000 or Metal Plaster Base\*
4. Mechanical Fastener\*
5. SikaWall Stucco Base
6. Parex Finish

\*By Others

## SYSTEM INFORMATION

### Compatibility

Material substitution will adversely affect system performance and will void all warranty coverage unless approved in writing by Sika Facades Technical Service Team.

## APPLICATION INFORMATION

### Substrates

#### Acceptable Substrates:

Glass mat Gypsum Sheathing  
Gypsum Sheathing  
Exposure 1 OSB  
Cement Fiber Sheathing  
Concrete & Concrete Masonry  
CDX Plywood

## BASIS OF PRODUCT DATA

Results may differ based upon statistical variations depending upon mixing methods and equipment, temperature, application methods, test methods, actual site conditions and curing conditions.

## LIMITATIONS

- **Users must read the most current Product Data Sheets for each system component before using any products and follow all application instructions and cautions.**
- Maximum allowable deflection L/360, based on stud properties only.
- The design wind load shall not exceed the system's allowable wind load as stated in applicable code reports.
- Details shall conform with Sika Facades recommendations and shall be consistent with the project requirements.
- Control joints and trim accessories required. Control joint placement is required in the Sentry Stucco Wall System every 144 ft<sup>2</sup> (13.4m<sup>2</sup>) per ASTM C1063.
- Consult the framing and sheathing manufacturer for design and application considerations.
- Expansion joints are required in the system where they exist in the substrate, where the system adjoins dissimilar construction, at changes in substrates and at floor lines in multilevel wood frame construction.
- System shall terminate at expansion joints.
- Sealant joints shall be detailed and installed per sealant manufacturer's recommendations.
- A minimum 6:12 slope is required on all horizontal surfaces greater than 1" (25mm).
- Backer rod, sealant and flashing are required at door and window openings.
- Susceptibility to efflorescence can be reduced by using SikaWall Stucco Prime.
- Not for use below grade.
- Base coat thickness of this system might result in planar irregularities in finished wall appearance.
- Do not cut aesthetic grooves into the wall surface.
- Contact Sika Facades' Technical Service Department at

1-800-226-2424 for additional information.

## ENVIRONMENTAL, HEALTH AND SAFETY

For further information and advice regarding transportation, handling, storage and disposal of chemical products, user should refer to the actual Safety Data Sheets containing physical, environmental, toxicological and other safety related data. User must read the current actual Safety Data Sheets before using any products. In case of an emergency, call CHEMTREC at 1-800-424-9300, International 703-527-3887.

## LEGAL DISCLAIMER

- **KEEP CONTAINER TIGHTLY CLOSED**
- **KEEP OUT OF REACH OF CHILDREN**
- **NOT FOR INTERNAL CONSUMPTION**
- **FOR INDUSTRIAL USE ONLY**
- **FOR PROFESSIONAL USE ONLY**

Prior to each use of any product of Sika Corporation, its subsidiaries or affiliates ("SIKA"), the user must always read and follow the warnings and instructions on the product's most current product label, Product Data Sheet and Safety Data Sheet which are available at [usa.sika.com](http://usa.sika.com) or by calling SIKA's Technical Service Department at 1-800-933-7452. Nothing contained in any SIKA literature or materials relieves the user of the obligation to read and follow the warnings and instructions for each SIKA product as set forth in the current product label, Product Data Sheet and Safety Data Sheet prior to use of the SIKA product.

SIKA warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within the product's shelf life. User determines suitability of product for intended use and assumes all risks. User's and/or buyer's sole remedy shall be limited to the purchase price or replacement of this product exclusive of any labor costs.

**NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.**

Sale of SIKA products are subject to the Terms and Conditions of Sale which are available at <https://usa.sika.com/en/group/SikaCorp/termsandconditions.html> or by calling 1-800-933-7452.

SIKA warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within the product's shelf life. User determines suitability of product for intended use and assumes all risks. User's and/or buyer's sole remedy shall be limited to the purchase price or replacement of this product exclusive of any labor costs. NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS. Sale of SIKA products are subject to the Terms and Conditions of Sale which are available at [usa.sika.com](https://usa.sika.com).

**Sika Corporation**

201 Polito Avenue  
Lyndhurst, NJ 07071  
Phone: +1-800-933-7452  
Fax: +1-201-933-6225  
[usa.sika.com](https://usa.sika.com)



**System Data Sheet**

PAREX® Armourwall Stucco  
May 2025, Version 01.01  
021830950000242575

PAREXArmourwallStucco-en-US-(05-2025)-1-1.pdf

