

## SYSTEM DATA SHEET

# Sikafloor® DecoDur Granite FX

DECORATIVE , SMOOTH, GRANITE EFFECT FLOOR SYSTEM ENGINEERED WITH  
SIKAFLOOR-218 DF @ 93 - 118 MILS (2.3 -3.0MM)

## PRODUCT DESCRIPTION

Sikafloor® DecoDur Granite FX is a decorative epoxy flooring system using Sikafloor 218 DF; a two part, low odor, low viscosity epoxy resin, and Sikafloor DecoDur aggregate. The system is self leveling and highly UV resistant making it an ideal system for almost any application requiring long term durability and premium appearance. Sikafloor® DecoDur Granite FX is typically installed @ 93 - 118 mils (2.3 - 3.0 mm).

## USES

Sikafloor® DecoDur Granite FX may only be used by experienced professionals.

- Cafeterias and restaurants
- Education facilities
- Retail stores
- Laboratories and clinics
- Healthcare facilities
- Lobbies and public spaces


## CHARACTERISTICS / ADVANTAGES

- Stylish and decorative
- Low VOC
- Smooth matte or finely textured finish
- Excellent UV, mechanical and abrasion resistance
- Very low maintenance
- Durable, seamless, sanitary

# SYSTEM INFORMATION

## System Structure

Sikafloor® DecoDur Granite FX ~ 93 - 118 mils (2.3 - 3.0 mm)

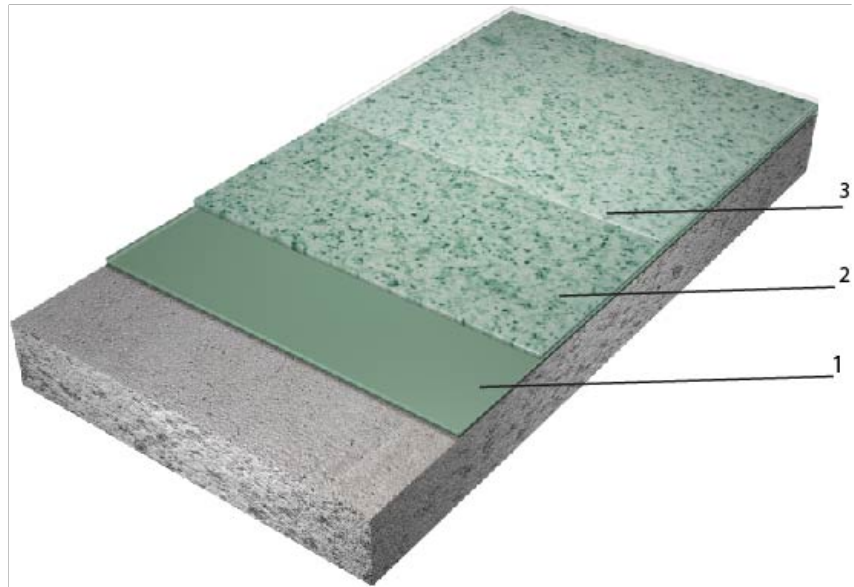

Description	Products	Thickness mils
1. Primer/Base Coat	Sikafloor®-264 Sikafloor®-218 DF	8 - 10
2. Body Coat	+ Sika DecoDur Aggregate	80 - 100
3. Top Coat	Sikafloor®-304 W NA	5 - 8
<b>Options</b>		
Primers	Sikafloor®-1610 Sikafloor®-165 FS	8 - 10 8 - 10
Top Coat	Sikafloor®-315 N*	3 - 5

\* Sikafloor-315 N clear would be an optional top coat for increased chemical and wear resistance

Color	Available in various standard color blends, refer to Sikafloor® DecoDur Granite color guide.
Nominal thickness	93 - 118 mils (2.3 - 3.0 mm)
Minimum thickness	93 mils (2.3 mm)
Volatile organic compound (VOC) content	Please refer to the individual Product Data Sheet

## TECHNICAL INFORMATION

Shore D Hardness	80	ASTM D2240 at 73°F (23°C) and 50% R.H
Abrasion Resistance	76 mg loss (CS-17/1000 rotations/1000g)	ASTM D4060 at 73°F (23°C) and 50% R.H
Indentation	1.3 %	MII-PRF -24613
Compressive Strength	7,426 psi (51.2 Mpa)	ASTM C579 at 73°F (23°C) and 50% R.H
Tensile Strength	5,728 psi (39.4 MPa)	ASTM D638 at 73°F (23°C) and 50% R.H
Flexural Strength	9,384 psi (64.7 MPa)	ASTM D790 at 73°F (23°C) and 50% R.H
Tensile Adhesion Strength	>400 psi (2.7 MPa)	ASTM D4151 at 73°F (23°C) and 50% R.H
Elongation at Break	11%	ASTM D638 at 73°F (23°C) and 50% R.H
Chemical Resistance	Contact Sika Technical Service for specific information.	
Coefficient of Friction	>0.51	ANSI 326.3 at 73°F (23°C) and 50% R.H

## APPLICATION INFORMATION

### Coverage

Description	Products	Approximates Sq.Ft./kit
1. Primer	Sikafloor®-264	900@8mils
2. Body Coat	Sikafloor®-218 DF +	160@80mils
	Sika DecoDur Aggregate	2 bags per 4.5 gallon kit
3. Top Coat	Sikafloor®-304 W NA	595@5mils
<b>Options</b>		
Primers	Sikafloor®-1610	900@8mils
	Sikafloor®-165 FS	1,000@8mils
Top Coat	Sikafloor®-315 N	2,400@4mils

Ambient Air Temperature Minimum/Maximum 50/85 °F (10/30 °C)

Substrate Temperature Minimum/Maximum 50/85 °F (10/30 °C)

## PRODUCT INFORMATION

Packaging	Please refer to the individual Product Data Sheet
Shelf Life	Please refer to the individual Product Data Sheet
Storage Conditions	Please refer to the individual Product Data Sheet

## BASIS OF PRODUCT DATA

Results may differ based upon statistical variations depending upon mixing methods and equipment, temperature, application methods, test methods, actual site conditions and curing conditions.

## LIMITATIONS

Please refer to the individual Product Data Sheet

## ENVIRONMENTAL, HEALTH AND SAFETY

For further information and advice regarding transportation, handling, storage and disposal of chemical products, user should refer to the actual Safety Data Sheets containing physical, environmental, toxicological and other safety related data. User must read the current actual Safety Data Sheets before using any products. In case of an emergency, call CHEMTREC at 1-800-424-9300, International 703-527-3887.

## SUBSTRATE PREPARATION

Concrete surfaces must be clean and sound. Remove all dust, dirt, existing paint films, efflorescence, exudates, laitance, form oils, hydraulic or fuel oils, brake fluid, grease, fungus, mildew, biological residues or any other contaminants which may prohibit a good bond.

Prepare the surface by any appropriate mechanical means, in order to achieve a profile equivalent to ICRI - CSP 3-6. The compressive strength of the concrete substrate should be at least 3,625 psi (25 MPa) at 28 days and a minimum of 218 psi (1.5 MPa) in tension at the time of application.

Repairs to cementitious substrates, filling of blowholes, leveling of irregularities, etc. should be carried out using an appropriate Sika profiling mortar. Contact Sika Technical Service for a recommendation.

## Primer/Base Coat

Priming for concrete substrate is required. Prime with either Sikafloor®- 264, Sikafloor®- 1610 or Sikafloor®- 165 FS. Allow the primer to cure (varies with temperature and humidity) until tack free before applying subsequent membrane coats. Ensure that the primer is pore-free, pinhole-free and provides uniform and complete coverage over the entire substrate.

Please refer to the individual most current and respective Product Data Sheet for specific and detailed information.

## MIXING

Please refer to the individual Product Data Sheet

## APPLICATION

Please refer to the individual Product Data Sheet

## OTHER RESTRICTIONS

See Legal Disclaimer.

## LEGAL DISCLAIMER

- KEEP CONTAINER TIGHTLY CLOSED
- KEEP OUT OF REACH OF CHILDREN
- NOT FOR INTERNAL CONSUMPTION
- FOR INDUSTRIAL USE ONLY
- FOR PROFESSIONAL USE ONLY

Prior to each use of any product of Sika Corporation, its subsidiaries or affiliates ("SIKA"), the user must always read and follow the warnings and instructions on the product's most current product label, Product Data Sheet and Safety Data Sheet which are available at [usa.sika.com](http://usa.sika.com) or by calling SIKA's Technical Service Department at 1-800-933-7452. Nothing contained in any SIKA literature or materials relieves the user of the obligation to read and follow the warnings and instructions for each SIKA product as set forth in the current product label, Product Data Sheet and Safety Data Sheet prior to use of the SIKA product.

SIKA warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within the product's shelf life. User determines suitability of product for intended use and assumes all risks. User's and/or buyer's sole remedy shall be limited to the purchase price or replacement of this product exclusive of any labor costs. **NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.**

Sale of SIKA products are subject to the Terms and Conditions of Sale which are available at <https://usa.sika.com/en/group/SikaCorp/termsandconditions.html> or by calling 1-800-933-7452.

### Sika Corporation

201 Polito Avenue  
Lyndhurst, NJ 07071  
Phone: +1-800-933-7452  
Fax: +1-201-933-6225  
[usa.sika.com](http://usa.sika.com)

### Sika Mexicana S.A. de C.V.

Carretera Libre Celaya Km. 8.5  
Fracc. Industrial Balvanera  
Corregidora, Queretaro  
C.P. 76920  
Phone: 52 442 2385800  
Fax: 52 442 2250537



### System Data Sheet

Sikafloor® DecoDur Granite FX  
September 2021, Version 01.04  
020811900000000172

SikafloorDecoDurGraniteFX-en-US-(09-2021)-1-4.pdf

