

SikaFlow® 648


HIGH STRENGTH, HIGH FLOW EPOXY GROUT

SIKAFLOW 648 IS THE PREMIER EPOXY RESIN-BASED PRECISION GROUT with carefully balanced physical properties used to secure critical equipment for proper alignment and transmission of static and dynamic loads.

FEATURES

- High Compressive Strength and Effective Bearing Area
- Excellent resistance to
 - Vibration and rotational torque
 - Creep
 - Chemical attack
 - Elevated service temperatures
- Formulated for easy installation
 - Excellent flow characteristics
 - Suitable for pouring or pumping
 - Low dust generation
 - Soap and water cleanup

SikaFlow 648 is available in all regions of the world, supported by trained Sika sales and technical personnel on every continent.

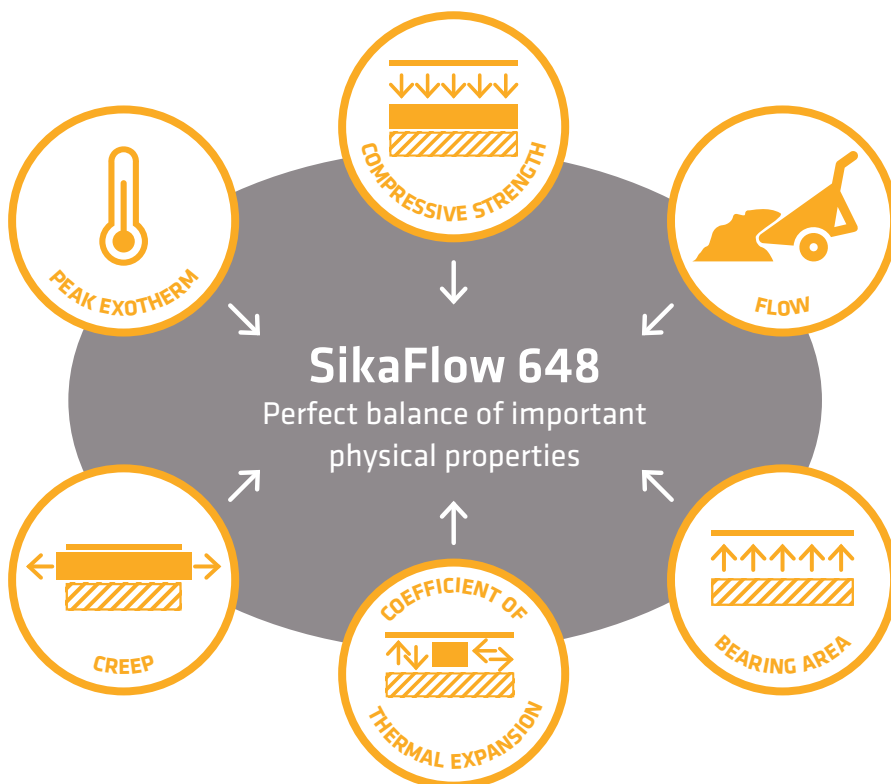

Please do not hesitate to contact us
for more specific information!
usa.sika.com 1(800) 433-9517

SELECT TECHNICAL DATA

Compressive Strength, ASTM C 579, Method B Ultimate Compressive Strength, psi (MPa)


Fill Ratio	7 Day Ambient	Post Cured*
Four Bag Mix	14,500 (100)	16,000 (110)
Three Bag Mix	14,000 (96)	15,000 (103)

*Cured 24 hours at room temperature, post cured 16 hours at 140 °F, and conditioned 24 hours at test temperature.

Cure Rate/Compressive Strength, psi (MPa), when cured at: (four bag mix)

Time	50 °F (10 °C)	73 °F (23 °C)	95 °F (35 °C)
16 hours	-	7,500 (52)	8,500 (59)
1 Day	1,400 (10)	9,000 (62)	13,500 (93)
2 Days	9,000 (62)	12,500 (86)	14,000 (96)
3 Days	12,000 (83)	13,500 (93)	14,500 (100)
4 Days	13,500 (93)	14,500 (100)	15,000 (103)

Peak Exotherm

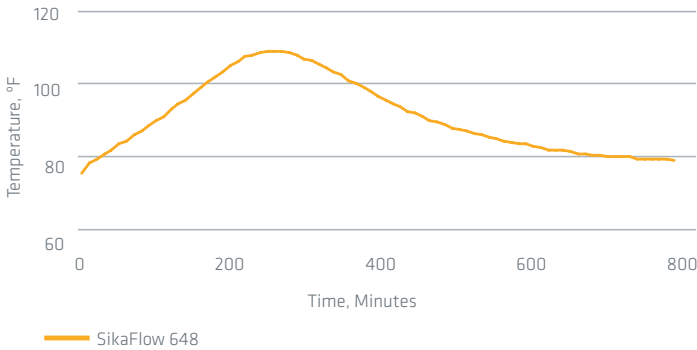

Flow Times and Bearing Area, ASTM C1339 (four bag mix)

Depth of pour	Back of Box	Full Plate Contact	Bearing Area
1" Clearance	11 Minutes	13 Minutes	High (> 85 %)
2" Clearance	4 Minutes 50 Seconds	5 Minutes	High (> 85 %)

Coefficient of Thermal Expansion, ASTM C 531 73 - 210 °F (23 - 99 °C), in /in / °F (cm/cm / °C)



Four Bag Mix	1.8×10^{-5} (3.22×10^{-5})
Three Bag Mix	2.0×10^{-5} (3.6×10^{-5})

Shrinkage, ASTM C 531, unrestrained; linear, %

Four Bag Mix	0.014
Three Bag Mix	0.031

Creep, ASTM C 1181, in/in 600 psi, 140 °F (4.1 MPa, 60°C) @ 28 Days

Four Bag Mix	4.2×10^{-3}
Three Bag Mix	4.9×10^{-3}

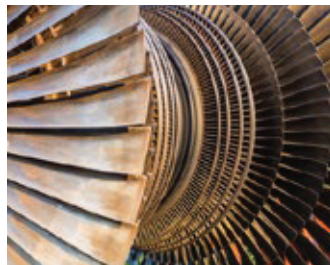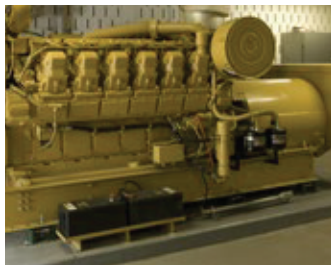

Sika Corporation

201 Polito Avenue
Lyndhurst, NJ 07071 USA

Customer Service (800) 433-9517

Technical Service (800) 243-6739

usa.sika.com

© 2024 Sika Corporation, 1030762 rev 02/2024



Our most current General Sales Conditions shall apply.

Please consult the Data Sheet prior to any use and processing