

Sika Waterbar® FB-125

A New Solution for Construction Joint
Waterproofing of Basements




- Sika Waterbar® FB-125, roll length 164 ft, width 5 inch



- Sika® Greenstreak® PVC Waterstop standard profile to seal expansion joints

ACCESSORIES



- SikaProof® Tape A+ N adhesive strip for overlap jointing



- SikaFlex 1a



- Hydrotite CJ-1020-2K and Leakmaster

KNOW-HOW FROM SITE TO SHELF



Sika Waterbar® FB-125 FLEXIBLE BONDED WATERSTOP FOR CONSTRUCTION JOINTS



FOR MORE
JOINT
WATERPROOFING
INFORMATION

Sika Corporation
3400 Tree Court Industrial Blvd.
St. Louis, MO 63122
Phone: 1.800.325.9504

Our most current General Sales Conditions shall apply.
Please consult the most current local Product Data Sheet prior to any use.

© 2024 Sika. 073298.5 rev. 07/2025

BUILDING TRUST



Sika Waterbar® FB-125

INTERNAL FLEXIBLE BONDED WATERSTOP FOR CONSTRUCTION JOINTS IN WATERTIGHT CONCRETE CONSTRUCTIONS


ASSEMBLY

Simple and fast assembly options are available.

- Simple jointing by adhering with SikaProof® Tape A+ N



- Welding by hot-air gun is also applicable

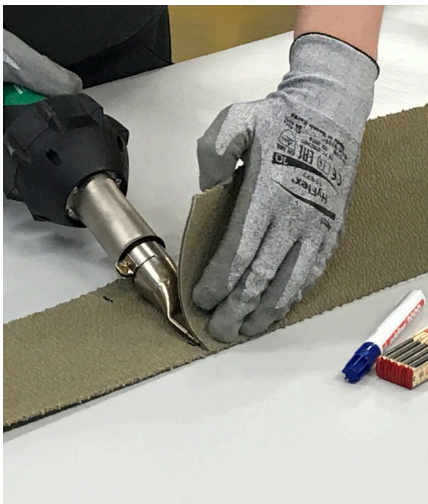

YOUR BENEFITS

Sika Waterbar® FB-125 is the efficient, reliable and easy joint sealing solution for your basement waterproofing project.

HIGH PERFORMANCE, RELIABLE Durable SOLUTION

- No lateral water underflow
- Robust and durable
- High mechanical properties such as flexibility

YOUR QUALITY

LOWER RISK FOR LEAKAGES

EASY, FAST APPLICATION AND HANDLING

- Minimal number of joints, due to long rolls
- Easy jointing, by taping or welding, no extra tools
- High flexibility and lightweight

YOUR TIME

TIME SAVING

NO EXTRA DESIGN AND PREPARATION WORK REQUIRED

- No extra rebar recess or kicker required
- No extra designed details needed
- No obstructions during concrete casting

YOUR MONEY

COST SAVING

USE

For construction joints in watertight concrete structures. Can be combined easily with Sika® Greenstreak® PVC Waterstop for expansion joints.

The section on the right through the construction joint slab to wall shows the minimum embedding depth of 1 inch.

