FLOOR COVERING INSTALLATION MATERIALS

MOISTURE MITIGATION, SUBFLOOR PREPARATION, FLOORING ADHESIVES

PRODUCT GUIDE

SIKA SECURE

BUILDING TRUST

RELIABLE SYSTEMS MAKE A DIFFERENCE

Time and again it has been proven that the quality of subfloor and the choice of the correct adhesive make all the difference. System selection dictates the end result. Projects easily become something to forget or something to showcase and make you proud! Sika® Secure System plays a critical role in the final appearance and service life of your installed floor.

Sika® is a world renowned market leader in cement, epoxy and polyurethane chemistry, rising above the competition. System solutions offered by Sika® include moisture mitigation, primers, patch, repair, self-leveling underlayment, wood and resilient flooring adhesives that have been proven in both refurbishment and new construction projects in commercial and residential construction.

SIKA® ICON CLASSIFICATION LEGEND

To help choose the best solution for your projects, Sika® has developed a classification system to define the performance and the features of each product. These icons help differ between products regarding curing speed, strength, special features and much more. Use this icon legend throughout this brochure for a better understanding of the products Sika® has to offer.

Depth

Flow

Speed

Strength

Smoothness

Porous Substrates

Non-porous Substrates

Moisture Barrier

MVER* Tolerable

Baseline

Interior & Exterior

Ramp/Slope

Elongation

Sound Reduction

***MVER: Moisture Vapor Emissions Rate**

SIKA® SECURE SYSTEM

The Sika® Secure System has been developed to deliver the best Sika® solution to meet project needs and provide answers to everyday challenges. From moisture mitigation to underlayments, from patching and skimming, to various flooring adhesives, Sika® provides a total system package.

SikaBond® Wood Floor Adhesives
- SikaBond®-T21
- SikaBond®-T55
- SikaBond®-T25
- SikaBond®-T17
- SikaBond®-T100
- SikaBond®-7700
- SikaBond® T-85
- SikaBond®-6200
- Sika® AcouBond® System

SikaBond® Resilient Floor Adhesives
- SikaBond®-6100
- SikaBond®-6000
- SikaBond®-5900
- SikaBond®-5700

SikaLevel® Primers
- SikaLevel®-02 EZ Primer (For non-porous substrates)
- SikaLevel®-01 Primer Plus (For porous substrates)

Sika® Moisture Barrier
- Sika® MB
- Sika® MB EZ Rapid

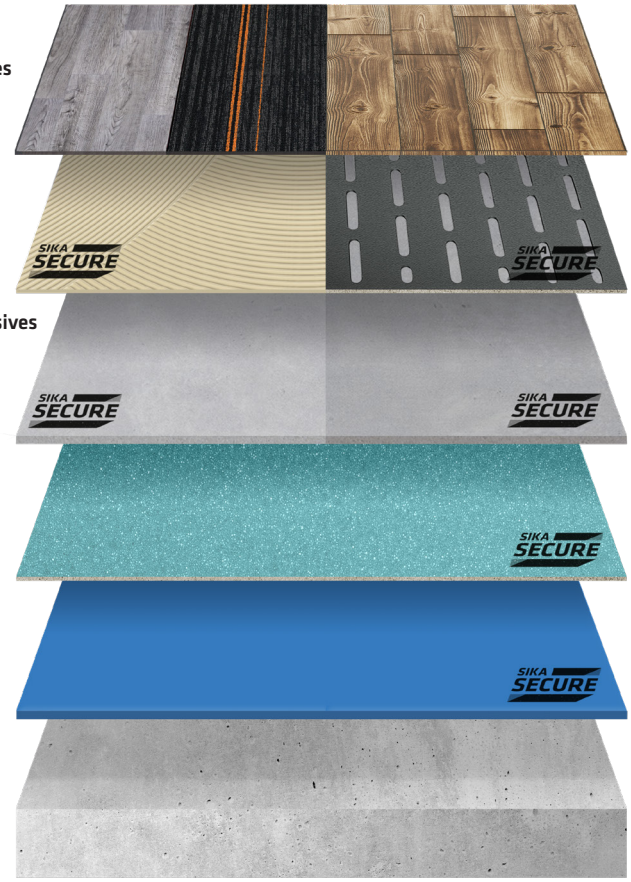

Floor Coverings
- Hardwood Flooring
- Resilient Flooring
- Cork
- Vinyl
- Carpet
- Linoleum

SikaLevel® Underlayments
- SikaLevel®-325
- SikaLevel®-225
- SikaLevel®-125

SikaLevel® SkimCoat and Patch
- SikaLevel® SkimCoat
- SikaLevel®-025 Patch

Substrate
- Concrete
- Gypsum
- Quarry Tile
- Vinyl Tile
- Adhesive Residues
- Terrazzo
- Radiant Heat

Sika® Secure System Examples

Sika® Secure Standard

Floor Covering

SikaBond® Adhesives

SikaLevel®-325

SikaLevel®-02 EZ Primer

Sika® MB

Substrate

For standard turnaround: 2 days

Sika® Secure Rapid

Floor Covering

SikaBond® Adhesives

SikaLevel®-025 Patch

SikaLevel®-02 EZ Primer

Sika® MB EZ Rapid

Substrate

For rapid turnaround: < 1 day

NOTES

SIKA® MOISTURE BARRIERS

Sika® MB and Sika® MB EZ Rapid are solvent-free, low-viscosity moisture barriers for use under ALL flooring products, including wood, carpet, vinyl, LVT, self-leveling underlayments, floating floors, and other flooring systems that require protection from subfloor moisture.

Sika® MB

Moisture barrier, substrate consolidator and adhesion promoter two-component epoxy

- Water Vapor Permeability: 0.06
- Reduction in adhesive consumption
- Cures in 8 hours at 73°F

Tools: Nap roller **Color:** Blue

Packaging: 2.64 US. gal. pail

Coverage per pail:
- Moisture barrier: 250 - 300 sq.ft.
- Adhesion promoter or substrate consolidator: 400 - 450 sq.ft

Moisture Limitations:
- 100% RH, #25 CC, 6% Tramex



Sika® MB EZ Rapid

One-component, rapid-drying, polyurethane resin, moisture mitigation system and substrate solidifier

- 1 hour dry time
- Excellent adhesion promoter
- Low viscosity
- Compatible with SikaBond®-910 Construction Adhesive for glue-assist applications

Tools: Nap roller **Color:** Blue

Coverage:
- 1 Coat: 1000 sqft per jug - 400 sqft per gallon
- 2 Coat: 500 sqft per jug - 200 sqft per gallon

Packaging: 2.5 US. gal. pail

Moisture Limitations:
- 1 Coat: 93% RH, #12 CC
- 2 Coats: 98% RH, #18 CC



MOISTURE PROTECTION

WHERE TO USE
- Under any flooring system that requires protection from moisture

SUBSTRATE CONSOLIDATION

WHERE TO USE
- On weak or delicate substrates
- On old substrates
- Gypsum-based subfloors

ADHESION PROMOTION

WHERE TO USE
- Over old adhesive and residues
- Encapsulating asphalt based substrates including cutback
- Over old substrates

NOTES

SIKALEVEL® PRIMERS

SikaLevel® primers can be used on a wide range of substrates before the application of Sika® self-leveling cementitious products. These primers can reduce the absorbency of the substrates and improve the adhesion between the underlayment and the substrate.

SikaLevel®-01 Primer Plus

Primer for porous substrates. Reduces absorbency of the substrate

- Broom applied
- Reduces pinholes
- 10 minute dry time on concrete
- Can be diluted with water

Color: White
Tools: Broom or brush

Coverage: 700-1000 sq.ft. dilution 1:3
Packaging: 1 US. gal. jug

Porous Substrates

SikaLevel®-02 EZ Primer

Primer for non-porous substrates. Provides optimum adhesion on tight substrates

- Nap roller applied
- Good skid resistant properties
- Short waiting time
- No dilution required

Color: Mint
Tools: Nap roller

Coverage: 325 - 500 sq.ft.
Packaging: 1 US. gal. pail

Non-Porous Substrates

SikaLevel®-01 Primer Plus

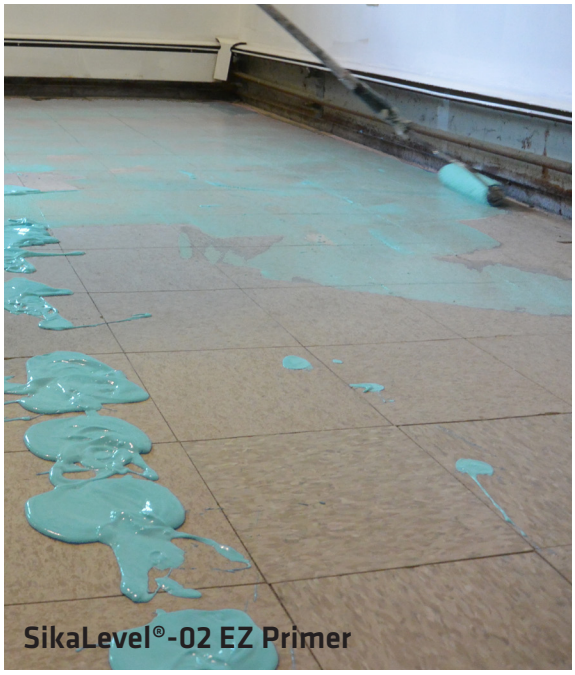
SikaLevel®-02 EZ Primer

NOTES

REPROFILING PATCH AND SKIMCOAT

SikaLevel® SkimCoat and SikaLevel®-025 Patch are fast-setting, polymer-modified, cement-based compounds that repair and re-profile concrete interior subfloors while providing a smooth finish prior to the installation of a floor covering. Sika® Latex R is a general purpose admixture which will produce polymer-modified concrete and mortar, as well as a bonding grout when mixed with sand and portland cement.

SikaLevel®-025 Patch

Rapid Setting, Polymer Modified, Cement-based Patching Compound

- For patching and leveling from 1/16" to 1/2"
- Foot traffic in 30 to 60 minutes
- Apply over difficult substrates

Coverage: 25-30 sqft. at 1/8" thickness
Packaging: 25 lb. bags

Smoothness



SikaLevel® SkimCoat

Fast setting, reprofiling mortar for use in feather edge applications before sensitive floor coverings

- Easy to use
- High adhesion
- No moisture limitations

Coverage: Approx. 35 sqft. at 1/8" thickness
Packaging: 4 x 10 lb. bags/packs

MVER Tolerable



Sika® Latex R

Acrylic Latex Bonding Agent and Admixture for Portland Cement Mortars and Grouts

- Concrete/Mortar/Grout/etc. containing SikaLatex® R exhibits improved adhesion
- Increased adhesive strength of mortar/concrete when used as a bonding grout
- Increased resistance to freeze/thaw durability
- Does not produce a vapor barrier

Packaging: 1 and 5 gal. jugs
For use with: SikaLevel®-025 Patch

As admixture/mixing solution:
With mixer running, add SikaLatex® R and then the cement based product. Replace the amount of water recommended by the product. Do not dilute with water.

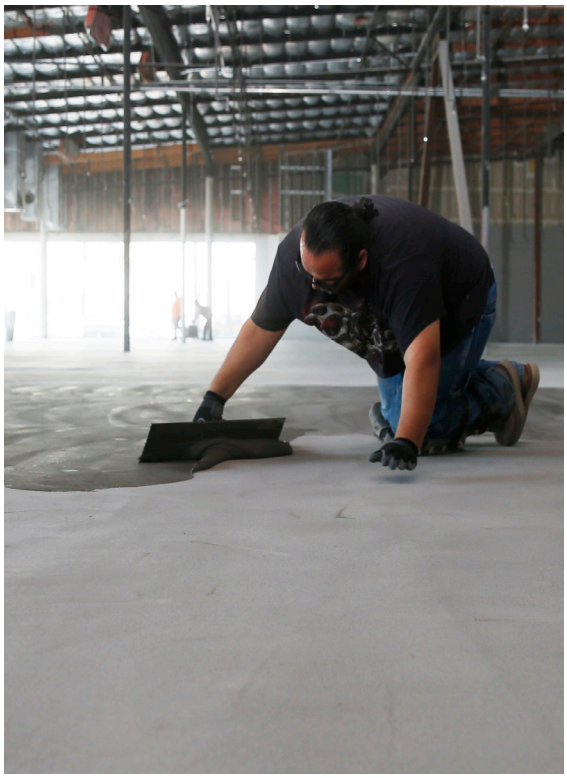

NOTES

SIKALEVEL® - UNDERLAYMENTS

SikaLevel®-125

Durable self-leveling underlayment

- Economical
- Levels new and old floors

Coverage: 21 sq.ft. at 1/4" per bag
Packaging: 50 lb. bags



SikaLevel®-325

High performance self-leveling underlayment

- Interior & exterior use
- Deep pour
- High strength

Coverage: 26 sq.ft. at 1/4" per bag
Packaging: 55 lb. bags



SikaLevel®-225

Premium self-leveling underlayment

- Superior flow
- Long workability
- Quick turnaround

Coverage: 28 sq.ft. at 1/4" per bag
Packaging: 55 lb. bags



	Application Thickness		
	Minimum	Maximum	With Aggregate
SikaLevel®-125	1/8''	2''	3''
SikaLevel®-225	1/16''	2''	3''
SikaLevel®-325	1/8''	3''	4''

	Floor Covering Times		Compressive Strength
	Non Moisture Sensitive	Moisture Sensitive	28 Days
SikaLevel®-125	2 - 3 hours	2 - 3 days	4,000 psi
SikaLevel®-225	3 hours	16 hours	4,500 psi
SikaLevel®-325	4 hours	24 hours	5,300 psi

NOTES

WOOD FLOOR ADHESIVES

SikaBond®-T55

Trowel Grade, Polyurethane Wood Flooring Adhesive

- Elongation: 400%
- Tensile Strength: 217 psi at 73°F and 50% RH

Coverage: Moisture Control: 30 - 35 sq.ft./gal
Adhesive Only: 45 - 50 sq.ft./gal
Packaging: 4 US. gal. pails



SikaBond®-T25

Trowel Grade, Polyurethane Wood Flooring Adhesive

- Elongation: 125%
- Tensile Strength: 150 psi at 73°F and 50% RH

Coverage: Moisture Control: 30 - 35 sq.ft./gal.
Adhesive Only: 45 - 50 sq.ft./gal.
Packaging: 4 US. gal. pails



SikaBond®-T17

Trowel Grade, Polyurethane Wood Flooring Adhesive

- Elongation: 100%
- Tensile Strength: 150 psi at 73°F and 50% RH

Coverage: Moisture Control: 30 - 35 sq.ft./gal.
Adhesive Only: 45-50 sq.ft./gal.
Packaging: 4 US. gal. pails



SikaBond®-6200

Pressure Sensitive Wood Flooring Adhesive

- Very easy to spread
- Increased spread rate and productivity

Coverage: Adhesive Only: 60 sq.ft./gal.
Packaging: 4 US. gal. pails



NOTES

SPECIALTY WOOD FLOOR ADHESIVES

SikaBond®-T21

All-in-One, Sound Control, Moisture Barrier Wood Flooring Urethane Adhesive

- Elongation: 270%
- Tensile Strength: 150 psi at 73°F and 50% RH
- Unlimited subfloor moisture vapor protection

Coverage: All-in-One: 30 - 35 sq.ft./gal. **Adhesive Only:** 45 - 50 sq.ft./gal.
Packaging: 4 US. gal. pails
Sound Ratings*: ΔIIC: Up to 21, **STC:** Up to 62



SikaBond®-T100

All-in-One Hybrid, Sound Control, Moisture Barrier Wood Flooring Adhesive

- Elongation: 150%
- Tensile Strength: 150 psi at 73°F and 50% RH
- Unlimited subfloor moisture vapor protection
- Easily cleans off prefinished floors before and after cure

Coverage: All-in-One: 30 - 35 sq.ft./gal. **Adhesive Only:** 45 - 50 sq.ft./gal.
Packaging: 4 US. gal. pails
Sound Ratings*: STC: Up to 62, **IIC:** Up to 67



SikaBond®-7700

Hybrid Sound Control, Moisture Barrier Wood Flooring Adhesive

- Elongation: ~125%
- Tensile Strength: 150 psi at 73°F and 50% RH
- Moisture control up to 15 lbs./90% RH
- Easily cleans off prefinished floors before and after cure

Coverage: Sound & Moisture Control: 30 - 35 sq.ft./gal. **Adhesive Only:** 45 - 50 sq.ft./gal.
Packaging: 4 US. gal. pails
Sound Ratings*: Independently tested for IIC



SikaBond® T-85

Hybrid Sound Control, Moisture Barrier Wood Flooring Adhesive

- Elongation: ~100%
- Tensile Strength: 150 psi at 73°F and 50% RH
- Moisture control up to 12 lbs./85% RH
- Easy spread formula with excellent ridge retention

Coverage: Sound & Moisture Control: 30 - 35 sq.ft./gal. **Adhesive Only:** 45 - 50 sq.ft./gal.
Packaging: 4 US. gal. pails
Sound Ratings*: Independently tested for IIC



***When used as a sound control membrane at the specified coverage.**

Application Guide

Product	Limitations for Moisture Control Application	Adhesive Only		Moisture Protection: 100% coverage is required		Provides Sound Control
		Engineered Wood Width	Solid Wood Width	Engineered Wood Width	Solid Wood Width	
SikaBond®-T21	Unlimited	No width limit	8”	No width limit	8”	Y
SikaBond®-T55	15# CC, 90% RH	No width limit	No Width limit	No width limit	8”	N
SikaBond®-T25	12# CC, 87% RH	No width limit	5”	No width limit	5”	N
SikaBond®-T17	8# CC, 85% RH	No width limit	5”	No width limit	5”	N
SikaBond®-T100	Unlimited	No width limit	8”	No width limit	8”	Y
SikaBond®-7700	15# CC, 90% RH	No width limit	8”	No width limit	8”	Y
SikaBond® T-85	12# CC, 85% RH	No width limit	5”	No width limit	5”	Y
SikaBond®-6200	-	5”	-	-	-	N
Sika® AcouBond® System	-	No width limit	No Width limit	-	-	Y

RESILIENT FLOOR ADHESIVES

SikaBond®-6100

All-in-One Hard-Set Hybrid, Sound Control, Moisture Barrier Resilient Flooring Adhesive

- Installs LVT/LVP/SVT, VCT, vinyl sheet goods, WPC/SPC, rigid core planks, carpet tile, rubber flooring, cork flooring/underlayments and vinyl stair tread
- Unlimited subfloor moisture vapor protection
- Very easily spread with easy clean up
- 12-month shelf-life

Coverage: 150-260 sq.ft./gal
Packaging: 2 US. gal. pails
Sound Ratings: STC: Up to 63, **IIC:** Up to 68; **HIIC:** Up to 75



SikaBond®-6000

Premium Universal Firm-Set Acrylic Resilient Flooring Adhesive

- Installs LVT/LVP, VCT, vinyl sheet goods, WPC/SPC, rigid core planks, carpet tile, rubber flooring, cork/rubber/foam underlayments, vinyl stair tread, linoleum and wall base
- MVER up to 15 lbs./99% RH
- 18-month shelf-life

Coverage: 185-500 sq.ft./1.25 gal
Packaging: 4 and 1.25 US. gal. pails



SikaBond®-5900

Premium Pressure Sensitive Resilient Flooring Adhesive

- Installs LVT/LVP, vinyl sheet goods, WPC/SPC, rigid core planks, carpet tile, rubber flooring and cork/rubber/foam underlayments
- MVER up to 14 lbs./99% RH
- 2-year shelf-life

Coverage: 150-400 sq.ft./gal
Packaging: 4 and 1 US. gal. pails



SikaBond®-5700

Pressure Sensitive Resilient Flooring Adhesive

- Installs LVT, LVP, VCT, vinyl sheet goods, carpet tile, rubber flooring and cork/rubber underlayments
- MVER up to 12 lbs./95% RH
- 2-year shelf-life

Coverage: 150-400 sq.ft./gal
Packaging: 4 and 1 US. gal. pails



NOTES

ACOUSTICAL ABATEMENT & SPECIALTY SOLUTIONS

Sika® AcouBond® System

Elastic bonding and acoustical dampening for wood floors

- SikaBond®-T53 Elongation: 500%
- Tensile Strength: 261 psi at 73ºF and 50% RH

Coverage: SikaBond®-T53 (adhesive):
1 unipac = 13.4 sq.ft.
20 unipacs = 269 sq.ft.
SikaLayer®-03 (acoustic mat):
1 roll = 269 sq.ft.
Packaging: SikaBond®-T53 (adhesive): 20 fl.oz. unipac (case of 20)
SikaLayer®-03 (acoustic mat): Roll

Sound Ratings: ΔIIC: Up to 24, **STC:** Up to 60, **IIC:** Up to 59



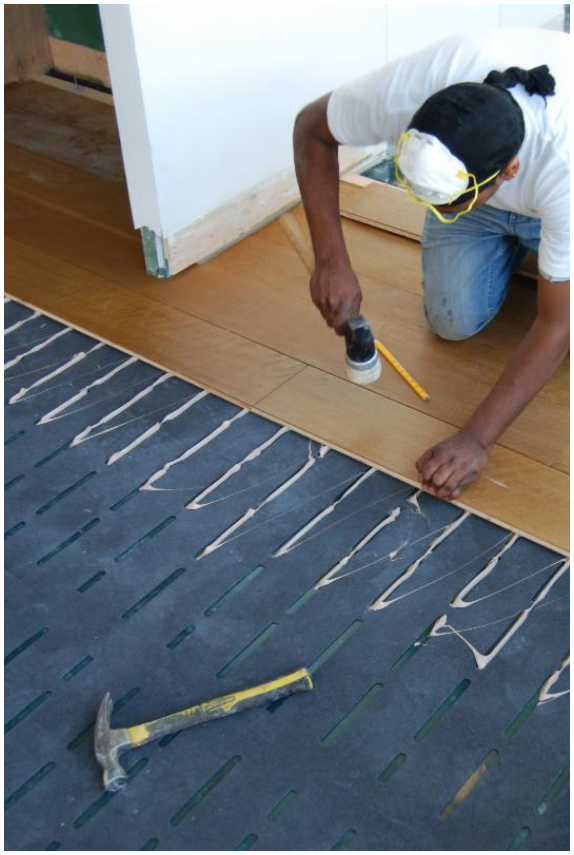

SikaBond® Engineered Wood Floor Repair Kit

Engineered wood floor repair system

- Cleans up easy wet or dry
- Compact and easy to transport
- Saves time and money
- Reusable components

Components:
- 1 - One quart of repair adhesive
- 1 - 60cc plastic syringe assemby
- 2 - Applicator tips
- 2 - Drill bits
- 8 - Wooden dowels
- 1 - Dowel punch

Flooring Types:
- Multi-Ply engineered plank

Additional Refill Adhesive:
- One quart of repair adhesive
- One gallon of repair adhesive

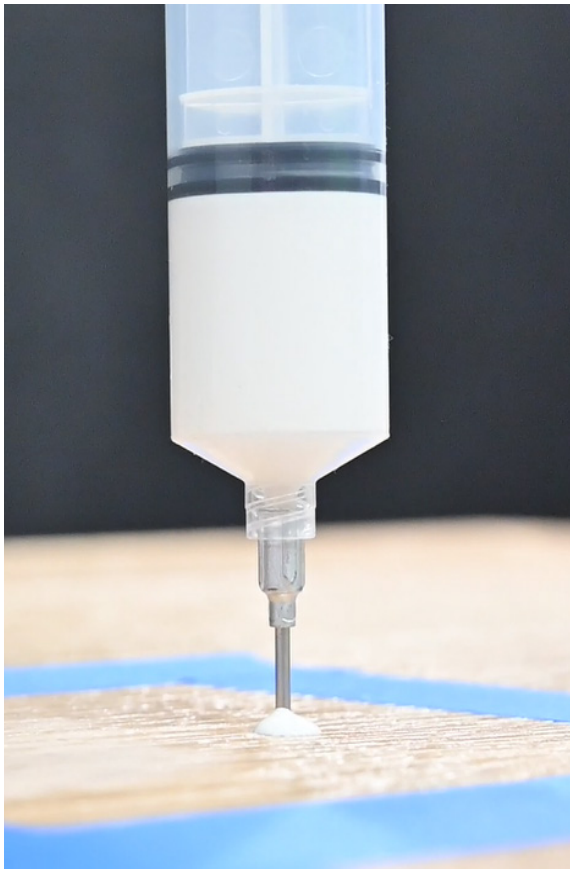

NOTES

ACCESSORIES

SikaBond®-948 Low VOC

High-strength, high-solids polyurethane adhesive

- High green grab formula
- 1-2 hour firm set and quick dry capabilities
- Industry-leading tackstrip installation adhesive
- Low VOC and low odor formulation

Packaging:
10.6 oz cartridges (24 per case);
29 oz cartridges (12 per case)

Sikaflex®-11FC

One-component, advanced, elastomeric polyurethane adhesive

- Versatile superior adhesion
- Remains permanently elastic
- Good weathering and water resistance
- Can be used in tamper resistant joints

10.1 fl. oz. cartridge	Seals 12.4 lineal ft. of 1/2 x 1/4 in. bead
20 fl. oz. sausage	Seals 25 lineal ft. of 1/2 x 1/4 in. bead

SikaBond®-910 Construction Adhesive

One-component, moisture cured, elastomeric polyurethane adhesive

- Glue assist installations (to assist with the nailing schedule of wood flooring)
- Apply using Cordon System or Serpentine System
- Highly elastic

10.1 fl. oz. cartridge	Seals 12.2 lineal ft. of 1/2 x 1/4 in. bead
20 fl. oz. sausage	Seals 24 lineal ft. of 1/2 x 1/4 in. bead
29 fl. oz. cartridge	Seals 35 lineal ft. of 1/2 x 1/4 in. bead

SikaBond®-900

Tongue & groove flooring adhesive

- Use for all types of laminate and floating wood floors
- Quick drying
- Easy clean up when wet
- Passes type II water resistance

16 fl. oz. bottle	100-150 lineal ft.

SikaBond® Remover

Fast drying solvent cleaner

- Ideal for SikaBond® urethane adhesives even after curing
- Does not leave "ghosting" on wood floor finish
- Leaves no residue
- Low odor

Packaging: 1 pint bottles; 12 per case

Application Tools

Manual drive and pneumatic caulk guns for dispensing 20 oz. adhesive sausages

Flooring trowels for successful application of flooring adhesives

- **P5 Trowel:** Adhesive Only Applications (45-50 sq.ft./gal.)
- **SC+MB Trowel:** All-in-One Applications (30-35 sq.ft./gal.)
- **TR-2:** Flat V Notch (60 sq. ft./gal.)
- **TR-10:** V Notch (30-35 sq. ft./gal.)
- **TR-11:** V Notch (30 sq. ft./gal.)

NOTES

WARRANTY

Product Category	Product Name	Carpet, Sheet Vinyl, LVT & Wood Floors
Moisture Barriers	Sika® MB Sika® MB EZ Rapid	**Equal to the Floor Covering Manufacturer's Warranty Period**
Primers	SikaLevel®-01 Primer Plus SikaLevel®-02 EZ Primer	
Patch, Repair and Self-Leveling Compounds	SikaLevel® SkimCoat SikaLevel®-025 Patch SikaLevel®-325 SikaLevel®-225 SikaLevel®-125	
Flooring Adhesives	SikaBond®-T21 SikaBond®-T55 SikaBond®-T25 SikaBond®-T17 SikaBond®-T100 SikaBond®-7700 SikaBond® T-85 SikaBond®-6200 SikaBond®-6100 SikaBond®-6000 SikaBond®-5900 SikaBond®-5700	
Sound Abatement	Sika® AcouBond® System	

WHAT DOES THE SIKA SECURE WARRANTY COVER?

Labor and Materials are covered by the Sika® Secure Warranty. To get the benefit of a Sika® Limited Material and Labor Warranty you must first fulfill the warranty application requirements.

In the event of a valid claim under this Warranty, Sika® in its discretion will either pay the reasonable cost of labor and materials to repair or replace on a square foot basis the portion of the floor proven to be defective due to a defect in the Sika® Product(s) subject to exclusions as set in the Warranty. Sika® will repair or replace the affected floor one time only. Any repairs made prior to Sika® evaluating the claim will void this Warranty. Please contact your local Sika® Sales Representative for more information and warranty requirements.

HOW ARE THE TERMS OF THE "SIKA SECURE WARRANTY" DEFINED?

The Sika® Secure Warranty length is defined as a period of time equal to the flooring manufacturer's warranty period.

If no flooring manufacturer's warranty applies, "Sika Secure Warranty" is defined as a period of time not to exceed **10 years for carpet and sheet vinyl, 15 years for luxury vinyl tile (LVT), or 25 years for wood floor or other floor covering systems**.

PRODUCT SELECTION CHART

	Product	Description	Floor Coverings							
			Engineered Wood	Solid Wood	Ceramic Tile	Vinyl Tile (LVP, LVT, etc.)	Cork/Rubber Underlay-ment	Floating Floors	Residential Carpet Pad	Linoleum
Moisture Barriers & Primers	**Sika® MB**	Moisture barrier, substrate consolidator and adhesion promoter two-component epoxy	■	■	■	■	■	■	■	■
	Sika® MB EZ Rapid	One-component, rapid-drying, polyurethane resin, moisture mitigation system and substrate solidifier	■	■	■	■	■	■	■	■
	SikaLevel®-01 Primer Plus	Primer for porous substrates	■	■	■	■	■	■	■	■
	SikaLevel®-02 EZ Primer	Primer for non-porous substrates. Provides optimum adhesion on tight substrates	■	■	■	■	■	■	■	■
Self Leveling Underlayments & Patches	**SikaLevel®-125**	Durable, cementitious, self-leveling underlayment	■	■	■	■	■	■	■	■
	SikaLevel®-225	Superior flow, cementitious, self-leveling underlayment	■	■	■	■	■	■	■	■
	SikaLevel®-325	High strength, cementitious, self-leveling underlayment	■	■	■	■	■	■	■	■
	SikaLevel®-025 Patch	Rapid Setting Cement-based Patching Compound from 1/16" up to 1/2"	■	■	■	■	■	■	■	■
	SikaLevel® SkimCoat	Fast Setting Cement-based Patching Compound from feather edge up to 1/2"	■	■	■	■	■	■	■	■
Flooring Adhesives	**SikaBond®-T17; SikaBond®-T25; SikaBond®-T55**	Polyurethane wood flooring adhesive	■	■			■			
	SikaBond®-T21	All-in-one polyurethane adhesive for moisture and sound protection	■	■			■			
	SikaBond® T-85; SikaBond®-7700; SikaBond®-T100	Hybrid sound control, moisture barrier wood flooring adhesive	■	■			■			
	SikaBond®-6200	Pressure sensitive wood flooring adhesive	■				■*			
	SikaBond®-6100	All-in-one hard-set hybrid resilient flooring adhesive				■	■		■	
	SikaBond®-5700; SikaBond®-5900	Pressure sensitive resilient flooring adhesive				■	■		■	
	SikaBond®-6000	Premium universal firm-set acrylic resilient flooring adhesive				■	■		■	■
	Sika® AcouBond® System	Elastic bonding and acoustical dampening for wood floors	■	■						

Always refer to the most recent issue of the local Product Data Sheets and flooring manufacturer's recommendations and technical guidelines. Mock-ups for bond and compatibility test are required.

Substrates										Advantages	
Concrete, Cementi-tious Patching + Repairing + Self-Leveling	Gypsum	Plywood	Quarry Tiles	Vinyl Tile (VCT, etc.)	Asphaltic Cutback	Adhesive Residues	Terrazzo	Radiant Heat	Rubber Underlayment	Moisture Protection	Sound Reduction
■	■	■	■*		■*	■*	■*	■		■	
■	■	■			■*	■*	■*			■	
■	■	■									
		■	■*	■		■*	■*	■			
■*	■* or **	■* or *	■*	■*	■**	■*	■*	■*			
■*	■* or **	■* or *	■*	■*	■**	■*	■*	■*			
■*	■* or **	■* or *	■*	■*	■**	■*	■*	■*			
■	■* or **	■* or *	■*	■*	■**	■*	■*	■*			
■	■* or **	■* or *	■*	■*	■**	■*	■*	■*			
■	■*	■	■*	■**	■*	■*	■*	■	■	■	
■	■*	■	■*	■**	■*	■*	■*	■	■	■	■
■	■*	■	■*	■**	■*	■*	■*	■	■	■	■
■	■*	■	■*	■**	■*	■*	■*				
■	■*	■	■*	■**	■*	■*	■*	■	■	■	■
■	■*	■	■*	■**	■*	■*	■*	■	■		
■	■*	■	■*	■**	■*	■*	■*	■	■		
■	■*	■	■*	■**	■*	■*	■*	■			■

*Sika® MB & MB EZ Rapid *SikaLevel® -01 Primer Plus *SikaLevel®-02 EZ Primer *SikaLevel® Underlayments
*Mechanically Prepared *Embossed *Must have 50% of old material removed *Water-Resistant *Cork Only

SIKA SECURE

MAKE YOUR FLOOR SIKA SECURE

For more information, contact Sika: Phone: 1-800-933-SIKA (Nationwide), Website: www.sikasecure.com

Our most current General Sales Conditions shall apply. Please consult most recent issue of the Product Data Sheets prior to any use and processing.

SIKA CORPORATION
201 Polito Avenue
Lyndhurst, NJ 07071
Phone: 201-933-8800
Fax: 201-933-6225

BUILDING TRUST

© Sika Corporation / Business Unit Interior Finishing / 08.3191.5 /10/2026