

ROOFING Sikalastic® 500

SILICONE LIQUID APPLIED ROOF COATING, SINGLE COMPONENT, ULTRA HIGH SOLIDS, LOW VOC & UV STABLE

- Single component, Easy to apply, No mixing errors
- Highly UV resistant , Non-yellowing
- Excellent adhesion to a variety of roof surfaces
- Retains its integrity from low temperatures to 250°F
- Meets California VOC and SCAQMD, CRRC Rated, Miami Dade Approved
- Durable : Infrequent and low maintenance costs
- Resistant to ponding water Ideal for roof refurbishment solutions
- Seamless weatherproofing system



Sikalastic® 500


EASY TO APPLY, DURABLE, LOW COST MAINTENANCE SYSTEM

APPLICATIONS

- SYSTEM PROVIDES TENACIOUS ADHESION WITH AN EXISTING ROOF SYSTEM TO FORM A MONOLITHIC MEMBRANE
- EXISTING ROOFS INCLUDE BUT ARE NOT LIMITED TO MODIFIED BITUMEN/BUILT-UP ROOFS, CONCRETE, EPDM/HYPALON, PVC, TPO, AND METAL

ADVANTAGES

- ABLE TO WITHSTAND PONDING WATER
- RECOAT TIME MAXIMUM OF 7 DAYS BETWEEN COATS
- UV RESISTANT
- VOC COMPLIANT: PRODUCT IS CERTIFIED TO BE DISTRIBUTED IN 50 STATES
- INFREQUENT AND LOW MAINTENANCE COSTS

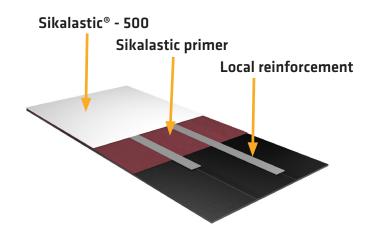



Our most current general sales conditions shall apply. Please consult the Product Data Sheets prior to any use and processing



SIKA CORPORATION • ROOFING

100 Dan Road • Canton, MA 02021 • USA
East Tel: 888-552-9769 West Tel: 888-509-3350
Fax: 781-828-5365
webmaster.sarnafil@us.sika.com
usa.sika.com/sarnafil
© Sika Corporation / 06.2211.5 / 04/2024

PRIMERS

Sikalastic® - 501 Primer:

metal³, MOD-BIT^{2,3}, BUR^{2,3}, and as a rust inhibitor

Sikalastic® - 502 Primer:

concrete^{1,3}, brickwork³, wood³, metal³, polyurethane coating/foam³, acrylic coatings³

Sikalastic® - 503 Primer:

PVC/TPO³

Sikalastic® - 504 Primer:

EPDM/Hypalon³

Abrading³:

Is required for metals, lead, aluminum, stainless steel

- **1.** New cementitious substrates must be Portland base and cured a min 14-days
- 2. The presence of volatiles may cause discoloration of Sikalastic® 500 of not properly primed
- **3.** Surface evaluation and field adhesion testing may be required

COLORS & PACKAGING

White - 5-gal pail (stocked), 50-gal drum (MTO) Light Grey - 5-gal pail (stocked), 50-gal drum (MTO) Tan (MTO) - 5-gal pail, 50-gal drum

Custom Colors (MTO) - 5-gal pail (40-gal min)



