

SikaTile®-190 Reinforcing Fabric

DURABLE, ABSORBENT, FLEXIBLE, POLYESTER REINFORCING FABRIC FOR USE WITH SIKATILE'S WATERPROOFING MEMBRANES

- For use over cracks, coves, corners and areas around drains
- **Packaging:** 8" x 165' roll (110 sq. ft.)

Attributes Include:



BUILDING TRUST



SikaTile® -190 Reinforcing Fabric

POLYESTER REINFORCING FABRIC FOR USE WITH SIKATILE'S WATERPROOFING MEMBRANES

WHERE TO USE

- For use over cracks, coves, corners, change-of-plane, and areas around drains
- Use with SikaTile®-100 Moisture Guard and other liquid membranes

RECOMMENDED SUBSTRATES

SikaTile®-190 Reinforcing Fabric is a high-performance, type II, flexible, durable, nonwoven, polyester engineered fabric for optional use with SikaTile®-100 Moisture Guard when installed under ceramic tile or stone on residential and commercial interior applications and is used to reinforce liquid waterproof membranes. SikaTile®-190 Reinforcing Fabric is ideal for use over areas such as cracks, coves, corners, and areas around drains when used with SikaTile®-100 Moisture Guard and can easily be cut to size with scissors or a razor knife, and easily incorporated in the liquid membrane.

APPROXIMATE COVERAGE


8" x 165' roll (110 sq. ft.)

FEATURES AND BENEFITS

- Significantly reduces reflective cracking
- Flexible and resists tearing
- High tensile strength
- Easy to cut and install
- Non-adhesive lays flat
- Tough and durable

NOTE: Always refer to Current Product Data Sheet and SDS for detailed performance specifications prior to use.

PROPERTY	TEST METHOD	TYPICAL RESULTS
Total Thickness	-	0.30 mm (11.8 mils)
Weight	-	0.2 oz./sq.ft
Grab Tensile Strength	ASTM D4632	MD 61 lb. /ft. (270 N) TD 61 lb. /ft. (270 N)
Grab Tensile Elongation	ASTM D4632	MD 45%, TD 50%
Tear Strength		100 N
Specific Gravity		1.37 g/mL

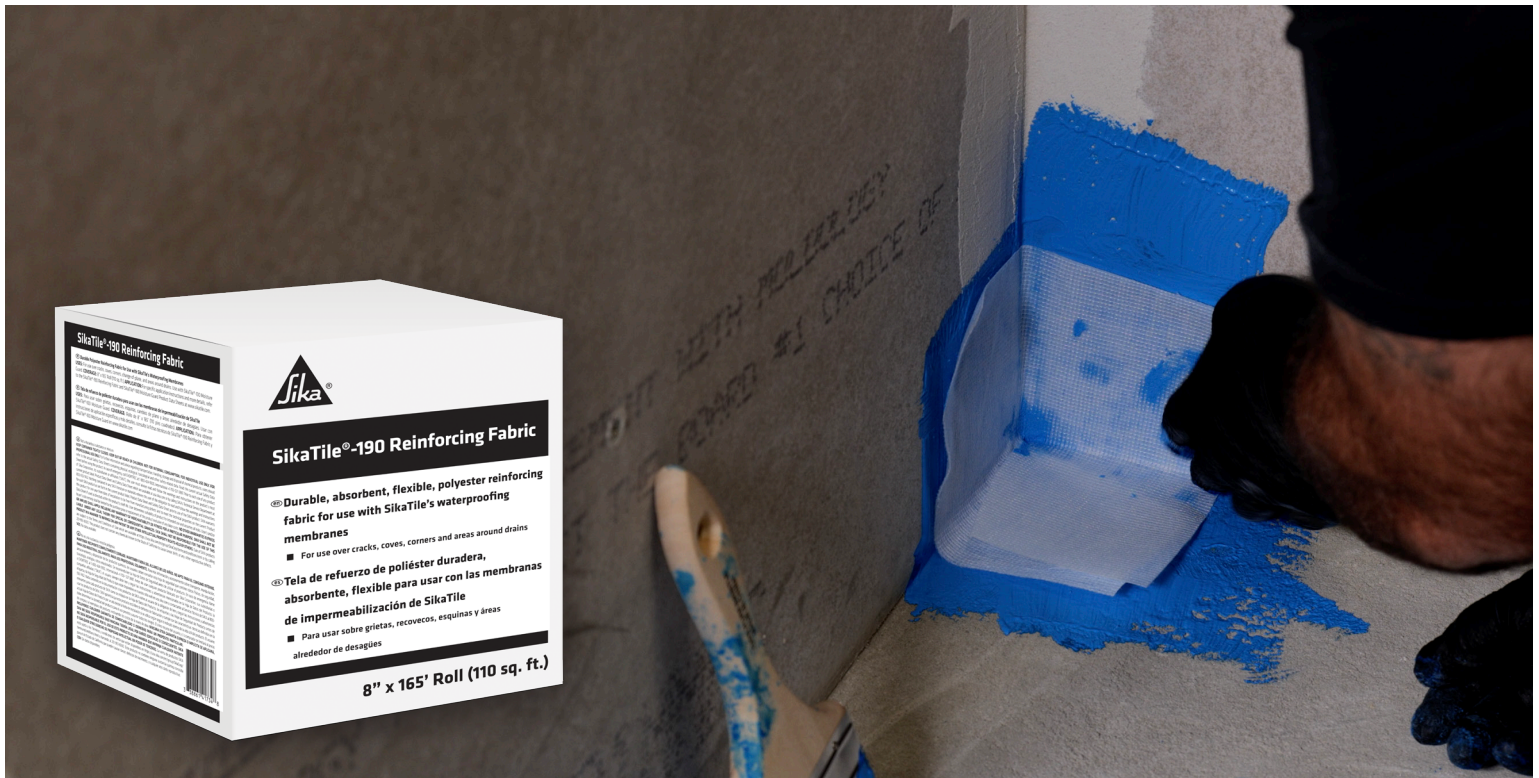

FOR MORE INFORMATION:

Contact Sika: Phone 800.933.SIKA(7452) Website: www.SikaTile.com

Sika Corporation
201 Polito Avenue
Lyndhurst, NJ 07071
Phone: 201-933-8800
Fax: 201-933-6225

BUILDING TRUST

