



# SIKA® SILBRIDGE


## ULTRA-LOW MODULUS ELASTOMERIC SILICONE PROFILES

Sika® Silbridge-400 (smooth) and Sika® Silbridge-410 (ribbed) are extruded ultra-low modulus translucent elastomeric silicone strips that are bonded to substrates using Sikasil® WS-305 AM sealant as the adhesive. These strips are specifically designed for flashing and transition applications weatherproofing against air and water infiltration.

### PRODUCT APPLICATIONS

- Ease of installation and quality control
- Window perimeter joint seals
- Bridging between window and/or curtain wall
- Sealing air and weather barriers to adjacent curtain walls, store fronts and windows
- Capable of sealing high movement transition joints
- Resistant to ultraviolet exposure and weathering

# SIKA® SILBRIDGE

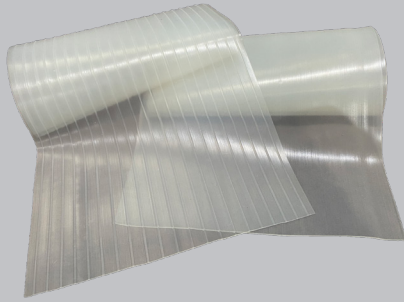

Sika® Silbridge-400 (Smooth)					
SAP#	Description	Width	Length	Color	Quantity per carton
612420	0.045" x 3" x 100'	3"	100'	Translucent	1 Roll
611949	0.045" x 4" x 100'	4"	100'	Translucent	1 Roll
611948	0.045" x 6" x 100'	6"	100'	Translucent	1 Roll
611947	0.045" x 8" x 100'	8"	100'	Translucent	1 Roll
Sika® Silbridge-410 (Ribbed)					
SAP#	Description	Width	Length	Color	Quantity per carton
611946	0.03" x 6" x 100'	6"	100'	Translucent	1 Roll
611945	0.03" x 8" x 100'	8"	100'	Translucent	1 Roll

## APPLICATION DIRECTIONS: Consult Product Data Sheet for complete instructions and limitations.

1. Be sure surface is clean, dry and sound using recommended pretreatment.
2. Apply masking tape to both sides of the joints to be bridged for visual applications.
3. Apply min. 1/4" bead of Sikasil® WS-305 AM to each side of the joint so that 3/8" minimum of the substrate has sealant applied once the Sika® Silbridge is pressed into place.
4. Apply Sika® Silbridge within 10 minutes by pressing into sealant, followed by a roller to wet out the Sika® Silbridge and the substrate. Tool any excess adhesive at the edge of the Sika® Silbridge.
5. Remove masking tape and clean any excess sealant before it cures.

### CONTACT US:

#### Sika Industry

30800 Stephenson Highway  
Madison Heights, MI 48071  
Tel: 248.577.0020

#### Sika North America Plant Locations

Lyndhurst, New Jersey  
Lakewood, New Jersey  
Marion, Ohio  
Grandview, Missouri  
Montreal, Quebec

#### North America Silicone Competence Center

995 Towbin Avenue  
Lakewood, NJ 08701

#### Customer Service

800.688.7452

#### Technical Service

email: tsmh@us.sika.com

SIKA warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within shelf life. User determines suitability of product for intended use and assumes all risks. Buyer's sole remedy shall be limited to the purchase price or replacement of product exclusive of labor or cost of labor. **NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.** Sale of Sika products are subject Sika's Terms and Conditions of Sale available at <http://usa.sika.com/> or by calling 201-933-8800. Our most current General Sales Conditions shall apply. Please consult the Data Sheet prior to any use and processing.

REV:12.15.2020