

x

N° 900\_81\_022/023\_C\_appl\_0812


4

### Floor-wall coating with flexible joint sealing

1 : 2

N° 900\_81\_017\_C\_appl\_0812

- 1. Concrete slab
- 2. Crack cut open and troweled off
- 3. Sikafloor® Primer (epoxy) with fabric lining, width ca. 30 cm, thickness ca. 1 mm
- 4. Sikafloor® system

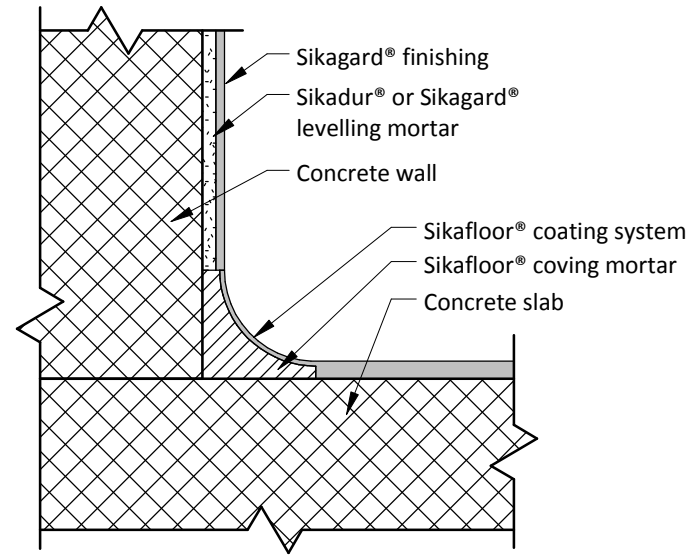

crack

N° 900\_81\_021\_C\_appl\_0812

3

### Floor-wall coating with rigid fillet

1 : 2

N° 900\_81\_016\_C\_appl\_0812

advice are given in good faith based on current knowledge and experience. Sika products when properly stored and applied under normal conditions conform with Sika's recommendations. This only applies to the application(s) expressly referred to herein and is based on laboratory tests which do not replace field tests. In case of changes in the application, such as changes in materials, in case of a different application, please contact our Technical Service prior to using the product. The information contained here is not intended to relieve the user of the product's responsibility for them for the intended application. All orders are accepted subject to our standard terms of sale and delivery. Use always refer to the most recent issue of the Product Data Sheet for the product, copies of which will be supplied.

**Sika Services AG**  
 Tüffenwies 16  
 8048 Zürich  
 Switzerland

Corporate Template  
 Metric