



## SYSTEM DATA SHEET

# Sikafloor® MultiDur EC

---

EPOXY COATING SYSTEM ENGINEERED WITH SIKAFLOOR®-264 AT 24 - 30 MILS (0.6 - 0.8 MM)

---

### PRODUCT DESCRIPTION

Sikafloor® MultiDur EC is a solid color, high gloss, resin-rich, seamless, epoxy-based floor coating. This is well-suited for medium-duty traffic areas. This general service epoxy coating system delivers an easy to maintain smooth surface with good chemical and abrasion resistance. Sikafloor® MultiDur EC typically installed at 24 - 30 mils (0.6 - 0.8 mm).

### USES

Sikafloor® MultiDur EC may only be used by experienced professionals.

Sikafloor® MultiDur EC may be installed over a Sikafloor-UEF Base System when moisture vapor tolerance and/or a temporary floor is desired.

- Medium Duty Manufacturing
- Animal Care Facilities
- Institutions and Correctional Facilities
- Clinical Laboratories
- Walkways and Corridors


### CHARACTERISTICS / ADVANTAGES

- Lower maintenance and life cycle cost versus VCT tile and carpet
- Durable, impermeable and seamless
- Easily cleaned and maintained for a sanitary work environment
- Good chemical resistance
- Protects underlying substrate from a chemical and/or physical attack
- Low odor/low VOC
- Wide range of standard and custom colors
- Optional integral cove, base and curbs

# SYSTEM INFORMATION

## System Structure

Sikafloor® MultiDur EC ~ 24 - 30 mils (0.6 - 0.8 mm)

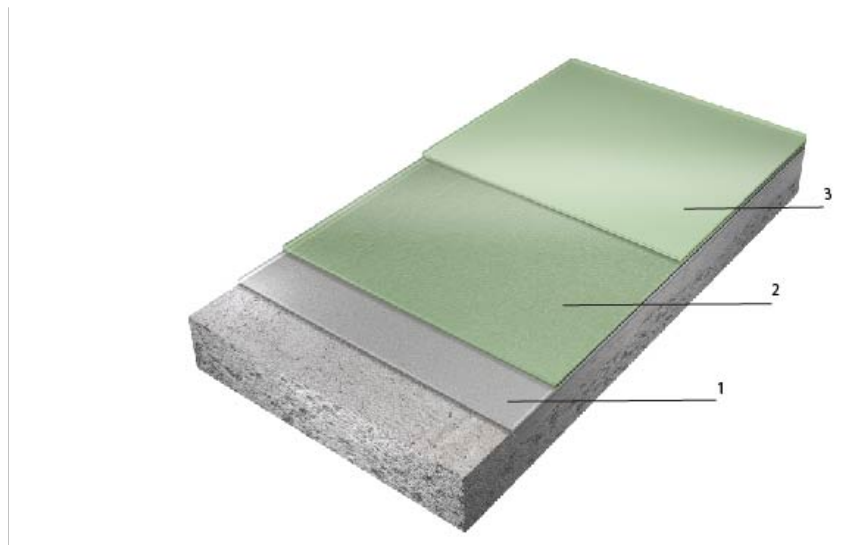

Description	Products	Thickness mils
1. Primer	Sikafloor®-161	8 - 10
2. Top Coat	Sikafloor®-264	8 - 10
3. 2 <sup>nd</sup> Top Coat	Sikafloor®-264	8 - 10

Options Description	Products	Thickness mils
Primers	Sikafloor®-1620	12 - 15
2 <sup>nd</sup> Top Coats	Sikafloor®-165 FS	8 - 10
	Sikafloor®-510 LPL* + Sikafloor® Urethane Pigment Pack	12 - 16
	Sikafloor®-315** + Sikafloor® Urethane Pigment Pack	3 - 4
	Sikafloor®-340** + Sikafloor® Urethane Pigment Pack	4 - 6

\*Sikafloor®-510 LPL would be an alternate 2<sup>nd</sup> top coat to replace Sikafloor®-264 for superior UV resistance, color stability, and increased chemical resistance

\*\*Sikafloor®-340 and Sikafloor®-315 would be an alternate 2<sup>nd</sup> top coat on top of Sikafloor®-264 for increased chemical and abrasion resistance

<b>Color</b>	Available in a broad range of standard and custom colors. Please refer to the Standard Color selection Guide and contact Customer Service for custom color availability
<b>Nominal thickness</b>	24 - 30 mils (0.6 - 0.8 mm)
<b>Minimum thickness</b>	24 mils (0.6 mm)

## TECHNICAL INFORMATION

<b>Water Absorption</b>	0.05 % 2 hours boiling	ASTM C413 at 73°F (23°C) and 50% R.H
<b>Shore D Hardness</b>	82	ASTM D2240 at 73°F (23°C) and 50% R.H
<b>Abrasion Resistance</b>	90 mg loss (CS-17/1000Rotations/1000g)	ASTM D-4060 at 73°F (23°C) and 50% R.H
<b>Compressive Strength</b>	7,426 psi (51.2 Mpa)	ASTM C579 at 73°F (23°C) and 50% R.H
<b>Tensile Strength</b>	4,902 psi (33.8 Mpa)	ASTM D638 at 73°F (23°C) and 50% R.H
<b>Flexural Strength</b>	8,558 psi (59 Mpa)	ASTM D790 at 73°F (23°C) and 50% R.H
<b>Tensile Adhesion Strength</b>	>400 psi (2.7 MPa) (100 % concrete failure)	ASTM D4541 at 73°F (23°C) and 50% R.H
<b>Elongation at Break</b>	8.3 %	ASTM D-638 at 73°F (23°C) and 50% R.H
<b>Chemical Resistance</b>	Contact Sika Technical Service for specific information.	
<b>Water Vapor Transmission</b>	0.33mg/hour/sq.ft	ASTM E96 at 73°F (23°C) and 50% R.H
<b>Coefficient of Friction</b>	0.6	ANSI 326.3 at 73°F (23°C) and 50% R.H

## APPLICATION INFORMATION

Coverage	Description	Products	Approximates Sq.Ft./kit
	1. Primer	Sikafloor®-161	900@8 mils
	2. Top Coat	Sikafloor®-264	900@8 mils
	3. 2 <sup>nd</sup> Top Coat	Sikafloor®-264	900@8 mils
	<b>Options</b>		
	Description	Products	Approximates Sq.Ft./kit
	Primers	Sikafloor®-1620	533@12 mils
		Sikafloor®-165 FS	1,000@8 mils
	2 <sup>nd</sup> Top Coats	Sikafloor®-510 LPL + Sikafloor® Urethane Pigment Pack	1,210@12 mils  3 quarts per 8.33 gallon kit
		Sikafloor®-315 + Sikafloor® Urethane Pigment Pack	2,340@4 mils  2 quarts per 5.34 gallon kit
		Sikafloor®-340 + Sikafloor® Urethane Pigment Pack	2,200@4 mils  2 quarts per 5 gallon kit
<b>Ambient Air Temperature</b>	Minimum/Maximum 50/85 °F (10/30 °C)		
<b>Substrate Temperature</b>	Minimum/Maximum 50/85 °F (10/30 °C)		
<b>Waiting / Recoat Times</b>	Please refer to the individual Product Data Sheets		

## BASIS OF PRODUCT DATA

Results may differ based upon statistical variations depending upon mixing methods and equipment, temperature, application methods, test methods, actual site conditions and curing conditions.

## ENVIRONMENTAL, HEALTH AND SAFETY

For further information and advice regarding transportation, handling, storage and disposal of chemical products, user should refer to the actual Safety Data Sheets containing physical, environmental, toxicological and other safety related data. User must read the current actual Safety Data Sheets before using any products. In case of an emergency, call CHEMTREC at 1-800-424-9300, International 703-527-3887.

## APPLICATION INSTRUCTIONS

### SUBSTRATE PREPARATION

Concrete surfaces must be clean and sound. Remove all

dust, dirt, existing paint films, efflorescence, exudates, laitance, form oils, hydraulic or fuel oils, brake fluid, grease, fungus, mildew, biological residues or any other contaminants which may prohibit a good bond.

Prepare the surface by any appropriate mechanical means, in order to achieve a profile equivalent to ICRI - CSP 3-6. The compressive strength of the concrete substrate should be at least 3,625 psi (25 MPa) at 28 days and a minimum of 218 psi (1.5 MPa) in tension at the time of application.

Repairs to cementitious substrates, filling of blowholes, leveling of irregularities, etc. should be carried out using an appropriate Sika profiling mortar. Contact Sika Technical Service for a recommendation.

### Primer or Smooth Finish Coating

Priming for concrete substrate is required. Prime with either Sikafloor®-161, Sikafloor®-1620 or Sikafloor®- 165 FS. Allow the primer to cure (varies with temperature and humidity) until tack free before applying subsequent coats. Ensure that the primer is pore-free, pinhole-free and provides uniform and complete coverage over the

entire substrate.

Sikafloor®-264 may be used as a primer on concrete substrates for Sikafloor Coating Systems subjected to light traffic. Please refer to the most current and respective Product Data Sheet for further information.

## MIXING

Please refer to the individual Product Data Sheet for each component.

## APPLICATION

Please refer to the individual Product Data Sheet for each component.

## OTHER RESTRICTIONS

See Legal Disclaimer.

## LEGAL DISCLAIMER

- KEEP CONTAINER TIGHTLY CLOSED
- KEEP OUT OF REACH OF CHILDREN
- NOT FOR INTERNAL CONSUMPTION
- FOR INDUSTRIAL USE ONLY
- FOR PROFESSIONAL USE ONLY

Prior to each use of any product of Sika Corporation, its subsidiaries or affiliates ("SIKA"), the user must always read and follow the warnings and instructions on the product's most current product label, Product Data Sheet and Safety Data Sheet which are available at [usa.sika.com](http://usa.sika.com) or by calling SIKA's Technical Service Department at 1-800-933-7452. Nothing contained in any SIKA literature or materials relieves the user of the obligation to read and follow the warnings and instructions for each SIKA product as set forth in the current product label, Product Data Sheet and Safety Data Sheet prior to use of the SIKA product.

SIKA warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within the product's shelf life. User determines suitability of product for intended use and assumes all risks. User's and/or buyer's sole remedy shall be limited to the purchase price or replacement of this product exclusive of any labor costs. **NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL**

### Sika Corporation

201 Polito Avenue  
Lyndhurst, NJ 07071  
Phone: +1-800-933-7452  
Fax: +1-201-933-6225  
[usa.sika.com](http://usa.sika.com)



System Data Sheet  
Sikafloor® MultiDur EC  
May 2024, Version 03.01  
02081190000000148

**APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.**

Sale of SIKA products are subject to the Terms and Conditions of Sale which are available at <https://usa.sika.com/en/group/SikaCorp/termsandconditions.html> or by calling 1-800-933-7452.

SikafloorMultiDurEC-en-US-(05-2024)-3-1.pdf

