


Sikafloor® coating

Floor-wall coating with rigid fillet

Construction

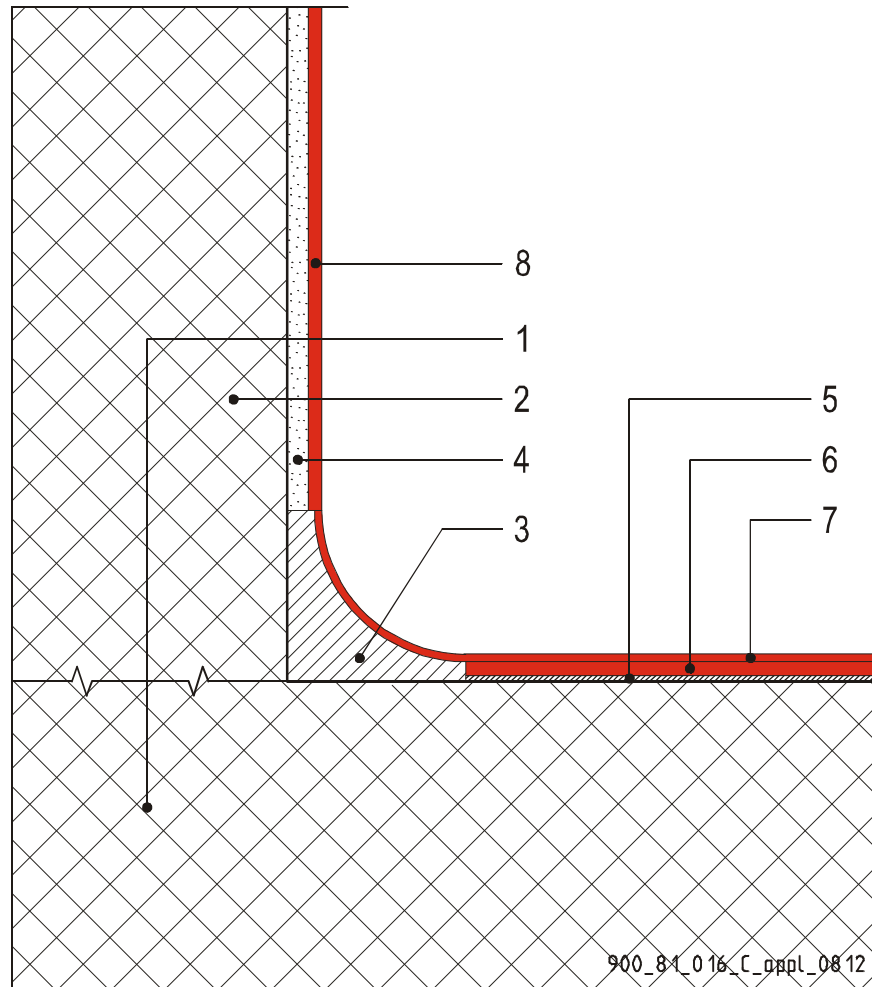

- 1 Concrete slab
- 2 Concrete wall
- 3 Sikafloor® epoxy mortar
- 4 Sikadur® or Sikagard® levelling mortar applied in 1 – 2 working steps
- 5 Sikafloor® Primer (epoxy) thickness ca. 0.1 mm
- 6 Sikafloor® coating in epoxy or PUR thickness ca. 2.0 – 4.0 mm
- 7 Sikafloor® finishing thickness ca. 0.1 – 0.4 mm according to the selected coating system and the mechanical load anticipated in service
- 8 Sikagard® finishing thickness ca. 0.1 – 0.4 mm

The information contained herein and any other advice are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. The information only applies to the application(s) and product(s) expressly referred to herein. In case of changes in the parameters of the application, such as changes in substrates etc., or in case of a different application, consult Sika's Technical Service prior to using Sika products. The information contained herein does not relieve the user of the products from testing them for the intended application and purpose. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.



Sika Services AG

BU Contractors, Tüffenwies 16, CH-8048 Zürich, Switzerland

Phone +41 (0)58 436 40 40, Fax +41 (0)58 436 46 86, www.sika.com