

Typical 2D Details







Typical 2D Details

Table of Contents

- 1. Typical Application
- 2. Typical Application (Isometric)
- 3. Surface Control Joint
- 4. Clad Window Jamb
- 5. Clad Window Head
- 6. Clad Window Sill
- 7. Primed Window Head
- 8. Primed Window Jamb
- 9. Primed Window Sill
- 10. Expansion Joint at Floor Line
- 11. Termination at Soffit or Gable
- 12. Downspout Application
- 13. Pipe Penetration
- 14. Light Fixture
- 15. Dryer Vent
- 16. Termination at Foundation
- 17. Metal Coping
- 18. Corner Bead

Notes:


- The details within are the latest recommendations and are represent in good faith by Sika Corporation US (hereinafter Sika). The details are subject to change without notice. Sika accepts no liability for the end use of the details. For conditions not shown, consult Sika for review of specific details.
- Install Sika materials in accordance with current installation instructions.
- · Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.







TYPICAL APPLICATION

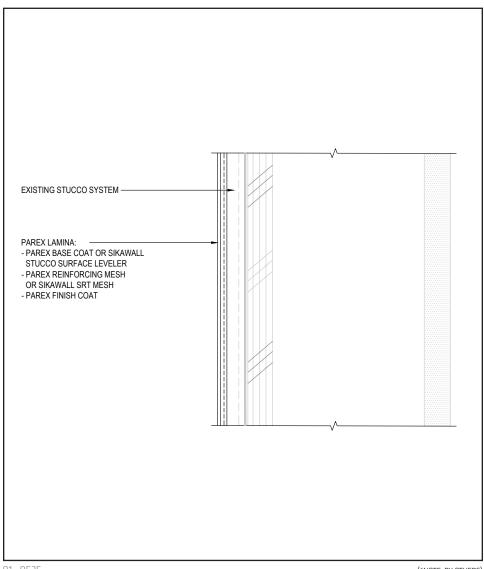

- Prior to resurfacing, consideration should be given to windows and other penetrations.
 Replacing sealant, flashing and/or inferior or damaged windows should be completed as part of a major resurfacing project.
- Perform any repairs required beyond the scope of resurfacing. Please reference Technical Bulletins Procedure for Repairing Stucco for more information.
- Perform bond testing to confirm base coat adhesion. Please reference Technical Bulletin Basics of Conducting Field Adhesion Testing for more information. Apply SikaWall Surface Stabilizer WB to existing paint or acrylic finish as determined by adhesion testing.

01 0525 (*NOTE: BY OTHERS)


- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.







TYPICAL APPLICATION (ISOMETRIC)

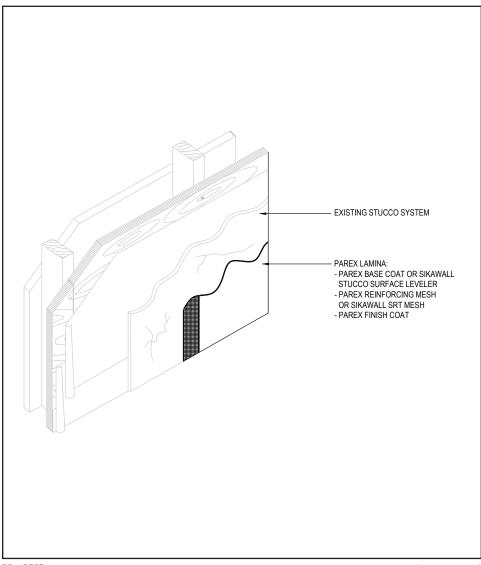

- Prior to resurfacing, consideration should be given to windows and other penetrations.
 Replacing sealant, flashing and/or inferior or damaged windows should be completed as part of a major resurfacing project.
- Perform any repairs required beyond the scope of resurfacing. Please reference Technical Bulletins *Procedure for Repairing Stucco* for more information.
- Perform bond testing to confirm base coat adhesion. Please reference Technical Bulletin Basics of Conducting Field Adhesion Testing for more information. Apply SikaWall Surface Stabilizer WB to existing paint or acrylic finish as determined by adhesion testing.


02 0525 (*NOTE: BY OTHERS)

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.





TYPICAL SURFACE CONTROL JOINT

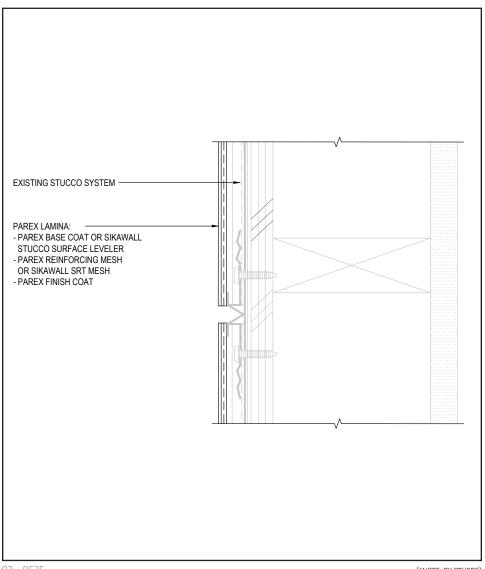

 Ensure control joints are honored and reinforcing mesh and base coat is not continuous over the joint.


03 0525 (*NOTE: BY OTHERS)

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.





TYPICAL CLAD WINDOW JAMB

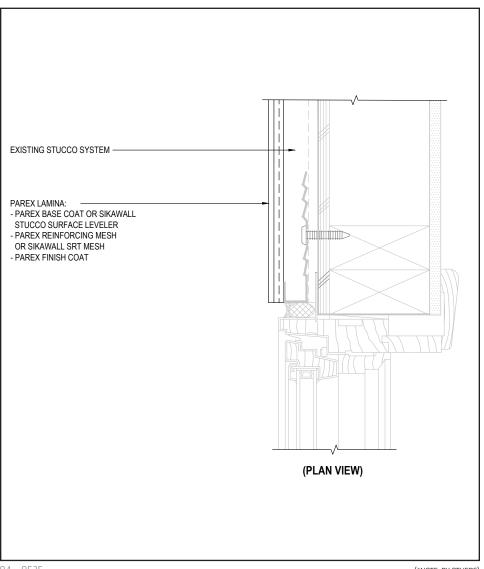

 Reference Acceptable Sealants for use with Parex Wall Systems Technical Bulletin for a list of sealants.


04 0525 (*NOTE: BY OTHERS)

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.





TYPICAL CLAD WINDOW HEAD

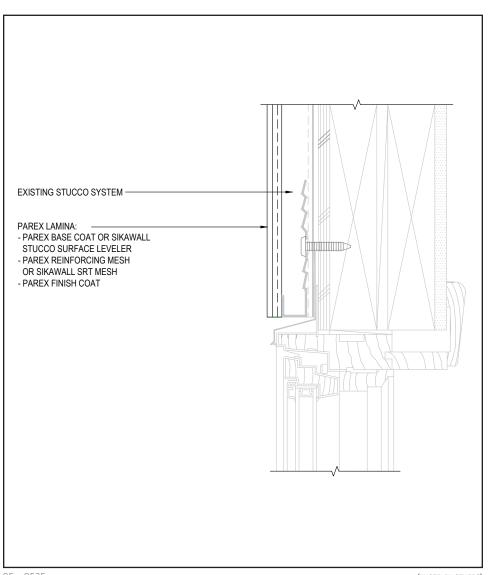


(*NOTE: BY OTHERS) 05 0525

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.





TYPICAL CLAD WINDOW SILL

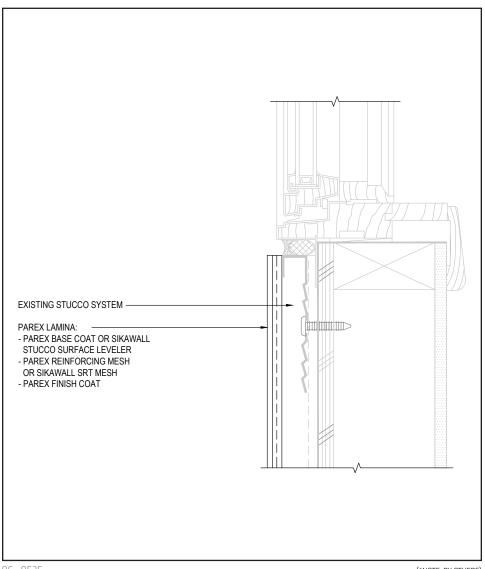

 Reference Acceptable Sealants for use with Parex Wall Systems Technical Bulletin for a list of sealants.


06 0525 (*NOTE: BY OTHERS)

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.





TYPICAL PRIMED WINDOW HEAD

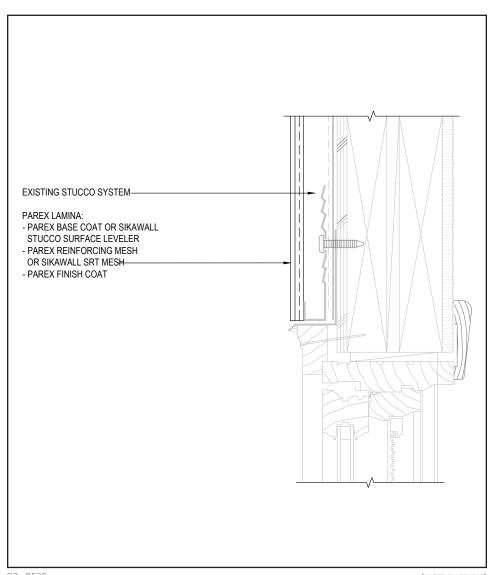


07 0525 (*NOTE: BY OTHERS)

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.





TYPICAL PRIMED WINDOW JAMB

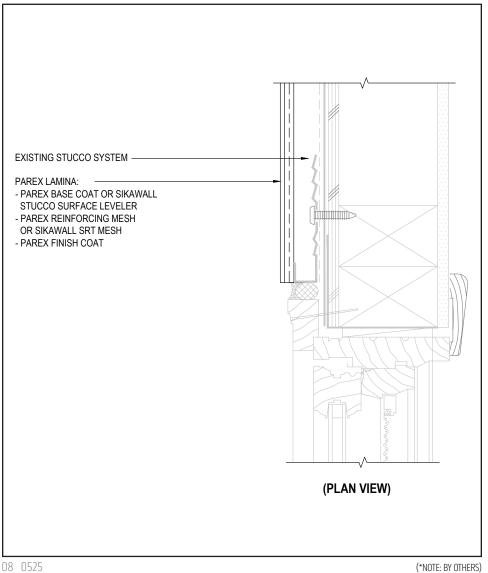


• Reference Acceptable Sealants for use with Parex Wall Systems Technical Bulletin for a list of sealants.

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.





TYPICAL PRIMED WINDOW SILL

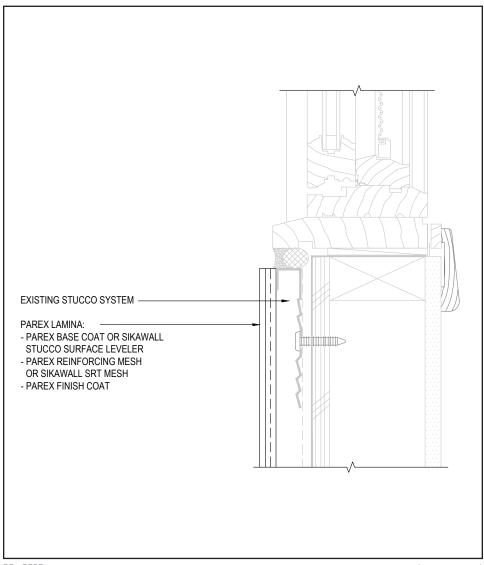

 Reference Acceptable Sealants for use with Parex Wall Systems Technical Bulletin for a list of sealants.


09 0525 (*NOTE: BY OTHERS)

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.





TYPICAL EXPANSION JOINT AT FLOOR LINE

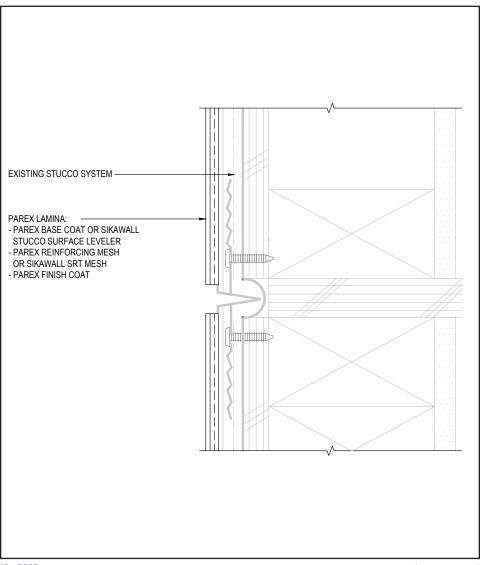

 Ensure expansion joints are honored and reinforcing mesh and base coat is not continuous over the joint.


10 0525 (*NOTE: BY OTHERS)

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.





TYPICAL TERMINATION AT SOFFIT OR GABLE

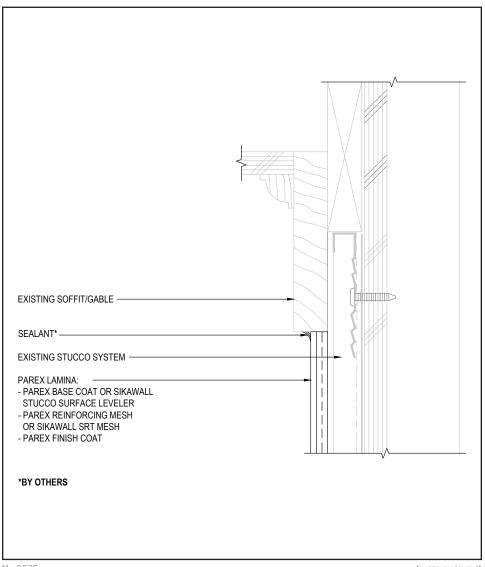

11 0525 (*NOTE: BY OTHERS)

The details within are the latest recommendations and are represented in good faith by Sika Corporation US (hereinafter Sika). The details are subject to change without notice. Sika accepts no liability for the end use of the details. For conditions not shown, consult Sika for review of specific details.


- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.

Technical Service





TYPICAL DOWNSPOUT APPLICATION

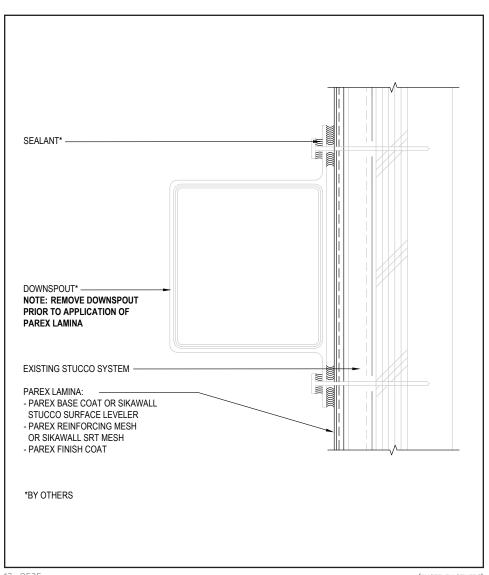


12 0525 (*NOTE: BY OTHERS)

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.





TYPICAL PIPE PENETRATION

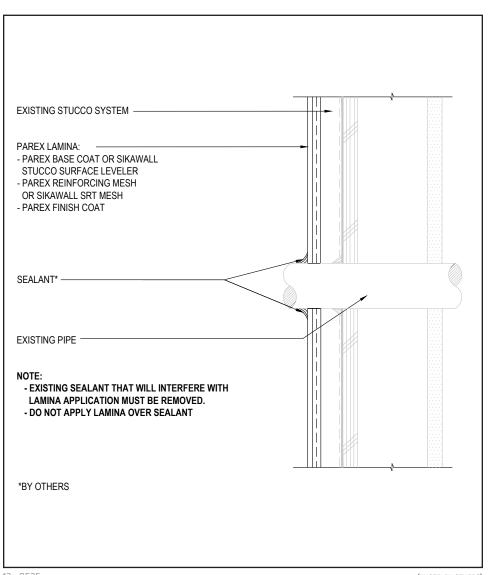

13 0525 (*NOTE: BY OTHERS)

The details within are the latest recommendations and are represented in good faith by Sika Corporation US (hereinafter Sika). The details are subject to change without notice. Sika accepts no liability for the end use of the details. For conditions not shown, consult Sika for review of specific details.


- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.

Technical Service





TYPICAL LIGHT FIXTURE

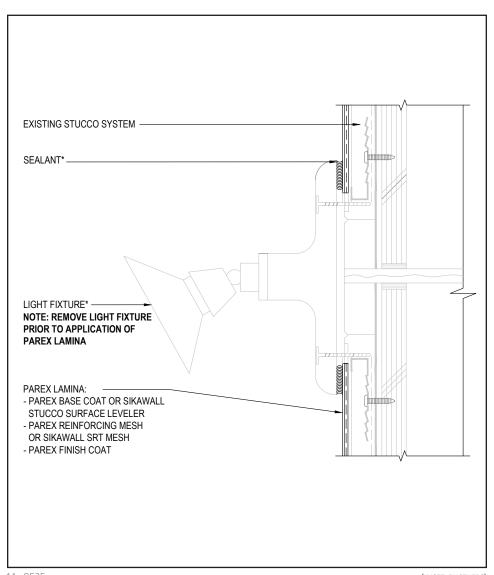


14 0525 (*NOTE: BY OTHERS)

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.





TYPICAL DRYER VENT

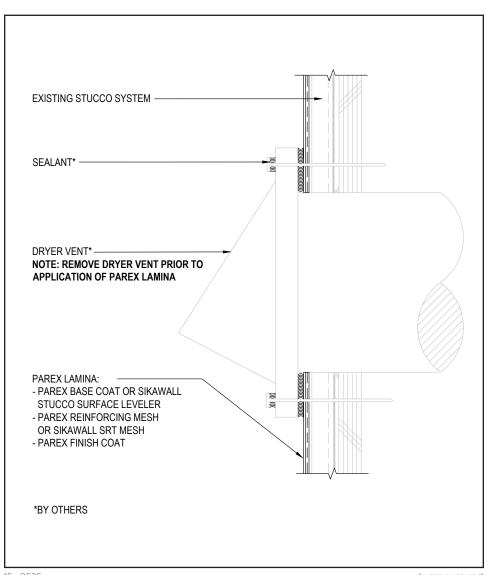


15 0525 (*NOTE: BY OTHERS)

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.





TYPICAL TERMINATION AT FOUNDATION

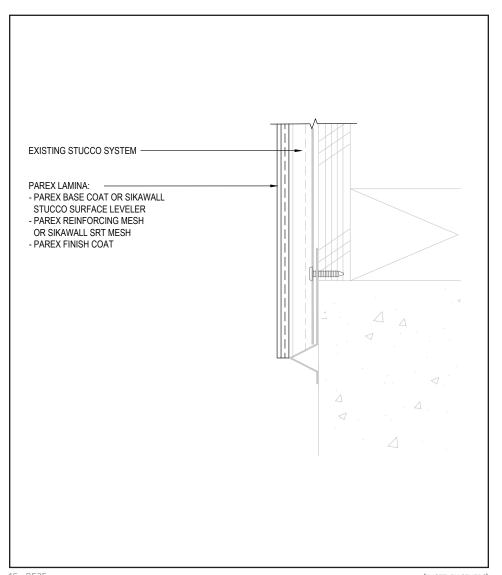

16 0525 (*NOTE: BY OTHERS)

The details within are the latest recommendations and are represented in good faith by Sika Corporation US (hereinafter Sika). The details are subject to change without notice. Sika accepts no liability for the end use of the details. For conditions not shown, consult Sika for review of specific details.


- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.

Technical Service





TYPICAL METAL COPING

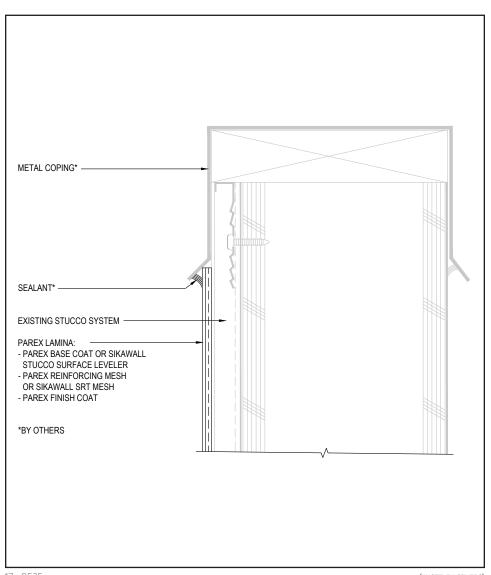


17 0525 (*NOTE: BY OTHERS)

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.





TYPICAL CORNER BEAD

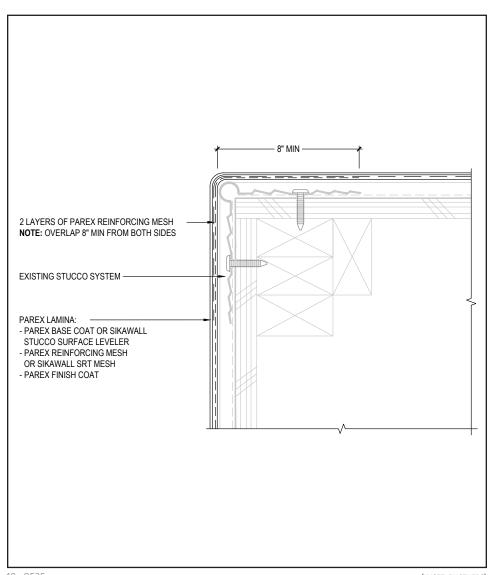

18 0525 (*NOTE: BY OTHERS)

- Install Sika materials in accordance with current installation instructions.
- Unsatisfactory conditions shall be reported to the General Contractor and corrected before the application of Sika products.





LIMITED WARRANTY NOTICE

Prior to each use of any product of Sika Corporation, its subsidiaries or affiliates ("SIKA"), the user must always read and follow the warnings and instructions on the product's most current product label, Product Data Sheet and Safety Data Sheet which are available at usa.sika.com/parex or by calling our Technical Service Department at +1 (800) 226-2424.

Nothing contained in any SIKA literature or materials relieves the user of the obligation to read and follow the warnings and instructions for each SIKA product as set forth in the current product label, Product Data Sheet and Safety Data Sheet prior to use of the SIKA product.

SIKA warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within the product's shelf life. User determines suitability of product for intended use and assumes all risks. User's and/ or buyer's sole remedy shall be limited to the purchase price or replacement of this product exclusive of any labor costs. NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS. Sale of SIKA products are subject to the Terms and Conditions of Sale which are available at usa.sika.com.

For the most current version of this literature, please visit our website at usa.sika.com/parex.

Sika Corporation
201 Polito Avenue
Lyndhurst, NJ 07071 USA
Customer Service +1 (800) 433-9517
Technical Service +1 (800) 226-2424
usa.sika.com/parex Rev May 2025

