

PRODUCT DATA SHEET

SikaRoof® VersiCell®

SUB-SURFACE DRAINAGE MODULES FOR DRAINAGE OF LANDSCAPE FEATURES

PRODUCT DESCRIPTION

SikaRoof® VersiCell® is a lightweight, high-strength drainage module manufactured from recycled polypropylene (PP) with cells 20 mm or 30 mm high, providing large internal void volumes for increased drainage discharge capacity.

SikaRoof® VersiCell® forms a hollow space between the structural element and the planting media, providing excellent drainage to prevent flooding of the landscape features.

USES

Drainage layer for intensive green roofs, podium landscapes, planter boxes and retaining wall backfill drainage systems in combination with a suitable geotextile as a filtration layer to prevent planting media from clogging the drainage layer.

PRODUCT INFORMATION

Packaging

SikaRoof® VersiCell® 3050	0.5 m x 0.5 m x 0.24 m (8 pcs / bundle)
SikaRoof® VersiCell® 3025	0.5 m x 0.25 m x 0.48 m (16 pcs / bundle)
SikaRoof® VersiCell® 2050	0.5 m x 0.25 m x 0.16 m (8 pcs / bundle)

CHARACTERISTICS / ADVANTAGES


- High compressive strength
- Smooth base, safe for direct laying onto waterproofing
- Interlocking modular design ensuring continuous drainage
- High discharge capacity
- Small surface perforations to prevent sagging of geotextile
- Resistant to biological attack by moulds and algae
- Chemically resistant to acids, alkalis, oils and soil chemicals
- Operates within a wide service temperature range

APPROVALS / STANDARDS

- Singapore Green Building Product (Leader) Cert. No. SGBP 3258
- Discharge Rate Testing in accordance to EWTCOI methodologies

Appearance / Color

Black and perforated square modules

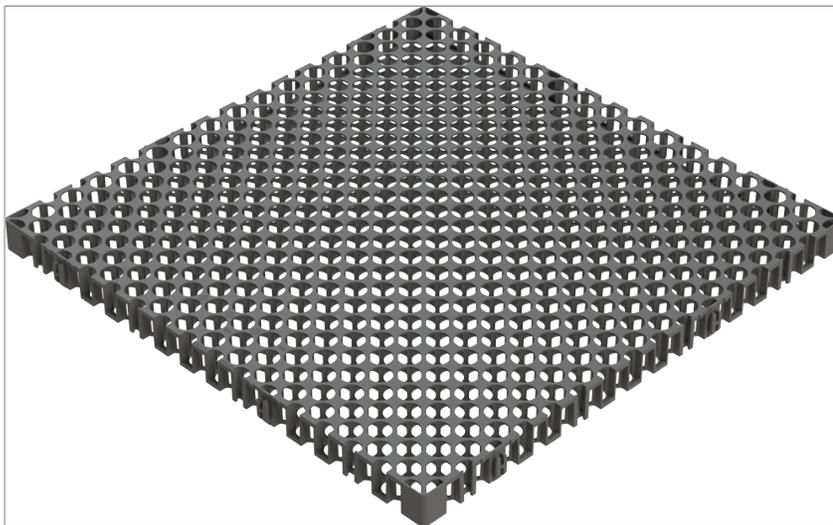

Shelf Life	No expiration date if the product is stored in accordance to the storage conditions as stated in this Product Data Sheet	
Storage Conditions	Bundles must be stored in their original packing, laid in a horizontal position, and under cool and dry conditions. The product must be protected from direct sunlight, rain, snow and ice, and any other elements	
Dimensions	SikaRoof® VersiCell® 3050	500 mm x 500 mm x 30 mm / pcs
	SikaRoof® VersiCell® 3025	500 mm x 250 mm x 30 mm / pcs
	SikaRoof® VersiCell® 2050	500 mm x 500 mm x 20 mm / pcs
Weight	SikaRoof® VersiCell® 3050	2.5 kg/m ²
	SikaRoof® VersiCell® 3025	2.5 kg/m ²
	SikaRoof® VersiCell® 2050	2.0 kg/m ²

TECHNICAL INFORMATION

Compressive Strength	800 kN/m ²	(ASTM D695-15)
Service Temperature	-30 °C to 80 °C	
Volume	Surface Void Area	Internal Void Volume
	62 %	95 %
Water flow capacity	Discharge Rate @ 1% Gradient	
	SikaRoof® VersiCell® 3050	16.5 L/m-s
	SikaRoof® VersiCell® 3025	16.5 L/m-s
	SikaRoof® VersiCell® 2050	13.0 L/m-s
Hole dimension	Perforation Size ≤ 20 mm Ø	

BASIS OF PRODUCT DATA

Results may differ based upon statistical variations depending upon mixing methods and equipment, temperature, application methods, test methods, actual site conditions and curing conditions.

LIMITATIONS

- SikaRoof® VersiCell® is not resistant to permanent weathering or prolonged UV exposure.
- When used in combination with Sarnafil® or Sikaplan® membranes, a separation layer such as S-Felt

- or Sika® Geotextile must be installed.
- For more information, please contact the Sika Sales Personnel.

ENVIRONMENTAL, HEALTH AND SAFETY

This product is an article as defined in article 3 of regulation (EC) No 1907/2006 (REACH). It contains no substances which are intended to be released from the article under normal or reasonably foreseeable conditions of use. A safety data sheet following article 31 of the same regulation is not needed to bring the product to the market, to transport or to use it. For safe use follow the instructions given in the product data sheet. Based on our current knowledge, this product does not contain SVHC (substances of very high concern) as listed in Annex XIV of the REACH regulation or on the candidate list published by the European Chemicals Agency in concentrations above 0,1 % (w/w).

APPLICATION INSTRUCTIONS

SUBSTRATE PREPARATION

Clean and sound surface shall have at least a wood float finish. All holes, joints, and cracks and honeycombs in concrete or masonry surfaces shall be filled with an approved grout and allowed to cure. High spots in concrete or masonry surfaces shall be cut off or ground down to prevent damage/puncture to the drainage module.

APPLICATION

SikaRoof® VersiCell® shall be loosely laid and interlocked with adjacent modules connected by proprietary in-built clips to form a continuous drainage layer without any mechanical fixing either on top of the waterproofing membrane or on top of the concrete surface. The installed drainage modules would then be covered with an approved or Sika® geotextile filter fabric before pouring the planting media over the modules.

LEGAL DISCLAIMER

- KEEP CONTAINER TIGHTLY CLOSED
- KEEP OUT OF REACH OF CHILDREN
- NOT FOR INTERNAL CONSUMPTION
- FOR INDUSTRIAL USE ONLY
- FOR PROFESSIONAL USE ONLY

Prior to each use of any product of Sika Corporation, its subsidiaries or affiliates ("SIKA"), the user must always read and follow the warnings and instructions on the product's most current product label, Product Data Sheet and Safety Data Sheet which are available at usa.sika.com or by calling SIKA's Technical Service Department at 1-800-933-7452. Nothing contained in any SIKA literature or materials relieves the user of the obligation to read and follow the warnings and instructions for each SIKA product as set forth in the current product label, Product Data Sheet and Safety Data Sheet prior to use of the SIKA product.

SIKA warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within the product's shelf life. User determines suitability of product for intended use and assumes all risks. User's and/or buyer's sole remedy shall be limited to the purchase price or replacement of this product exclusive of any labor costs. **NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.**

Sale of SIKA products are subject to the Terms and Conditions of Sale which are available at <https://usa.sika.com/en/about-us/terms-conditions-of-sale.html> or by calling 1-800-933-7452.

Sika Corporation

201 Polito Avenue
Lyndhurst, NJ 07071
Phone: +1-800-933-7452
Fax: +1-201-933-6225
usa.sika.com



Product Data Sheet

SikaRoof® VersiCell®
March 2026, Version 01.01
020945051450243670

SikaRoofVersiCell-en-US-(03-2026)-1-1.pdf

