

Sika® ComfortFloor Decorative Pro System

Seamless Low VOC Elastomeric Decorative Flooring for interior Concrete Surfaces finish of 240 - 320 mils

Description Sika ComfortFloor Decorative Pro is an ergonomic, sound dampening, low emission floor which is UV stable, aesthetically pleasing, easy to care for and to maintain while contributing to project LEED certification. ComfortFloor Decorative Pro is a 320 mil, seamless, fluid applied urethane floor system comprised of 100% solids urethane adhesive, 5mm recycled rubber pad of more than 80% recycled content, pigmented self leveling aliphatic urethane wear course, optional decorative vinyl flake and a wear resistant, clear water based urethane topcoat. Sika ComfortFloor contributes to sustainable building construction by using rapidly renewable resources as the raw material basis.

Where to Use Particularly suitable for all commercial and public buildings including healthcare facilities, schools, retail spaces, laboratories, nursing facilities, showrooms, lobbies, museums and office space. For interior use only.

Advantages

- Exceedingly low VOC emission
- Flexible and resilient
- Good acoustic isolation
- Good mechanical resistance
- Good UV resistance
- Reduces footfall sound
- Attractive colors available using pigmented UV stable topcoat
- Solvent Free
- Non shrinking after cure
- High strength
- Low maintenance and life cycle cost versus tile, sheet goods and carpet.
- Uses recycled rubber pad comprised of 86% recycled post consumer waste.
- Contains Rapidly Renewable raw material
- Tough, durable and seamless floor
- (Optional) Integral cove base and curbs
- Excellent adhesion in areas with heavy traffic and rolling loads such as carts, gurneys and wheelchairs.
- Use of this Sikafloor system can help contribute to project LEED certification.

Industrial Flooring




Sika®

System Build Up

Coating	Product Name	Typical Thickness (mils)
Adhesive	Sika ComfortFloor Adhesive	
Shockpad	Sika ComfortFloor Regupol 6015H Shockpad	157
Pore Sealer	Sika Comfort Porefiller	
Body Coat	Sikafloor 330	80
Color Sealer	Sikafloor 305W	8
Color Flakes	Random Decorative Flakes	
Top Coat / Clear Sealer	Sikafloor 304W	8
Optional 2nd Sealer Coat	Sikafloor 304W	8

System Build Up Step Diagram

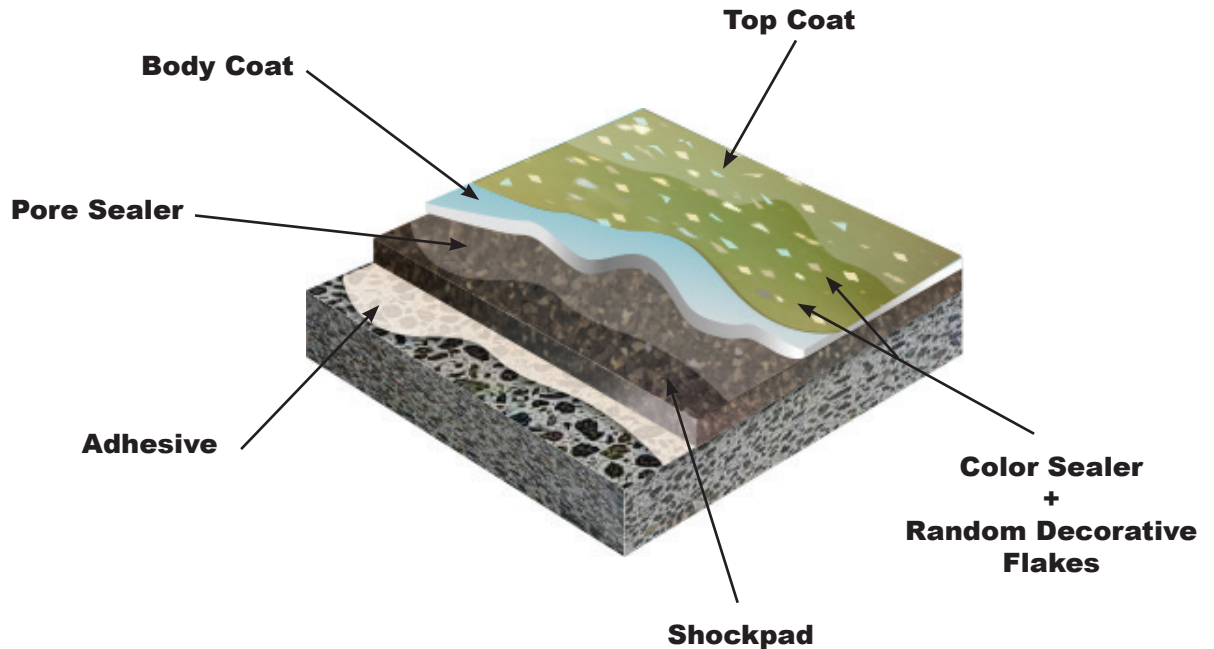

KEEP CONTAINER TIGHTLY CLOSED • KEEP OUT OF REACH OF CHILDREN • NOT FOR INTERNAL CONSUMPTION • FOR INDUSTRIAL USE ONLY

All information provided by Sika Corporation ("Sika") concerning Sika products, including but not limited to, any recommendations and advice relating to the application and use of Sika products, is given in good faith based on Sika's current experience and knowledge of its products when properly stored, handled and applied under normal conditions in accordance with Sika's instructions. In practice, the differences in materials, substrates, storage and handling conditions, actual site conditions and other factors outside of Sika's control are such that Sika assumes no liability for the provision of such information, advice, recommendations or instructions related to its products, nor shall any legal relationship be created by or arise from the provision of such information, advice, recommendations or instructions related to its products. The user of the Sika product(s) must test the product(s) for suitability for the intended application and purpose before proceeding with the full application of the product(s). Sika reserves the right to change the properties of its products without notice. All sales of Sika product(s) are subject to its current terms and conditions of sale which are available at <http://usa.sika.com/> or by calling 800-933-7452.

Prior to each use of any Sika product, the user must always read and follow the warnings and instructions on the product's most current Product Data Sheet, product label and Safety Data Sheet which are available online at <http://usa.sika.com> or by calling Sika's Technical Service Department at 800-933-7452. Nothing contained in any Sika materials relieves the user of the obligation to read and follow the warnings and instruction for each Sika product as set forth in the current Product Data Sheet, product label and Safety Data Sheet prior to product use.

Sika warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within shelf life. User determines suitability of product for intended use and assumes all risks. Buyer's sole remedy shall be limited to the purchase price or replacement of product exclusive of labor or cost of labor. **NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKASHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKASHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.**

Visit our website at www.sikafloorusa.com

1-800-933-SIKA NATIONWIDE

Regional Information and Sales Centers. For the location of your nearest Sika sales office, contact your regional center.

Sika Corporation
201 Polito Avenue
Lyndhurst, NJ 07071
Phone: 800-933-7452
Fax: 201-933-6225

Sika Canada Inc.
601 Delmar Avenue
Pointe Claire
Quebec H9R 4A9
Phone: 514-697-2610
Fax: 514-694-2792

Sika Mexicana S.A. de C.V.
Carretera Libre Celaya Km. 8.5
Fracc. Industrial Balvanera
Corregidora, Queretaro
C.P. 76920
Phone: 52 442 2385800
Fax: 52 442 2250537

