



# SikaTile®-895 Grout Sealer

## GROUT SEALER AND STAIN INHIBITOR

- Deep penetration of absorbent surfaces due to small molecular structure.
- Environmentally friendly, low VOC (less than 22 g/L).
- Reduction in water absorption reduces spalling due to freeze-thaw and efflorescence
- Penetrating treatment will not change appearance of the grout.

### Attributes Include:



BUILDING TRUST



# SikaTile®-895 Grout Sealer

## GROUT SEALER AND STAIN INHIBITOR

### WHERE TO USE

■ SikaTile®-895 Grout Sealer can be used to seal grout in both interior and exterior applications on both horizontal and vertical grout joints.

### HOW TO USE


■ Horizontal application: Apply a single flood coat using a Spray Bottle, sponge roller bottle, brush or roller applying sufficient material so the grout remains wet for 3 to 5 minutes. For maximum coverage, a wet-on-wet re-application within 2 minutes is recommended. After product has soaked in for 5-10 minutes, wipe excess from surface to avoid darkening or filming.

■ Vertical Application: Apply from top down using a Spray Bottle, sponge roller bottle, brush or roller. Flood grout until excess runs down 6 to 8 inches below spray or roller pattern. A wet-on-wet re-application within 5 minutes is recommended for maximum coverage.

### COVERAGE

Tile Size	Approximate Coverage*
4" x 4" Tile with 1/4" Joint (100 x 100 x 6 mm)	100 sq.ft. (9.3 m <sup>2</sup> )
12" x 12" Tile with 1/4" Joint (300 x 300 x 6 mm)	150 sq.ft. (13.9 m <sup>2</sup> )
18" x 18" Tile with 1/4" Joint (450 x 450 x 6 mm)	250 sq.ft. (23.2 m <sup>2</sup> )

\*Coverage shown is for estimating purposes only. Actual coverage may vary due to installation techniques, actual tile types, sizes, porosity of grout, and waste used on the job.

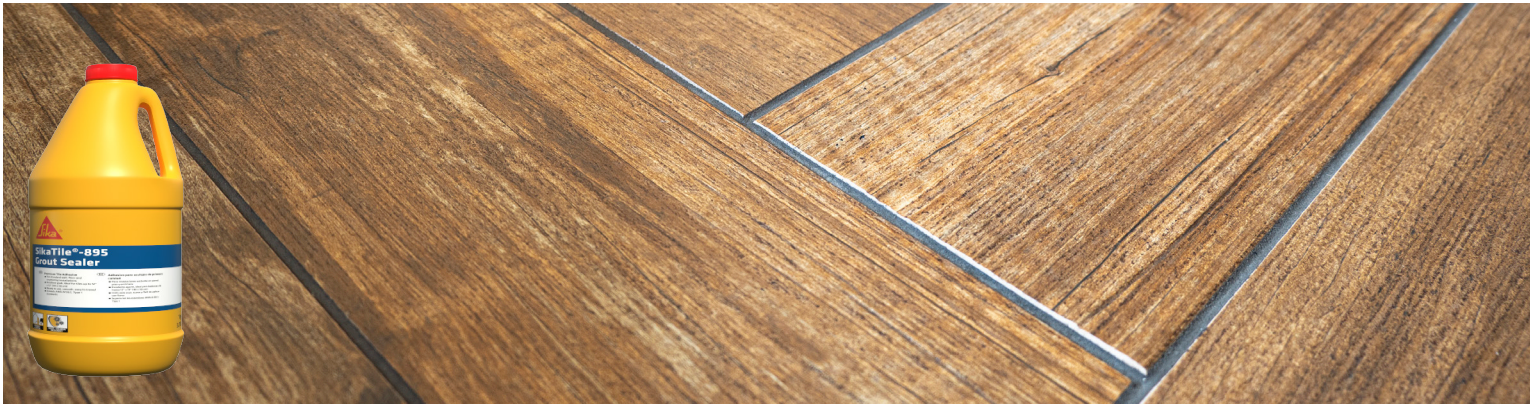

## FOR MORE INFORMATION:

Contact Sika: Phone 800.933.SIKA(7452) Website: [www.SikaTile.com](http://www.SikaTile.com)

**Sika Corporation**  
201 Polito Avenue  
Lyndhurst, NJ 07071  
Phone: 201-933-8800  
Fax: 201-933-6225



**BUILDING TRUST**

