


SikaLevel® Primer

CONCRETE PRIMER AND SEALER (FOR USE WITH SIKALEVEL® SELF-LEVELING UNDERLAYMENT)

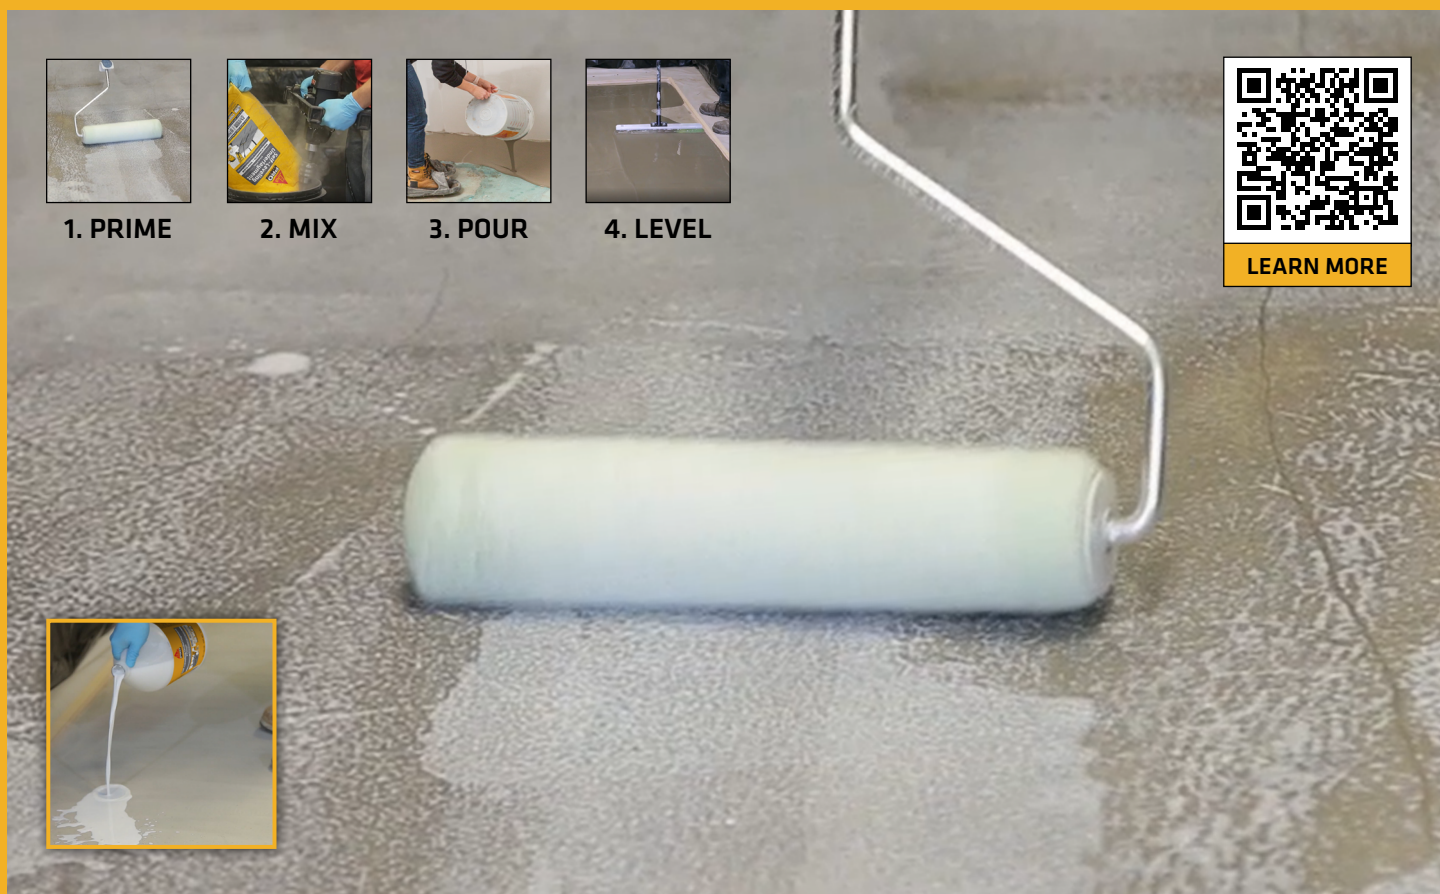

WHERE TO USE

- Priming and sealing of porous surfaces including concrete, cement and mortar substrates
- As an adhesion promoter for porous surfaces before leveling
- Cementitious surfaces enhancing the bond and integrity of the underlayment when applied onto porous substrates

ADVANTAGES

- **Ready-to-use** - No dilution required
- **Fast-drying** - Apply underlayment after 2 hrs.
- Prevents water loss from the underlayment into substrate
- Achieves excellent bond values
- Penetrates substrates to reduce outgassing
- **Yield:** ≈ 325 to $500 \text{ ft.}^2/\text{gal.}$ per coat

