

Sika Sarnafil

World Class Roofing and Waterproofing

ROOFING TECHNICAL BULLETIN

#09-13

To: Roofing Consultants
Authorized Roofing Applicators
Sika Sarnafil Sales Staff & Sales Representatives
Sika Sarnafil Regional Technical Staff
Sika Sarnafil Customer Service Staff
Sika Sarnafil Services Staff
Sika Sarnafil Marketing

From: Sika Sarnafil Technical Service Department

Date: July 30, 2013

Subject: Sarnafelt Barrier Flashing Application (reissued)

Referenced from Tech Bulletin #53 issued April 2, 1985

Sarnafelt is used as a barrier layer for flashing over contaminated or rough surfaces including but not limited to walls with tooled masonry joints.

The Sarnafelt is not to be used if flashing height is over 24" in height.


The Sarnafelt is to be installed as explained below:

1. Remove all loose or delaminated areas of existing flashing material or contamination.
2. Precut Sarnafelt to desired dimensions. Felt is to extend under the insulation a minimum of 6".
3. Apply a heavy coat of Sarnacol 2170 or 2170VC adhesive to the wall substrate.
4. While adhesive is still **wet**, install Sarnafelt into adhesive on the wall and roll into place to achieve full adhesion.
5. With a different clean roller, apply a medium coat of Sarnacol 2170 or 2170VC adhesive onto the underside of the flashing membrane.
6. While adhesive is still **wet**, install flashing membrane onto Sarnafelt and roll into place to achieve full adhesion.
7. Temporarily secure top of flashing membrane while adhesive is drying and waiting for permanent securement.
8. Membrane flashings must be secured at the top using acceptable termination detail.
9. The bottom of the Sarnafelt is secured simultaneously with the proper base wall securement.
10. Weld all laps as required.



Sika Sarnafil, A Division of Sika Corporation, 100 Dan Road, Canton, MA 02021
Tel. 800-451-2504, Fax: 781-828-5365, www.sikacorp.com

Sarnafil®

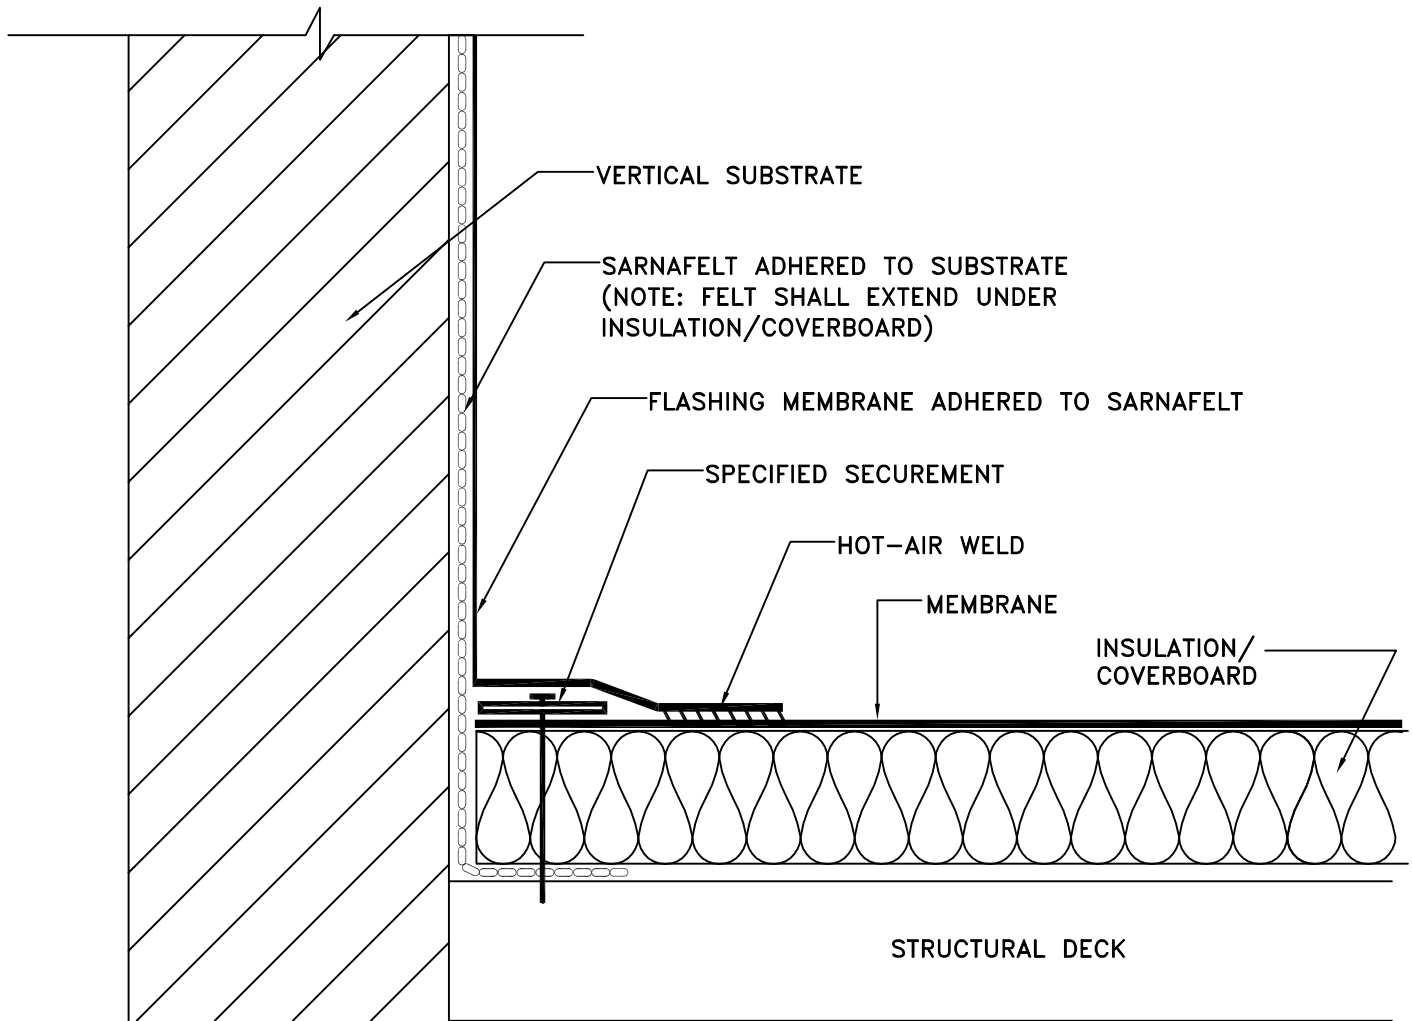

SARNAFELT BARRIER



Sarnafil
781-828-5400 sikacorp.com

JOB NAME:

XXX
XXX

SCALE: N.T.S.

DATE: 8/13

FILE NO.: XXX

DRW. NO.: XXX

AS A MEMBRANE MANUFACTURER, SIKA SARNAFIL, A DIVISION OF SIKA CORPORATION REVIEWS DETAILS PREPARED BY THE CONSULTANT, ARCHITECT AND/OR ENGINEER FOR A PROJECT SOLELY FOR THE PURPOSE OF DETERMINING IF A SIKA SARNAFIL WARRANTY MAY ISSUE FOR THE PROJECT. THIS REVIEW IS NOT TO BE CONSTRUED AS APPROVAL OF DETAILS BY SIKA SARNAFIL AND IS NOT BEING CONDUCTED IN LIEU OF SOUND ENGINEERING AND ARCHITECTURAL PRACTICES AND JUDGMENT AND SHOULD NOT BE RELIED UPON FOR THAT PURPOSE. SIKA CORPORATION ASSUMES NO LIABILITY WITH RESPECT TO THE DESIGN OF THE ROOFING OR WATERPROOFING SYSTEM. THE ARCHITECT, CONSULTANT AND/OR ENGINEER OR DESIGN PROFESSIONAL FOR A PARTICULAR PROJECT BEARS THE SOLE RESPONSIBILITY FOR THE DESIGN OF THE ROOFING OR WATERPROOFING SYSTEM, FOR THE PREPARATION AND APPROVAL OF THE DETAILS AND SHOP DRAWINGS, AND FOR DETERMINING THEIR SUITABILITY FOR A PARTICULAR PROJECT OR APPLICATION. WHILE SIKA SARNAFIL PROVIDES GENERAL INSTRUCTIONS FOR THE INSTALLATION OF ITS MEMBRANE AS WELL AS TRAINING FOR SIKA SARNAFIL AUTHORIZED APPLICATORS, THE MEANS AND METHODS USED BY THE CONTRACTOR FOR SURFACE PREPARATION AS WELL AS THE MEANS AND METHODS EMPLOYED BY THE CONTRACTOR IN THE INSTALLATION OF THE SIKA SARNAFIL MEMBRANE ARE THE RESPONSIBILITY OF THE CONTRACTOR.