

SYSTEM DATA SHEET

Sikafloor® PurCem® SLB

SELF-LEVELING POLYURETHANE CEMENTITIOUS MORTAR ENGINEERED WITH
SIKAFLOOR -24 NA PURCEM @ 80 -160 mils (2 - 4 mm)

PRODUCT DESCRIPTION

Sikafloor® PurCem® SLB is a state of the art, phthalate-free, water dispersed polyurethane based/cement and aggregate screed. It is designed to be installed as a self leveling floor topping that provides an easy-to-clean, slip resistance and is typically used for general, industrial and commercial applications. Sikafloor® PurCem® SLB represents superior polyurethane/cement technology, combining easier application, resistance to blistering and improved performance. Sikafloor® PurCem® SLB typically installed at 80 - 160 mils (2 - 4 mm).

USES

Sikafloor® PurCem® SLB may only be used by experienced professionals.

- Typically used in areas of medium to heavy loading and abrasion, self-leveling layer in general industrial areas, including warehouses, production facilities, laboratories and workshops, either with or without a Sikafloor® sealer top coat.
- As broadcast receiving coat, slip-resistant screed in industrial and commercial environments, with a suitable UV-stable Sikafloor sealer for retention of aesthetics.
- When used as a base for UEF system, total thickness must be 1/8" (125 mils).


CHARACTERISTICS / ADVANTAGES

- Can be applied on green concrete, typically 7-10 days. Full 28 days cure time is not necessary.
- Can be applied over partially cured concrete substrates (> 4% mass (pbw –part by weight) as measured with Tramex® CME/CMExpert type concrete moisture meter surface moisture).
- Can be applied to concrete substrates where <100 % relative humidity is measured as per ASTM F2170.
- Resists a very wide range of organic and inorganic acids, alkalis, amines, salts and solvents. Consult Sika Technical Service for full details. Refer to the Sikafloor - 24 NA Purcem Chemical Resistance Chart.
- Similar coefficient of thermal expansion to concrete allowing movement with the substrate through normal thermal cycling. It will perform and retain its physical characteristics through a wide temperature range from -40 °F (-40 °C) up to 248 °F (120 °C).
- Steam cleanable at 80 to 160 mils (2 to 4 mm) thickness.
- Non-tainting, odorless.
- Behaves plastically under impact / deforms but will not crack or debond.
- High abrasion qualities result from its aggregate structure.
- Extra Expansion joints are not necessary; maintain and extend existing expansion joints up through the Sikafloor PurCem Flooring System.
- Minimal maintenance costs, superior life cycle cost advantage versus tile.
- Meets the requirements of USDA for use in food plants.

SYSTEM INFORMATION

System Structure

Sikafloor® PurCem® SLB ~ 80 - 160 mils (2 - 4 mm)

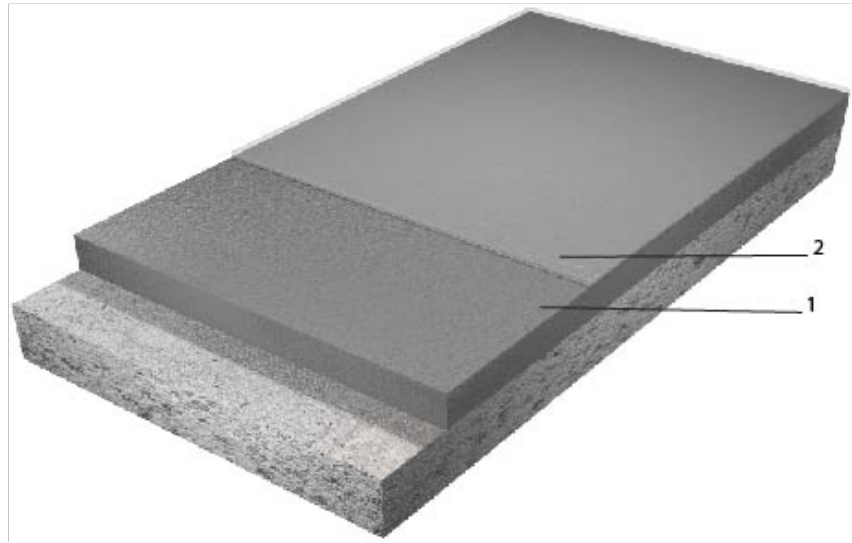

Description	Products	Thickness mils
1. Slurry	Sikafloor®-24 NA PurCem* +	80 -160
2. Top Coat	Sikafloor®-508 Aggregate Sikafloor®-31 NA PurCem*	15 - 20
Options		
Primers	Sikafloor®-2570	3 - 5
	Sikafloor®-31 NA PurCem* Sikafloor®-511 +	15 - 20 15 - 20
Alternate Top Coats	Sikafloor®-SCO Color Additive	16 -18
	Sikafloor®-264 Sikafloor®-316 N +	4 - 6
2 nd Top Coat	Sikafloor®-SCO Color Additive	

* To reduce cure time use Sikafloor®- PurCem® Fast Set

** Sikafloor-511 would be an alternate top coat to replace Sikafloor®-31 NA PurCem for superior UV resistance, increased chemical resistance and color stability

*** Sikafloor-264 would be an alternate top coat to replace Sikafloor®-31 NA PurCem for glossy aesthetic finish.

****Sikafloor-316 N would be an optional 2nd top coat on top of Sikafloor®-511 and Sikafloor-264 for increased chemical and abrasion resistance

Color Available in standard PurCem colors

Nominal thickness 80 -160 mils (2 - 4 mm)

Minimum thickness 80 mils (2 mm)

Volatile organic compound (VOC) content Please refer to the individual Product Data Sheets.

TECHNICAL INFORMATION

Water Absorption	0.10%	ASTM C413 at 73°F (23°C) and 50% R.H
Shore D Hardness	83	ASTM D2240 at 73°F (23°C) and 50% R.H
Abrasion Resistance	CS-17/1000 cycles/1000 g -0.07 g loss H-22/1000 cycles/1000 g -0.24 g loss	ASTM D4060 73°F (23°C) and 50% R.H
Indentation	~ 0%	MIL -PRF -24613 at 73°F (23°C) and 50% R.H
Compressive Strength	6,961psi (48 MPa) 28 days	ASTM 579 73°F (23°C) and 50% R.H
Tensile Strength	1,290 psi (8.9 MPa)	ASTM C307 at 73°F (23°C) and 50% R.H
Flexural Strength	2,726 psi (18.8 MPa)	ASTM C580 at 73°F (23°C) and 50% R.H
Chemical Resistance	Please consult Sikafloor Technical Services.	
Microbiological Resistance	Resistance to Fungi Growth Rated 0 (no growth) Resistance to Mold Growth Rated 10 (highest resistance)	ASTM G21 at 73°F (23°C) and 50% R.H ASTM D3273 at 73°F (23°C) and 50% R.H
Thermal Conductivity	Pass	ASTM C884 at 73°F (23°C) and 50% R.H
Coefficient of Friction	3.02 x 10 ⁵ in/in/°F (5.43 x 10 ⁵ mm/mm/°C)	ASTM D696 at 73°F (23°C) and 50% R.H

APPLICATION INFORMATION

Coverage

Description	Products	Approximates Sq.Ft./kit
1. Slurry	Sikafloor®-24 NA PurCem*	107@80 mils
	Sikafloor®-508 Aggregate	0.15 Lb/sq.ft
2. Top Coat	Sikafloor®-31 NA PurCem*	224@15 mils
Options		
Primers	Sikafloor®-2570	2,667@3 mils
	Sikafloor®-31 NA PurCem*	244 @15 mils
	Sikafloor®-511	972@15 mils
Alternate Top Coat	Sikafloor®-SCO color Additive	3 quarts/ 8.33 gallon
	Sikafloor®-264	450@16mils
2nd Top Coats	Sikafloor®-316 N	2,400@4mils
	Sikafloor®-SCO color Additive	2 quarts per 5.5 gallon kit

*Sikafloor®- PurCem Fast Set Sq.Ft coverage per kit is equivalent to standard Sikafloor®- PurCem.

Ambient Air Temperature	Minimum/Maximum 40°/100°F (4°/30°C)
Substrate Temperature	Minimum/Maximum 40°/100°F (4°/30°C).
Pot Life	Please refer to the individual Product Data Sheet
Waiting / Recoat Times	Please refer to the individual Product Data Sheet

PRODUCT INFORMATION

Packaging	Please refer to the individual Product Data Sheet
Shelf Life	Please refer to the individual Product Data Sheet
Storage Conditions	Please refer to the individual Product Data Sheet

BASIS OF PRODUCT DATA

Results may differ based upon statistical variations depending upon mixing methods and equipment, temperature, application methods, test methods, actual site conditions and curing conditions.

LIMITATIONS

Please refer to the individual Product Data Sheet for limitations.

ENVIRONMENTAL, HEALTH AND SAFETY

For further information and advice regarding transportation, handling, storage and disposal of chemical products, user should refer to the actual Safety Data Sheets containing physical, environmental, toxicological and other safety related data. User must read the current actual Safety Data Sheets before using any products. In case of an emergency, call CHEMTREC at 1-800-424-9300, International 703-527-3887.

APPLICATION INSTRUCTIONS

SUBSTRATE PREPARATION

Concrete surfaces must be clean and sound. Remove all dust, dirt, existing paint films, efflorescence, exudates, laitance, form oils, hydraulic or fuel oils, brake fluid, grease, fungus, mildew, biological residues or any other contaminants which may prohibit a good bond.

Prepare the surface by any appropriate mechanical means, in order to achieve a profile equivalent to ICRI - CSP 3-6. The compressive strength of the concrete substrate should be at least 3,625 psi (25 MPa) at 28 days and a minimum of 218 psi (1.5 MPa) in tension at the time of application.

Repairs to cementitious substrates, filling of blowholes, leveling of irregularities, etc. should be carried out using an appropriate Sika profiling mortar. Contact Sika Technical Service for a recommendation.

Edge Terminations

All free edges of a Sikafloor PurCem floor, whether at the perimeter, along gutters or at drains, require extra anchorage to distribute mechanical and thermal stresses. This is best achieved by forming or cutting grooves in the concrete. Grooves should have a depth and width of 2 times thickness of the Sikafloor PurCem floor. Refer to the edge details provided at <http://usa.sika.com>.

If necessary, protect all free edges with mechanically attached metal strips. Do not feather edge, always turn into an anchoring groove.

Expansion Joints

Should be provided in the substrates at the intersection of dissimilar materials. Isolate areas subject to thermal stresses, vibration movements, or around load-bearing columns and at vessel sealing rings. Refer to details provided at <http://usa.sika.com>.

MIXING

Please refer to the individual Product Data Sheet for each component.

APPLICATION

Please refer to the individual Product Data Sheet for each component.

OTHER RESTRICTIONS

See Legal Disclaimer.

LEGAL DISCLAIMER

- KEEP CONTAINER TIGHTLY CLOSED
- KEEP OUT OF REACH OF CHILDREN
- NOT FOR INTERNAL CONSUMPTION
- FOR INDUSTRIAL USE ONLY
- FOR PROFESSIONAL USE ONLY

Prior to each use of any product of Sika Corporation, its subsidiaries or affiliates ("SIKA"), the user must always read and follow the warnings and instructions on the product's most current product label, Product Data Sheet and Safety Data Sheet which are available at usa.sika.com or by calling SIKA's Technical Service Department at 1-800-933-7452. Nothing contained in any SIKA literature or materials relieves the user of the obligation to read and follow the warnings and instructions for each SIKA product as set forth in the current product label, Product Data Sheet and Safety Data Sheet prior to use of the SIKA product.

SIKA warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within the product's shelf life. User determines suitability of product for intended use and assumes all risks. User's and/or buyer's sole remedy shall be limited to the purchase price or replacement of this product exclusive of any labor costs. **NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.**

Sale of SIKA products are subject to the Terms and Conditions of Sale which are available at <https://usa.sika.com/en/group/SikaCorp/termsandconditions.html> or by calling 1-800-933-7452.

Sika Corporation

201 Polito Avenue
Lyndhurst, NJ 07071
Phone: +1-800-933-7452
Fax: +1-201-933-6225
usa.sika.com

Sika Mexicana S.A. de C.V.

Carretera Libre Celaya Km. 8.5
Fracc. Industrial Balvanera
Corregidora, Queretaro
C.P. 76920
Phone: 52 442 2385800
Fax: 52 442 2250537



System Data Sheet

Sikafloor® PurCem® SLB
March 2021, Version 01.05
02081490000000031

SikafloorPurCemSLB-en-US-(03-2021)-1-5.pdf

