



Sikagard® 7600 HG / VG

TWO-COMPONENT POLYURETHANE, BITUMEN MODIFIED WATERPROOFING CHEMICAL RESISTANT MEMBRANE

- Sikagard 7600 HG - roller grade
- Sikagard 7600 VG - trowel grade
- Economical and easy to apply system
- Flexible and chemical resistant system
- Meets California VOC and AQMD requirements, including SCAQMD Areas
- ANSI / NSF 61 approved for contact with potable water

Available in
4.5 gallon pails (A and B component)



BUILDING TRUST



Sikagard® 7600 HG / VG

CHEMICAL RESISTANT FLEXIBLE WATERPROOFING

APPLICATIONS

- Flexible waterproofing membrane
- WWTP protective coating
- Tank Liner
- Pond Liner
- Cooling Tower Liner
- Detailing Solution for SikaProof A+12 Membrane

ADVANTAGES


- Seamless system which bridges cracks and joints
- Abrasion resistant
- UV stable
- Impervious to water and aqueous chemicals

TYPICAL DATA*

@75°F (24°C) and 50% R.H.

- **Shelf Life:** One year from date of manufacture in original, factory-sealed containers
- **Storage Conditions:** Store indoors at a temperature between 60-95°F (15-35°C)
- **Colors:** Component A: Transparent / Component B: Black
- **Total Volume Solids (ASTM D-2697):** 89 ± 2%
- **Total Volume Weight (ASTM D-236):** 95 ± 2%
- **VOC Content (ASTM D-2369-81):** <50 g/L
- **Tensile Strength (ASTM D-412):** 1000 ± 50 psi 5.86 Mpa ± 0.3 Mpa
- **Elongation at Break (ASTM D-412):** 450% ± 50%
- **Tear Strength (Die C, ASTM D-624):** 180 ± 50 pli
- **Hardness (ASTM D-2240):** 60 ± 5 Shore A
- **Coverage:** 25 sf/gal results in standard system 2x30 wet mills (2 coats)
- **Pot life:** Sikagard 7600HG- 30 min. / Sikagard 7600 VG- 20 min.
- **Adhesion to Concrete (Dry) Elcometer:** 365 psi
- **Permeability to Water Vapor (ASTM D751):** 0.03 perms

* For up to date and accurate information, please consult the current Product Data Sheet at www.usa.sika.com.

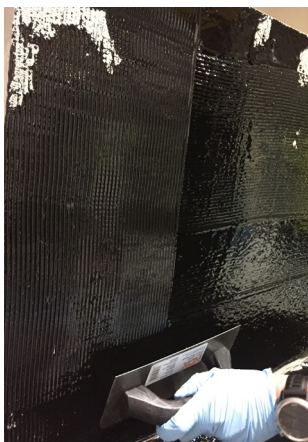

FOR MORE INFORMATION:

Contact Sika: Phone 800.933.SIKA(7452) Website: www.usa.sika.com

Sika Corporation

201 Polito Avenue
Lyndhurst, NJ 07071
Phone: 201-933-8800
Fax: 201-933-6225

BUILDING TRUST

