

SIKAWALL®
STUCCO PRODUCT CATALOG

BUILDING TRUST

WHO WE ARE

SIKA® STUCCO, FORMERLY LAHABRA® STUCCO, PRODUCTS HAVE DELIVERED ADVANCED STUCCO SOLUTIONS TO THE INDUSTRY FOR OVER A CENTURY. Whether enhanced moisture protection or reduced cracking is required, SikaWall® offers reliable solutions supported by Sika's stucco experts, backed by a single source warranty. SikaWall Stucco products are manufactured in the US in controlled environments to ensure uniformity from bag to bag and batch to batch.





STUCCO SOLUTIONS SINCE 1926

Since its founding in 1926, LaHabra has built a reputation for delivering high-quality stucco solutions and services. Sika completed the acquisition of LaHabra® in 2019, maintaining the established products and systems valued by customers now under SikaWall.

SIKAWALL ACRYLIC AND CEMENT STUCCO FINISHES:

UNLIKE PAINT, SIKAWALL STUCCO FINISHES PROVIDE A THICK LAYER OF COLOR THAT IS AN INTEGRAL PART OF THE FINISH.

FINISH THE JOB WITH SIKAWALL STUCCO FINISHES & COATINGS

Sika is pleased to offer both SikaWall® Perma-Flex 100% Acrylic Finish and cementitious Premium Stucco Finish. By offering a complete selection of finishes, as well as stucco base coats and related products, Sika assures customers of the quality and convenience that can only come from a single source manufacturer.

ALL SIKAWALL STUCCO FINISHES:

- Available in a wide variety of colors
- Offer superior quality and performance, saving labor costs and scaffolding time
- Exceed industry standards
- Vapor-permeable, allowing the passage of water vapor

ACRYLIC FINISHES & COATINGS

SikaWall Acrylic Finishes are 100% acrylic, flexible, vapor-permeable finishes that provide long-lasting, consistent color for stucco and CI systems:

- Incorporate advanced dirt pickup resistance technology that keeps walls looking cleaner longer
- Less prone to cracking
- Give architectural details greater definition
- Moisture-resistant and vapor-permeable
- Easy to apply and achieve a high degree of color consistency

PORTLAND CEMENT FINISHES

SikaWall Premium Stucco Finishes are a factory blend of sand, portland cement, lime, iron oxide pigments and proprietary modifiers that enhance strength, workability, durability and weather-resistance. Premium Stucco is available in a pre-blended color mix or in a stucco base with color pack.

- Available in 48 standard colors
- Can be applied in a variety of textures over portland cement base coats
- Easy to apply, repair and clean up and require little or no maintenance after application
- Impervious to termites, rot and fungus
- Offer vapor-permeability, color permanency and uniformity
- Provides a pleasing finish appearance with good value, low life-cycle and/or initial material costs

SCAN THE ➤ QR CODE FOR PRODUCT DATA SHEETS

TABLE OF CONTENTS

STUCCO BASE COATS 4
BASE COATS AND ADHESIVES 5
BONDING AGENTS & ADMIXTURES 5
CEMENT STUCCO FINISHES 6
CEMENT STUCCO COATINGS 7
ACRYLIC STUCCO FINISHES 7
ACRYLIC COATINGS 8
PRIMERS 8
MESH AND LATH 9
SEALERS 9
AIR & WATER RESISTIVE BARRIERS 10
DRAINAGE MAT AND ACCESSORIES 11

STUCCO BASE COATS		SIZE	PACK	COVERAGE (ft^2)
	**SikaWall Fastwall Stucco Base Concentrate** A factory controlled high-quality blend of portland cement, lime, fibers and proprietary additives that conforms to ASTM C926. ASTM C897 or ASTM C144 sand is added at the job site. Can be installed up to 1/2 in. (12.7mm) in one application.	80 lbs	35/pallet	At 3/8": 75–90 At 1/2": 60–72
	**SikaWall Fastwall Stucco Base Sanded** A factory controlled high-quality blend of portland cement, lime, fibers, proprietary additives and ASTM C144 sand that conforms to ASTM C926. Factory-blended mix that requires only the addition of water. Can be installed up to 1/2 in. (12.7mm) in one application.	80 lbs	35/pallet	At 3/8": 20–25 At 1/2": 15–19
	**SikaWall Fastwall Stucco Base Concentrate Pump Grade** A factory controlled high-quality blend of portland cement, lime, fibers and proprietary additives that conforms to ASTM C926 which is designed as a replacement to job-site mixed scratch and brown basecoats. Sand conforming to ASTM C 926 requirements is added at job site. Designed for both spray and trowel application.	80 lbs	35/pallet	At 3/8": 20–25 At 1/2": 15–19
	**SikaWall Fiber-47 Scratch & Brown Concentrate** A factory controlled high-quality blend of portland cement, lime, fibers and proprietary additives that conforms to ASTM C926 is designed as a replacement to job-site mixed scratch and brown base coats. ASTM C897 or ASTM C144 sand is added at job site.	80 lbs	35/pallet	At 3/8": 100–140 At 3/4": 50–70
	**SikaWall Fiber-47 Scratch & Brown Sanded** A factory controlled high-quality blend of portland cement, lime, fibers, proprietary additives and ASTM C144 sand that conforms to ASTM C926 is designed as a replacement to job-site mixed scratch and brown base coats.	80 lbs	35/pallet	At 3/8": 20–24 At 3/4": 10–12

STUCCO BASE COATS (CONTINUED)	SIZE	PACK	COVERAGE (ft^2)
 **SikaWall Fiber-47 Scratch & Brown 690 Sanded** **Formerly BMI 690** SikaWall Fiber-47 Scratch & Brown 690 Sanded is a premium pre-blended cement-lime-sand mixture that has been specially formulated for the scratch and brown coat. This factory blended product assures consistent quality throughout the project.	80 lbs	35/pallet	625–750

BASE COATS AND ADHESIVES	SIZE	PACK	COVERAGE (ft^2)
 **SikaWall Poly-Bond** SikaWall Poly-Bond is for use as a base coat and adhesive for expanded polystrene foam shapes. These shapes are typically used as exterior decorative trim such as pop-outs, plant-ons, cornices and quoins. Available in 2 textures: Coarse (for maximum keying strength) and Fine (for complex architectural details).	50 lbs	56/pallet	50–70
 **SikaWall-520 Stucco Level Coat** SikaWall-520 Stucco Level Coat is a surface leveler and mesh adhesive for use in reducing cracking in stucco systems. Bonds to stucco brown coat. Can be applied in a thin layer. Applied without the addition of cement. Mixed on site with water only. Excellent workability.	50 lbs	56/pallet	65
 **SikaWall Stucco BaseX** Polymer-modified base coat and anti-fracture membrane for smooth-troweled finishes, available in #20 and #30 grit. When used with mesh, BaseX reduces cracking and produces a smooth base for smooth trowel finishes such as SikaWall Santa Barbara Mission Finish.	90 lbs	30/pallet	80–100
 **SikaWall Carvable Mortar** SikaWall Carvable Mortar is an architectural mortar is a polymer modified mortar used to create shapes, relief and sculpted structures	80 lbs	35/pallet	180 at 1/8" thick

BASE COATS AND ADHESIVES (CONTINUED)	SIZE	PACK	COVERAGE (ft^2)
 **SikaWall-1000 MaxGrip Veneer Adhesive** For use to adhere thin brick veneer, natural and manufactured stone, and tile with Sika adhered CI drainage systems, non insulated stucco and cement board systems.	50 lbs	56/pallet	As Skim Coat: 90 ft^2 Think Brick Adhesive: 34 – 46 ft^2 at 3/16" – 1/4" Stone Adhesive: 23 – 34 ft^2 at 1/4" – 3/8"

BONDING AGENTS & ADMIXTURES	SIZE	PACK	COVERAGE (ft^2)
 **SikaWall-73 Adacryl Admix & Bonder** 100% acrylic emulsion designed for use with for portland cement based products. High-performance acrylic polymer bonding agent. Admixture in portland cement based mixes.	5 gal 1 gal	36/pallet 6/case	1000 – 1500 200 – 300

CEMENT STUCCO FINISHES	SIZE	PACK	COVERAGE (ft^2)
 **SikaWall Exterior Stucco Color Coat (Base 100 & 200)** SikaWall Exterior Stucco Color Coat provides a lasting, durable color finish over SikaWall Fiber-47 Scratch & Brown, SikaWall Fastwall Stucco Base, SikaWall-520 Stucco Level Coat, SikaWall BaseX or portland cement exterior plaster brown coat. It is integrally colored with fade-resistant pigments, and is economical with low maintenance. Available in Base 100 and 200 and 16/20 and 20/30 aggregates for use with SikaWall Color Packs.	90 lbs	30/pallet	Float FInish: 135-180 Light Spanish Texture: 90-135 Machine Dash: 72-108
 **SikaWall Santa Barbara Mission Finish** SikaWall Santa Barbara Mission Finish provides a lasting, durable smooth Santa Barbara mission-style stucco finish over SikaWall Fiber-47 Scratch & Brown, SikaWall Fastwall Stucco Base, SikaWall-520 Stucco Level Coat, SikaWall BaseX or portland cement exterior plaster brown coat. It is integrally colored with fade-resistant pigments, and is economical with low maintenance. Available in premix or tint Base 100 and 200 for use with SikaWall Color Packs.	90 lbs	30/pallet	90 – 135
 **SikaWall Paint Grade Stucco Finish** SikaWall Paint Grade Stucco Finish provides a lasting, durable finish over SikaWall Fiber-47 Scratch & Brown, SikaWall Fastwall Stucco Base, SikaWall-520 Stucco Level Coat, SikaWall BaseX or portland cement exterior plaster brown coat. Product is available in 16/20 and 20/30. Requires a coating of Allegro II or other paint to achieve final desired color.	90 lbs	30/pallet	90 – 180 based on technique


CEMENT STUCCO FINISHES (CONTINUED)	SIZE	PACK	COVERAGE (ft^2)
 **SikaWall Color Packs** SikaWall Color Packs are specifically designed for use with SikaWall Exterior Stucco Color Coat. Special colors are available upon request.	16 oz	15/case	N/A

CEMENT COATINGS	SIZE	PACK	COVERAGE (ft^2)
 **SikaWall Fog Coat** SikaWall Fog Coat provides cost-effective, durable and long-lasting colored fog coating for existing stucco. It is easy to apply and specifically designed to refresh the color of stucco. A decorative coating for portland cement based stucco walls and ceilings.	25 lbs	56/pallet	800–1000
 **SikaWall Allegro II Cement Coating** SikaWall Allegro II Cement Coating provides a cost-effective, durable and long-lasting colored coating that can be applied to portland cement surfaces such as: Stucco, Paint grade stucco, Concrete block/Concrete masonry unit (CMU) and Precast concrete. Allegro II is recommended for cement stucco finish such as as SikaWall Paint Grade and SikaWall Santa Barbara Mission Finish.	12 lbs	120/pallet	320–480

ACRYLIC FINISHES	SIZE	PACK	COVERAGE (ft^2)
 **SikaWall Perma-Flex Stucco Acrylic** A 100% acrylic-based textured finish for stucco only. Made with Dirt Pick-Up Resistance meaning the surface of the finish hardens and does not soften again under heat. The non-tacky surface provides high resistance to accumulation of dirt, mold and pollutants. The finish is integrally colored with high quality pigments. Available in three textures: F1.0, M1.5, and T0.5.	5 gal	36/pallet	F1.0: 150–165 M1.5: 110–125 T0.5: 280–300
 **SikaWall Perma-Finish Stucco Acrylic** A 100% acrylic-based textured finish for stucco only. Made with Dirt Pick-Up Resistance meaning the surface of the finish hardens and does not soften again under heat. The non tacky surface provides high resistance to accumulation of dirt, mold and pollutants. Perma-Finish has increased flexibility, weathering, and longevity compared to Perma-Flex. The finish is integrally colored with high quality pigments or in four tint bases. Available in four textures: F1.0, M1.5, R1.5, T0.5	5 gal	36/pallet	F1.0: 145–155 M1.5: 105–115 R1.5: 130–140 T0.5: 182–187 (2 coats)
SikaWall Color Bottles Color Bottles are specifically designed for use with SikaWall Acrylic Finishes. Special colors are available upon request.	4 oz	24/case	N/A

ACRYLIC COATINGS	SIZE	PACK	COVERAGE (ft^2)
 **SikaWall-4080 Color Advance Coating** SikaWall Color Advance is a 100% acrylic-based coating. Designed for spray, roller or brush-application over Sika Facades systems with minimum change in finish texture or sheen.	5 gal	36/pallet	750 – 1200
 **SikaWall-4090 Elastomeric Coating** Factory-mixed, 100% acrylic-based smooth elastomeric coating that provides excellent flexibility and weatherability. SikaWall 4090 Elastomeric Coating can bridge cracks with over 300% elongation. Intended for use as a coating on exterior wall surfaces such as concrete, stucco, unit masonry or cementitious, acrylic and elastomeric textured finishes.	5 gal	36/pallet	250 (32 mils wet) Two coats are recommended
 **SikaWall®-4110 Tersus Hydrophobic Coating** A 100% modified acrylic coating designed to provide both water repellence and enhanced resistance to environmental soiling. The water repellent properties of the coating make the surface hydrophobic as well as more resistant to mold and mildew. Size: 5 gal Pack: 36/pallet Coverage: 900 – 1,400 at 5 – 8 wet mils	5 gal	36/pallet	900 - 1,400 at 5 – 8 wet mills

PRIMERS	SIZE	PACK	COVERAGE (ft^2)
 **SikaWall®-15 Tinted Primer** A 100% acrylic-based primer for use with Sika Facades textured finishes to help alleviate substrate read through, aids with color uniformity and finish shadowing. Can be used with Stucco or EIFS.	5 gal	36/pallet	750 – 1,250
 **SikaWall-10 Stucco Prime** A 100% acrylic-based primer for use with Sika Facades textured finishes. It helps alleviate substrate readthrough, aids with color uniformity and reduces finish shadowing.	5 gal	36/pallet	750 – 1,250

MESH AND LATH		SIZE	PACK	COVERAGE (ft^2)
	**PAREX 355 Standard Mesh –4.2 oz.** 4.2 oz. fiberglass 38 in. (96.5 cm) wide mesh. Is highly flexible for full walls or details. Is alkali resistant. Standard reinforcement of Parex USA CI walls for impact resistance and details. Also used in Parex USA Krak-Shield.	38"x 150'	4/case	475
	**SikaWall-9000 SRT Mesh** A woven fiberglass mesh with high mechanical strength and dimensional stability. For Sika stucco and stucco resurfacing systems and conventional stucco for improved crack resistance. Not for use with EIFS.	38"x 150'	2/case	237
	**SikaWall-900 Permalath 1000** Permalath 1000 is a light weight glass fiber reinforcing lath designed for use with one and three coat 1/2" to 7/8" thick stucco system. Permalath 1000 is non-metallic, it will not rust and has no sharp edges making it easier and safer to cut and handle. It can be applied horizontally or vertically.	38"x 150'	2/case	475

SEALERS		SIZE	PACK	COVERAGE (ft^2)
	**SikaWall®-4905 Protect** SikaWall®-4905 Protect is an opaque and non-flammable liquid water repellent that dries clear. It is used to protect stucco, masonry and cured concrete from water.	5 gal	36/pallet	625–750
	**SikaWall®-4910 Clear Seal** SikaWall Clear Seal is designed to be used on any Sika Facades standard textured acrylic finishes, Sika Facades Wood Grain Effect finish, and SikaWall-4080 Color Advance coating.	5 gal	36/pallet	160–200

AIR & WATER-RESISTIVE BARRIERS	SIZE	PACK	COVERAGE (ft^2)
 **Parex WeatherSeal Spray & Roll-On** A 100% acrylic elastomeric waterproof membrane and air barrier which can be either rolled, brushed, or spray applied.	5 gal	36/pallet	Single Coat 400–500
 **Parex WeatherSeal Trowel-On WG** A 100% acrylic based, trowelable water-resistive barrier membrane. Designed for use as water-resistive barrier behind exterior claddings.	5 gal	36/pallet	Single Coat 140–160
 **PAREX WeatherBlock VB AB** A Class I 100% Acrylic co-polymer fast drying vapor barrier, elastomeric waterproof and air barrier coating which can be either rolled, brushed, or spray applied.	5 gal	36/pallet	Single Coat 200–250
 **Sika Thoroseal-581** Sika Thoroseal-581 is a Portland cement-based coatingfor concrete and masonry that resists both air infiltration and positive as well as negative hydrostatic pressure. Must be mixed with Sika Thoroseal® Acryl 60 available in 1 or 5 gallons.	50 lbs	56/pallet	225
 **SikaWall-80 MaxFlash** SikaWall-80 MaxFlash liquid flashing and joint filler is used to prepare and seal exterior wall rough openings and detail joints as part of the WeatherTech air and water barrier system.	20 oz. Tube	20/case	Sheathing Joint: 35–60 LF at 20 mils Rough Openings: 12–20 ft^2 at 20 mils


DRAINAGE MAT	SIZE	PACK	COVERAGE (ft^2)
 **SikaWall-9460 Drainage Mat DF** A composite, dual function product consisting of a durable polymer entangled filament core that is thermally bonded to spun bonded continuous bi-component fiber non-woven fabric.	39" x 61.5	4/case	200

ACCESSORIES	SIZE	PACK	COVERAGE (ft^2)
 **SikaWall®-9000 Sheathing Fabric** Reinforced, non-woven, polyester fabric designed for use with Sika Facades air/water-resistive barriers.	4" x 180' 6" x 180' 9" x 180'	18 rolls/case 12 rolls/case 12 rolls/case	180 LF 180 LF 180 LF
 **SikaWall®-85 Flash Seal NP** SikaWall®-85 Flash Seal NP is a 32-mil thick, self adhering, self sealing, composite membrane of polyester fabric and butyl adhesive. SikaWall®-85 Flash Seal NP is supplied in rolls, on release paper, for easy application.	4" x 75' 6" x 75' 9" x 75'	9 rolls/carton 6 rolls/carton 4 rolls/carton	675 LF /carton 675 LF /carton 675 LF /carton




FASTWALL® WATERMASTER SYSTEMS


FASTWALL 100 WATERMASTER STUCCO

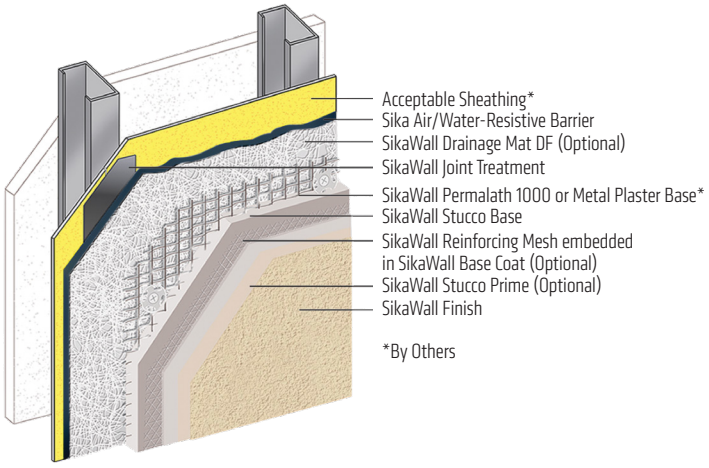

FASTWALL 300 WATERMASTER STUCCO

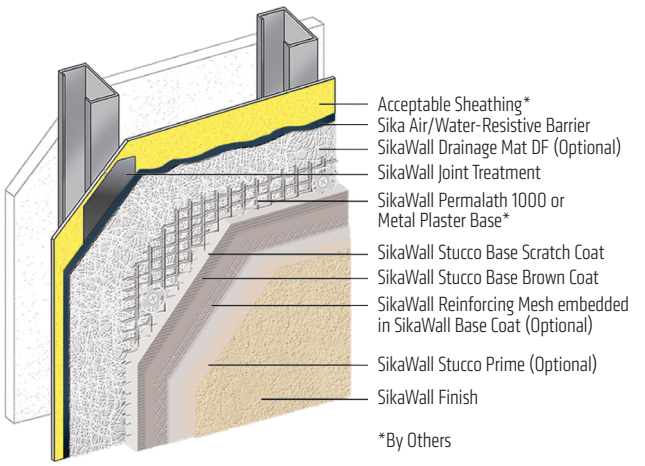

FASTWALL WATERMASTER MVA

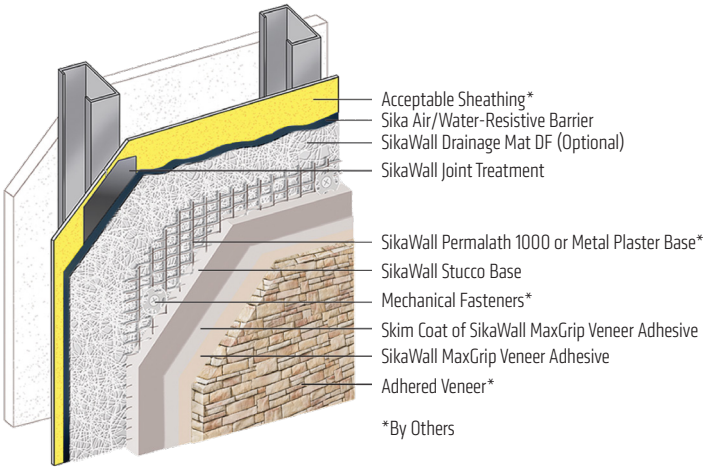

MORE SYSTEMS...



since 1986 since 1997

Our most current General Sales Conditions shall apply.
Please consult the Data Sheet prior to any use and processing

© 2026 Sika Corporation, 14001038 rev 10/2026

Sika Corporation
201 Polito Avenue
Lyndhurst, NJ 07071 USA
Customer Service (8770 547-8822
Technical Service (800) 226-2424
usa.sika.com/eifs-stucco

BUILDING TRUST