

## PRODUCT DATA SHEET

# Sikaflex<sup>®</sup>-271 PowerCure

Accelerated glazing adhesive

## TYPICAL PRODUCT DATA (FURTHER VALUES SEE SAFETY DATA SHEET)

Chemical base	Polyurethane
Color (CQP001-1)	Black
Cure mechanism	Moisture-curing <sup>A</sup>
Density (uncured)	1.20 kg/l (10.0 lb/gal)
Non-sag properties (CQP061-1)	Very good
Application temperature	5 – 40 °C (41 – 104 °F)
Open time (CQP526-1)	10 minutes <sup>B</sup>
Early tensile lap-shear strength (CQP046-1 / ISO 4587)	See table 1
Shore A hardness (CQP023-1 / ISO 7619-1)	65
Tensile strength (CQP036-1 / ISO 527)	7 MPa (1000 psi)
Elongation at break (CQP036-1 / ISO 527)	300 %
Tear propagation resistance (CQP045-1 / ISO 34)	10 N/mm (55 pli)
Tensile lap-shear strength (CQP046-1 / ISO 4587)	5 MPa (720 psi)
Service temperature (CQP509-1 / CQP513-1)	-40 – 90 °C (-40 – 194 °F)
Shelf life (CQP016-1)	9 months

CQP = Corporate Quality Procedure <sup>A</sup> Provided by PowerCure <sup>B</sup> 23 °C (73 °F) / 50 % r.h.**DESCRIPTION**

Sikaflex<sup>®</sup>-271 PowerCure is an accelerated elastic polyurethane adhesive for glazing and vehicle-glass-replacement applications. Suitable for bonding materials relevant for direct glazing such as paints, glass, ceramic frits, painted and e-coated surfaces in commercial-vehicle production and repair.

Curing of Sikaflex<sup>®</sup>-271 PowerCure is accelerated by Sika's PowerCure technology which makes it largely independent of atmospheric conditions.

**PRODUCT BENEFITS**

- Accelerated curing and adhesion build-up
- Excellent application properties
- Ideal for glass replacement in commercial vehicles
- Low climate dependency of the curing speed with Sika<sup>®</sup> Booster
- High mechanical strength
- Solvent-free

**AREAS OF APPLICATION**

Sikaflex<sup>®</sup>-271 PowerCure is designed especially for manual direct-glazing application and vehicle-glass replacement in commercial vehicles. Thanks to the PowerCure Technology Sikaflex<sup>®</sup>-271 PowerCure exhibits a fast strength and adhesion build-up.

This product is suitable for experienced professional users only. Test with actual substrates and conditions have to be performed to ensure adhesion and material compatibility.

**PRODUCT DATA SHEET**

Sikaflex<sup>®</sup>-271 PowerCure  
Version 01.01 (04 - 2021), en\_US  
012001252710001000

## CURE MECHANISM

Sikaflex®-271 PowerCure cures by reaction with moisture provided by the accelerator paste and largely independent from atmospheric moisture. For typical strength build up data see table below.

Time [h]	Tensile lap-shear strength at 23 °C (73 °F) [MPa]
1	0.7 (100 psi)
2	3.5 (510 psi)

Table 1: Strength build-up of Sikaflex®-271 PowerCure

## CHEMICAL RESISTANCE

Sikaflex®-271 PowerCure is generally resistant to fresh water, seawater, diluted acids and diluted caustic solutions; temporarily resistant to fuels, mineral oils, vegetable and animal fats and oils; not resistant to organic acids, glycolic alcohol, concentrated mineral acids and caustic solutions or solvents.

## METHOD OF APPLICATION

### Surface Preparation

Surfaces must be clean, dry and free from grease, oil and dust. Surface treatment depends on the specific nature of the substrates and is crucial for a long lasting bond. All pre-treatment steps must be confirmed by preliminary tests on original substrates considering specific conditions in the assembly process.

### Application

Setup the PowerCure Dispenser according to the PowerCure User Manual. If the application is discontinued for more than 2 minutes, the mixer needs to be replaced.

Sikaflex®-271 PowerCure can be processed between 5 °C and 40 °C (41 °F and 104 °F) but changes in reactivity as well as application properties need to be considered. The optimum temperature for substrate and adhesive is between 15 °C and 25 °C (59 °F and 77 °F).

The open time is significantly shorter in hot and humid climate. The parts must always be joint within the open time. As a rule of thumb, a change of + 10 °C (+ 18 °F) reduces the open time by half.

To ensure a uniform thickness of the bondline it is recommended to apply the adhesive in form of a triangular bead (see figure 1).

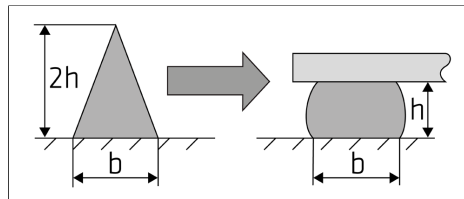


Figure 1: Recommended bead configuration

## Removal

Uncured Sikaflex®-271 PowerCure can be removed from tools and equipment with Sika® Remover-208 or another suitable solvent. Once cured, the material can only be removed mechanically. Hands and exposed skin have to be washed immediately using a suitable industrial hand cleaner and water.

Do not use solvents on skin.

## FURTHER INFORMATION

The information herein is offered for general guidance only. Advice on specific applications is available on request from the Technical Department of Sika Industry.

Copies of the following publications are available on request:

- Safety Data Sheets
- General Guidelines  
Bonding and Sealing with 1-component Sikaflex®
- PowerCure User Manual
- PowerCure Quick Reference Guide

## PACKAGING INFORMATION

PowerCure Pack	600 ml
----------------	--------

## BASIS OF PRODUCT DATA

All technical data stated in this document are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

## ENVIRONMENTAL, HEALTH AND SAFETY

For further information and advice regarding transportation, handling, storage and disposal of chemical products, user should refer to the actual Safety Data Sheets containing physical, environmental, toxicological and other safety related data. User must read the current actual Safety Data Sheets before using any products. In case of an emergency, call CHEMTREC at 1-800-424-9300, International 703-527-3887.

## LEGAL DISCLAIMER

Prior to each use of any product of Sika Corporation, its subsidiaries or affiliates ("SIKA"), the user must always read and follow the warnings and instructions on the product's most current product label, Product Data Sheet and Safety Data Sheet which are available at [usa.sika.com](http://usa.sika.com) or by contacting SIKA's Technical Service Department via email at [tsmh@us.sika.com](mailto:tsmh@us.sika.com). Nothing contained in any SIKA literature or materials relieves the user of the obligation to read and follow the warnings and instructions for each SIKA product as set forth in the current product label, Product Data Sheet and Safety Data Sheet prior to use of the SIKA product.

SIKA warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within the product's shelf life. User determines suitability of product for intended use and assumes all risks. User's and/or buyer's sole remedy shall be limited to the purchase price or replacement of this product exclusive of any labor costs. **NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.** Sale of SIKA products are subject to the Terms and Conditions of Sale which are available at <https://usa.sika.com/en/group/SikaCorp/termsandconditions.html> or by calling +1 800-933-7452.

## PRODUCT DATA SHEET

Sikaflex®-271 PowerCure  
Version 01.01 (04 - 2021), en\_US  
012001252710001000

## Sika Corporation

30800 Stephenson Highway  
Madison Heights, MI 48071  
U.S.A.  
Telephone: +1 248-577-0020  
Email: [tsmh@us.sika.com](mailto:tsmh@us.sika.com)  
[www.sikausa.com](http://www.sikausa.com)

