

SYSTEM DATA SHEET

Sikafloor® DecoDur Flake FX

DECORATIVE FLAKE BROADCAST SYSTEM ENGINEERED WITH SIKAFLOOR® - 264
@ 50 - 100 mils (1.3 - 2.5 MM)

PRODUCT DESCRIPTION

Sikafloor® DecoDur Flake FX is an aesthetic, easy to clean, seamless floor using epoxy binder that is broadcast with a colored vinyl flake blend and sealed with a clear, or UV stable topcoat. The system is customizable with an extensive blend palette and may be double broadcast for increased thickness. Finish surface options include: integral cove base, and variable surface texture to produce a range of slip-resistant finishes. Sikafloor® DecoDur Flake FX is typically installed @ 50 - 100 mils (1.3 - 2.5 mm).

USES

Sikafloor® DecoDur Flake FX may only be used by experienced professionals.

- Cafeterias and restaurants
- Education facilities
- Retail stores
- Laboratories and clinics
- Healthcare facilities
- Lobbies and public spaces


CHARACTERISTICS / ADVANTAGES

- Easy to maintain seamless surface
- Durable, impermeable and seamless
- Abrasion, impact and chemical resistant
- Optional integral cove base and curbs without joints
- Low odor / low VOC

SYSTEM INFORMATION

System Structure

Sikafloor® DecoDur Flake FX ~ 50 - 100 mils (1.3 - 2.5 mm)

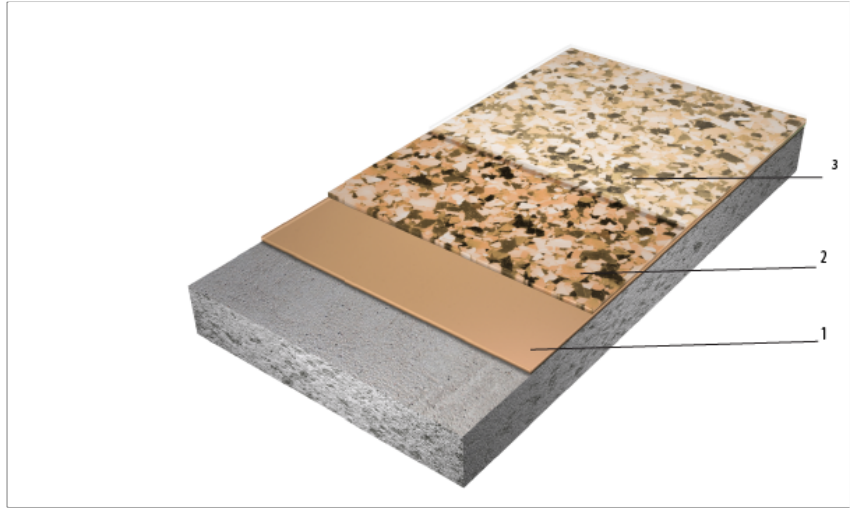

*Single Broadcast System

Description	Products	Thickness mils
1. Primer	Sikafloor®-161	8 - 10
2. Receiver Coat	Sikafloor®-264 + Sika Decorative Flake	10 - 12
3. Top Coat	Sikafloor®-217	10 - 12

** Double Broadcast System

1. Primer	Sikafloor®-161	8 - 10
2. Receiver Coat	Sikafloor®-264 + Sika Decorative Flake	10 - 12
3. 2 nd Receiver Coat	Sikafloor®-217 + Sika Decorative Flake	12 - 16
4. Top Coat	Sikafloor®-217	10 - 12

***Options

Primers	Sikafloor®-1610	8 - 10
	Sikafloor®-165 FS	8 - 10
	Sikafloor®-511*	
Alternate Receiver Coat	+ Sikafloor®-SCO Color	15 - 18
Alternate Top Coat	Sikafloor®-511*	8 - 12
	Sikafloor®-511*	12 - 15
2 nd Top Coats	Sikafloor®-217**	12 - 15
	Sikafloor®-304 W NA**	5 - 8
	Sikafloor®-340***	4 - 6
	Sikafloor®-315 N**	4 - 6

*Sikafloor- 264 and Sikafloor-217 may be replaced by Sikafloor-511 for greater UV resistance, fast cure time

**Sikafloor-304 W NA would be an optional 2nd top coat on top of Sikafloor-217 for gloss reduction or matte finish required

*** Sikafloor-340 and Sikafloor-315 N clear would be an optional 2nd top coat on top of Sikafloor-217 increased chemical resistance

Color	Available in various standard color blends, refer to Sikafloor® DecoFlake® color guide.
Nominal thickness	50 - 100 mils (1.3 - 2.5 mm)
Minimum thickness	50 mils (1.3 mm)
Volatile organic compound (VOC) content	Please refer to the individual Product Data Sheets.

TECHNICAL INFORMATION

Water Absorption	0.13 % 2 hours boiling	ASTM C413 at 73°F (23°C) and 50% R.H
Shore D Hardness	82	ASTM D2240 at 73°F (23°C) and 50% R.H
Abrasion Resistance	58 mg loss (CS-17/1000 rotations/1000g)	ASTM D4060 at 73°F (23°C) and 50% R.H
Compressive Strength	7,978 psi (55.0 MPa)	ASTM C579 at 73°F (23°C) and 50% R.H
Tensile Strength	5,078 psi (35.0 MPa)	ASTM D638 at 73°F (23°C) and 50% R.H
Flexural Strength	9,284 psi (64.0 MPa)	ASTM D790 at 73°F (23°C) and 50% R.H
Tensile Adhesion Strength	>400 psi (2.7 MPa) (100 % concrete failure)	ASTM D4541 at 73°F (23°C) and 50% R.H
Elongation at Break	15%	ASTM D638 at 73°F (23°C) and 50% R.H
Chemical Resistance	Contact Sika Technical Service for specific information.	
Permeability to Water Vapor	0.33 g/hour/sq.ft	ASTM E96 at 73°F (23°C) and 50% R.H
Coefficient of Friction	0.6	ANSI 326.3 at 73°F (23°C) and 50% R.H

APPLICATION INFORMATION

Coverage

*Single Broadcast System

Description	Products	Approximates Sq.Ft./kit
1. Primer	Sikafloor®-161	900@8mils
	Sikafloor®-264	720@10 mils
2. Receiver Coat	+ Sika Decorative Flake	2.16 bags per 4.5 gallon kit
3. Top Coat	Sikafloor®-217	720@10 mils

**Double Broadcast System

1. Primer	Sikafloor®-161	900@8mils
	Sikafloor®-264	720@10 mils
2. Receiver Coat	+ Sika Decorative Flake	2.16 bags per 4.5 gallon kit
	Sikafloor®-217	720@10 mils
3. 2 nd Receiver Coat	+ Sika Decorative Flake	2.16 bags per 4.5 gallon kit

Options

Primers	Sikafloor®-1610	900@8mils
	Sikafloor®-165 FS	1,000@8mils
	Sikafloor®-511	888@15mils
Alternate Receiver Coat	+ Sikafloor®-SCO Color Add	3 quarts per 8.33 gallon ki
	Sikafloor®-511	1,110@12mils
Alternate Top Coat	Sikafloor®-511	1,666@8mils
	Sikafloor®-217	900@8mils
2 nd Top Coats	Sikafloor®-304 W NA	595@5mils
	Sikafloor®-340	6,000@4mils
	Sikafloor®-315 N	2,400@4mils

Ambient Air Temperature Minimum/Maximum 50/85 °F (10/30 °C)

Substrate Temperature Minimum/Maximum 50/85 °F (10/30 °C)

PRODUCT INFORMATION

Packaging Please refer to the individual Product Data Sheet

Shelf Life Please refer to the individual Product Data Sheet

Storage Conditions Please refer to the individual Product Data Sheet

BASIS OF PRODUCT DATA

Results may differ based upon statistical variations depending upon mixing methods and equipment, temperature, application methods, test methods, actual site conditions and curing conditions.

LIMITATIONS

Please refer to the individual Product Data Sheet

ENVIRONMENTAL, HEALTH AND SAFETY

For further information and advice regarding transportation, handling, storage and disposal of chemical products, user should refer to the actual Safety Data Sheets containing physical, environmental, toxicological and other safety related data. User must read the current actual Safety Data Sheets before using any products. In case of an emergency, call CHEMTREC at 1-800-424-9300, International 703-527-3887.

APPLICATION INSTRUCTIONS

SUBSTRATE PREPARATION

Concrete surfaces must be clean and sound. Remove all dust, dirt, existing paint films, efflorescence, exudates, laitance, form oils, hydraulic or fuel oils, brake fluid, grease, fungus, mildew, biological residues or any other contaminants which may prohibit a good bond.

Prepare the surface by any appropriate mechanical means, in order to achieve a profile equivalent to ICRI - CSP 3-6. The compressive strength of the concrete substrate should be at least 3,625 psi (25 MPa) at 28 days and a minimum of 218 psi (1.5 MPa) in tension at the time of application.

Repairs to cementitious substrates, filling of blowholes, leveling of irregularities, etc. should be carried out using an appropriate Sika profiling mortar. Contact Sika Technical Service for a recommendation.

Primer

Priming for concrete substrate is required. Prime with either Sikafloor®- 160, Sikafloor®- 161, Sikafloor®- 1610 or Sikafloor®- 165 FS. Allow the primer to cure (varies with temperature and humidity) until tack free before applying subsequent membrane coats. Ensure that the primer is pore-free, pinhole-free and provides uniform and complete coverage over the entire substrate.

Please refer to the individual most current and respective Product Data Sheet for specific and detailed information.

Sika Corporation
201 Polito Avenue
Lyndhurst, NJ 07071
Phone: +1-800-933-7452
Fax: +1-201-933-6225
usa.sika.com

Sika Mexicana S.A. de C.V.
Carretera Libre Celaya Km. 8.5
Fracc. Industrial Balvanera
Corregidora, Queretaro
C.P. 76920
Phone: 52 442 2385800
Fax: 52 442 2250537



System Data Sheet
Sikafloor® DecoDur Flake FX
April 2021, Version 01.02
02081190000000167

MIXING

Please refer to the individual Product Data Sheet

APPLICATION

Please refer to the individual Product Data Sheet

OTHER RESTRICTIONS

See Legal Disclaimer.

LEGAL DISCLAIMER

- KEEP CONTAINER TIGHTLY CLOSED
- KEEP OUT OF REACH OF CHILDREN
- NOT FOR INTERNAL CONSUMPTION
- FOR INDUSTRIAL USE ONLY
- FOR PROFESSIONAL USE ONLY

Prior to each use of any product of Sika Corporation, its subsidiaries or affiliates ("SIKA"), the user must always read and follow the warnings and instructions on the product's most current product label, Product Data Sheet and Safety Data Sheet which are available at usa.sika.com or by calling SIKA's Technical Service Department at 1-800-933-7452. Nothing contained in any SIKA literature or materials relieves the user of the obligation to read and follow the warnings and instructions for each SIKA product as set forth in the current product label, Product Data Sheet and Safety Data Sheet prior to use of the SIKA product.

SIKA warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within the product's shelf life. User determines suitability of product for intended use and assumes all risks. User's and/or buyer's sole remedy shall be limited to the purchase price or replacement of this product exclusive of any labor costs. **NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.**

Sale of SIKA products are subject to the Terms and Conditions of Sale which are available at <https://usa.sika.com/en/group/SikaCorp/termsandconditions.html> or by calling 1-800-933-7452.

SikafloorDecoDurFlakeFX-en-US-(04-2021)-1-2.pdf

